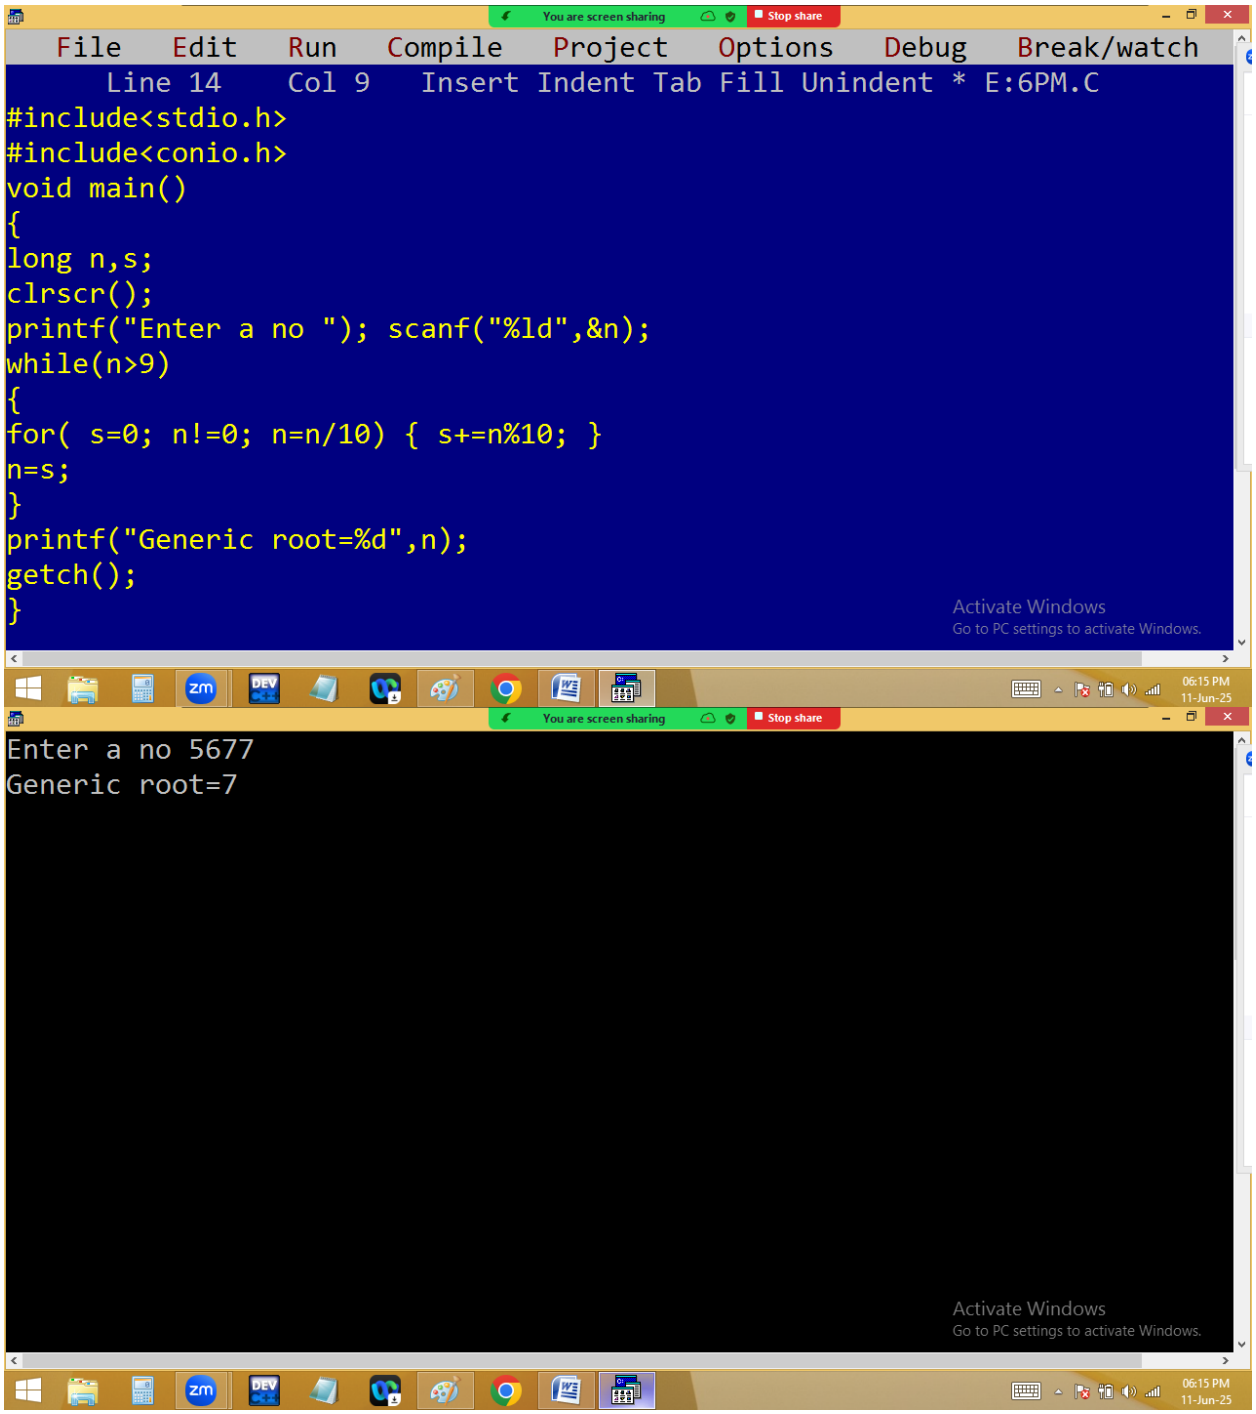
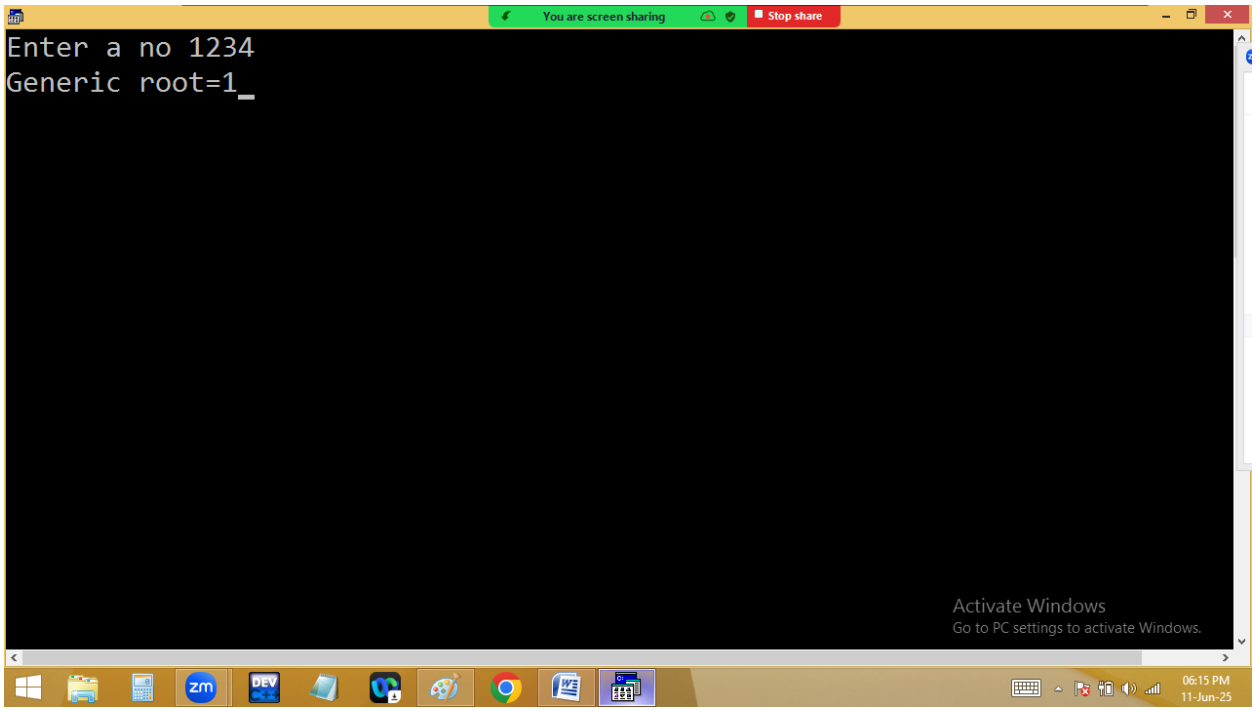
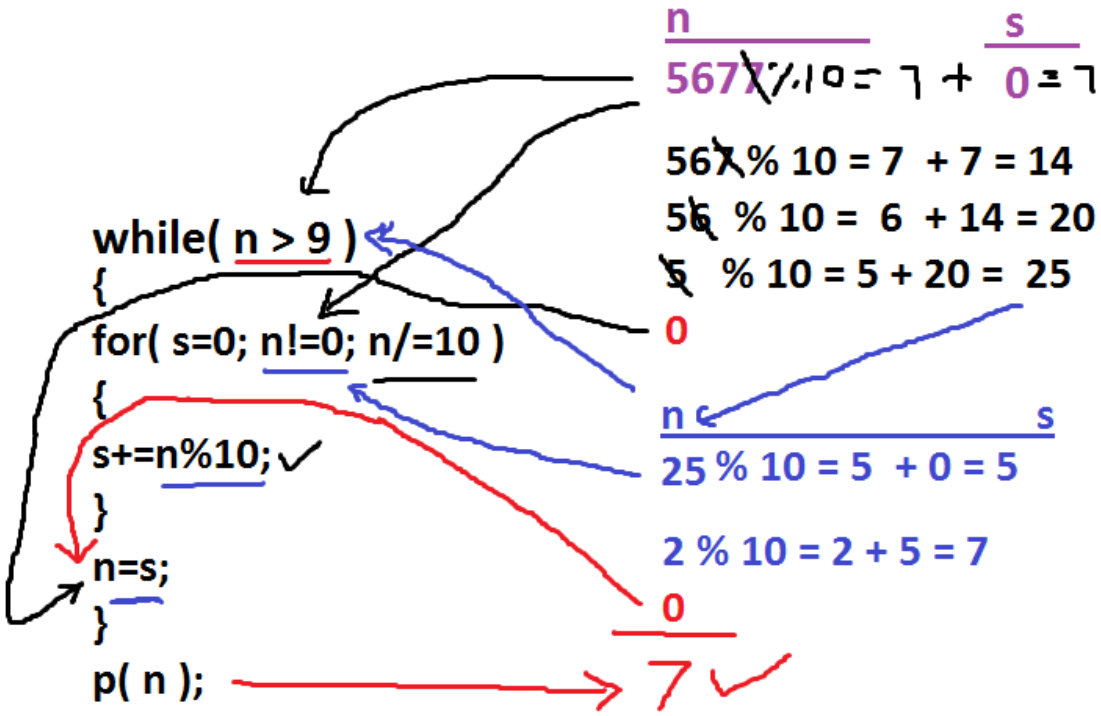
Finding generic root of given no?

5677 = 5+6+7+7=25 ➔ 2+5=7

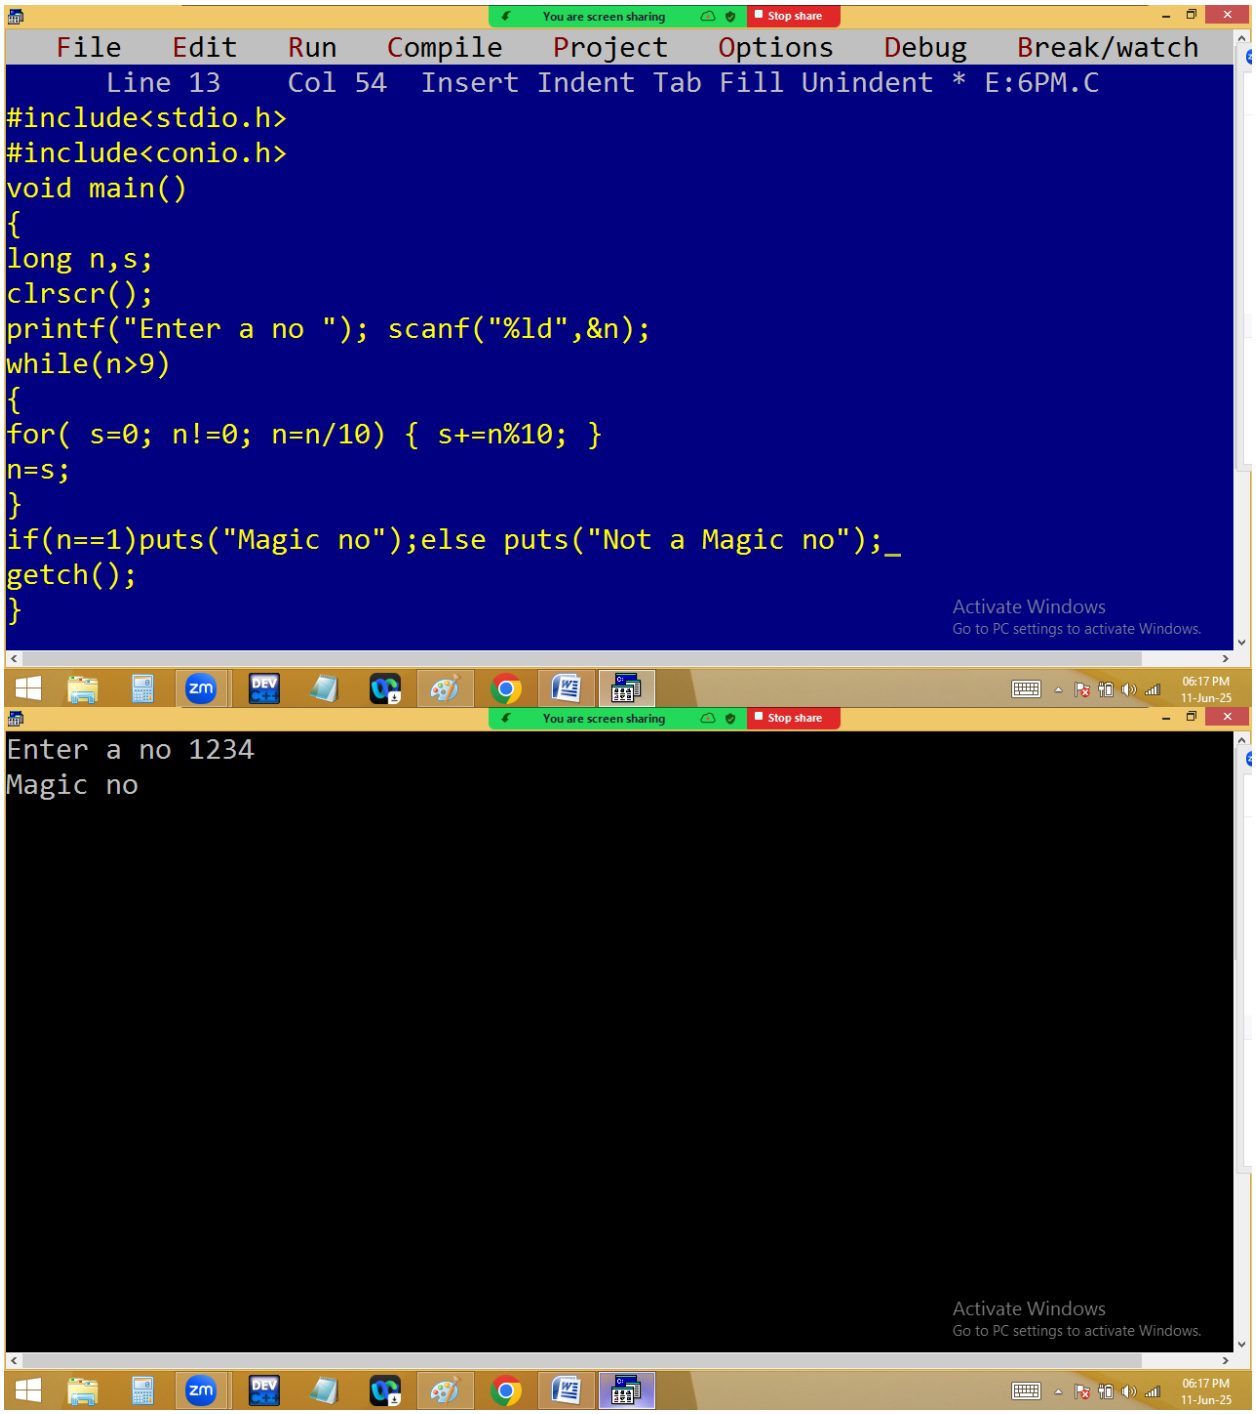



You are screen sharing
Stop share
Enter a no 1234
Generic root=1
Activate Windows
Go to PC settings to activate Windows.
06:15 PM
11-Jun-25


while(n > 9)
{
for(s=0; n!=0; n/=10)
{
s+=n%10;
}
n=s;
}
p(n);
n
s
567
% 10 = 7 + 0 = 7
56 % 10 = 6 + 14 = 20
5 % 10 = 5 + 20 = 25
0
n
s
25 % 10 = 5 + 0 = 5
2 % 10 = 2 + 5 = 7
0
7

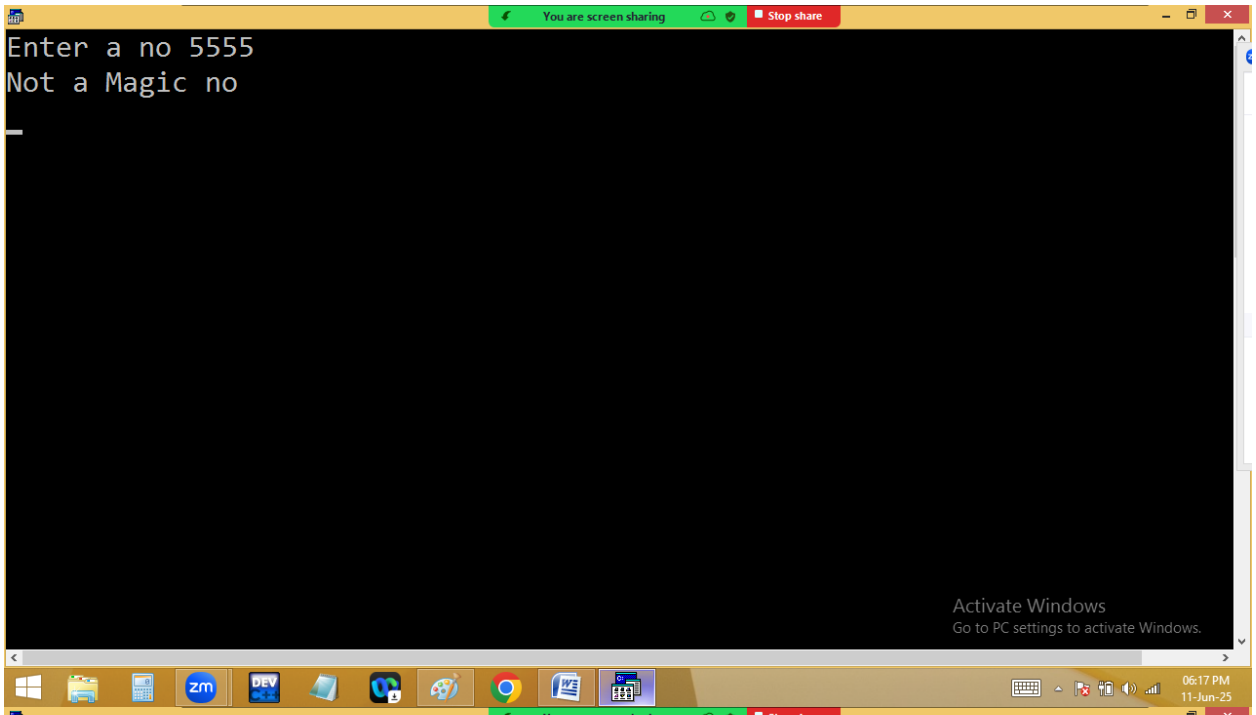
Finding magic no or not?

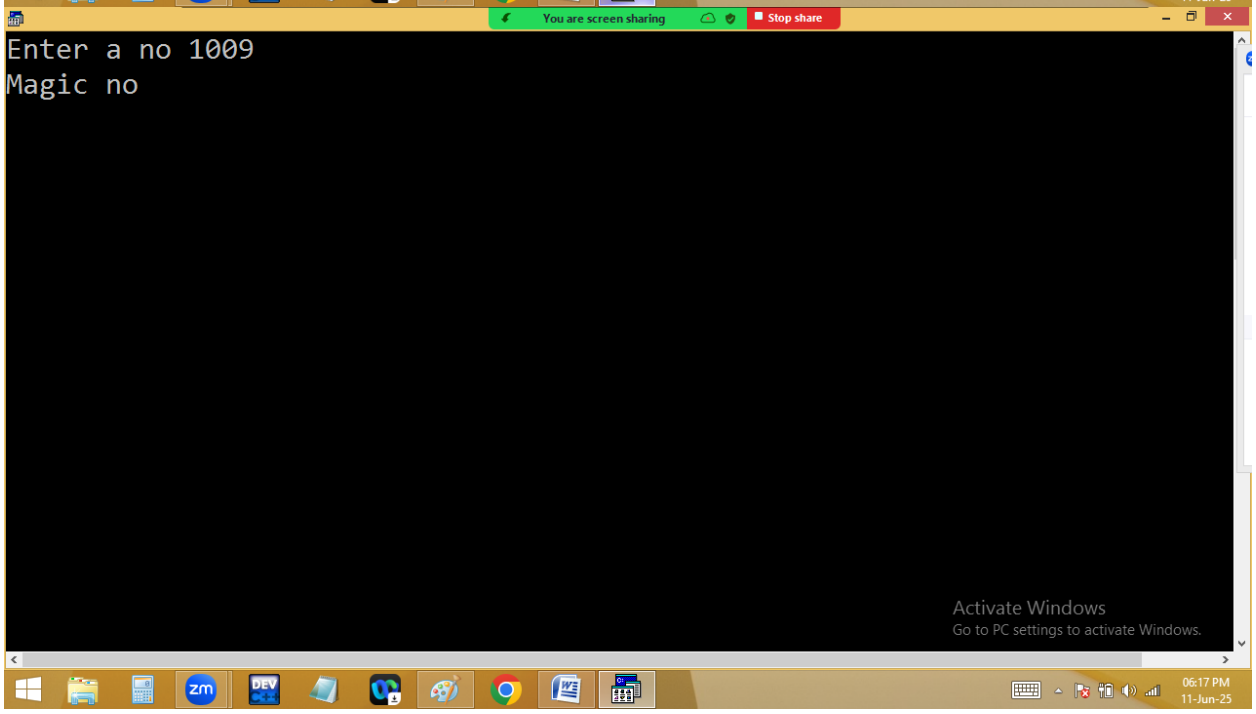
If the generic root is 1 it is a magic no.



```
File   Edit   Run   Compile   Project   Options   Debug   Break/watch
     Line 13    Col 54  Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
long n,s;
clrscr();
printf("Enter a no "); scanf("%ld",&n);
while(n>9)
{
for( s=0; n!=0; n=n/10) { s+=n%10; }
n=s;
}
if(n==1)puts("Magic no");else puts("Not a Magic no");_
getch();
}
```

```
Enter a no 1234
Magic no
```


You are screen sharing
Stop share
Enter a no 5555
Not a Magic no
Activate Windows
Go to PC settings to activate Windows.
06:17 PM
11-Jun-25


You are screen sharing
Stop share
Enter a no 1009
Magic no
Activate Windows
Go to PC settings to activate Windows.
06:17 PM
11-Jun-25

Finding strong no or not?

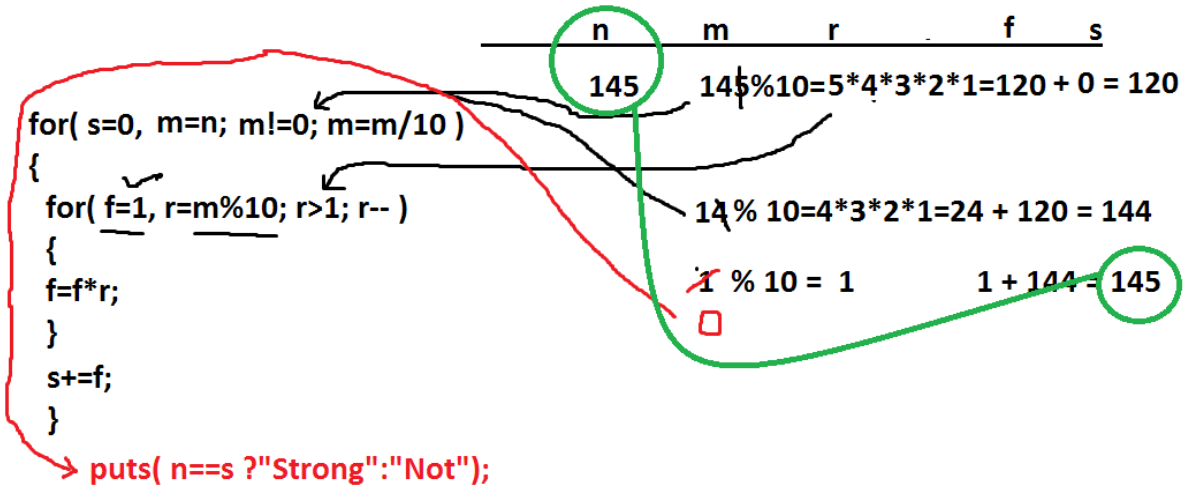
Sum of factorial of each digit is equal to given no.

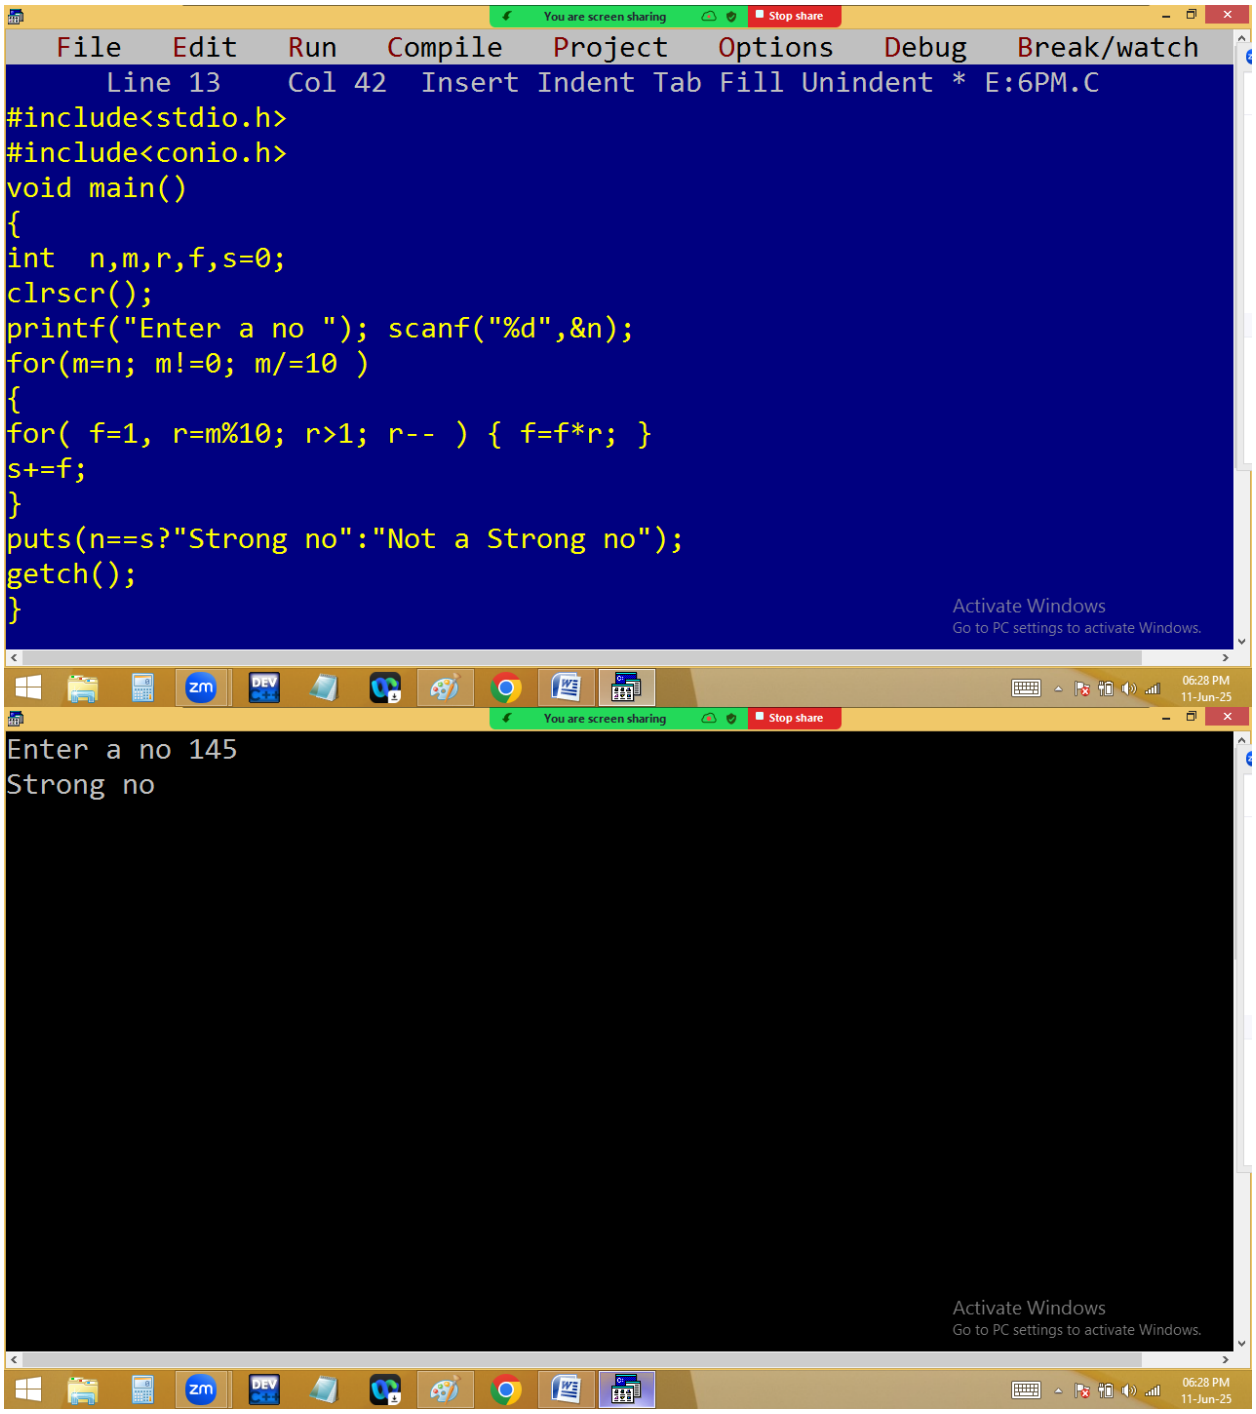
1 factorial is 1

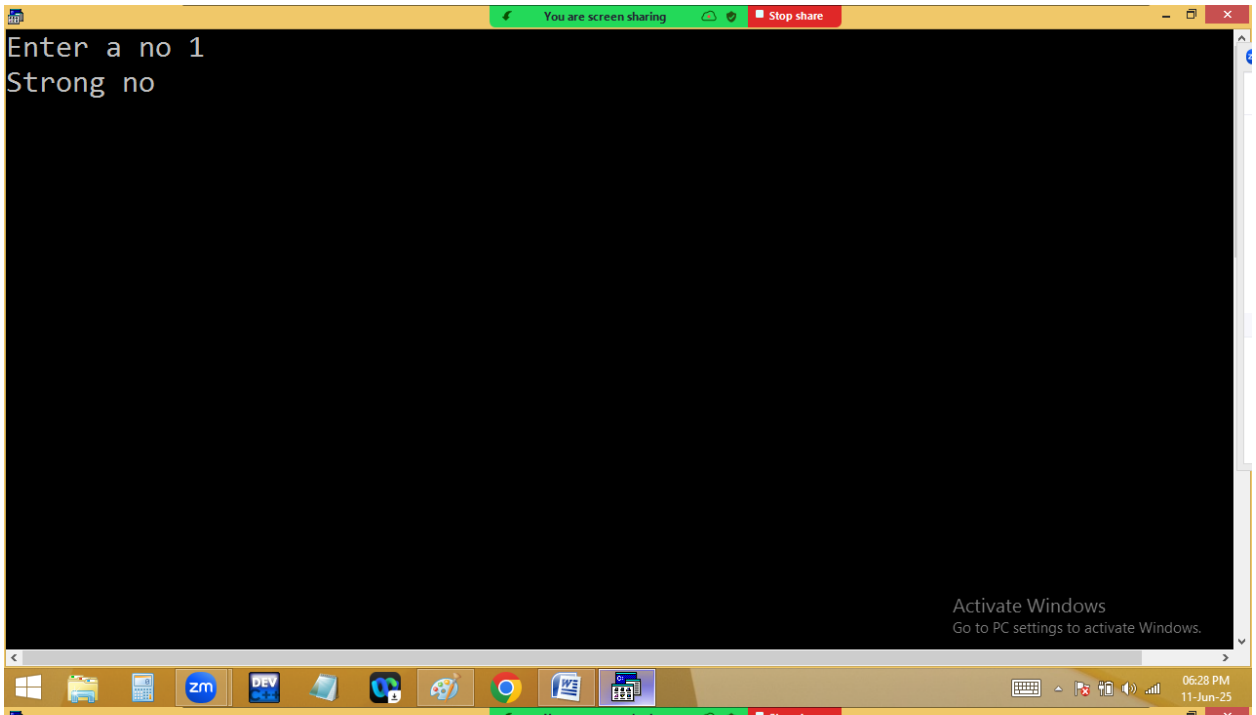
2 factorial is 2

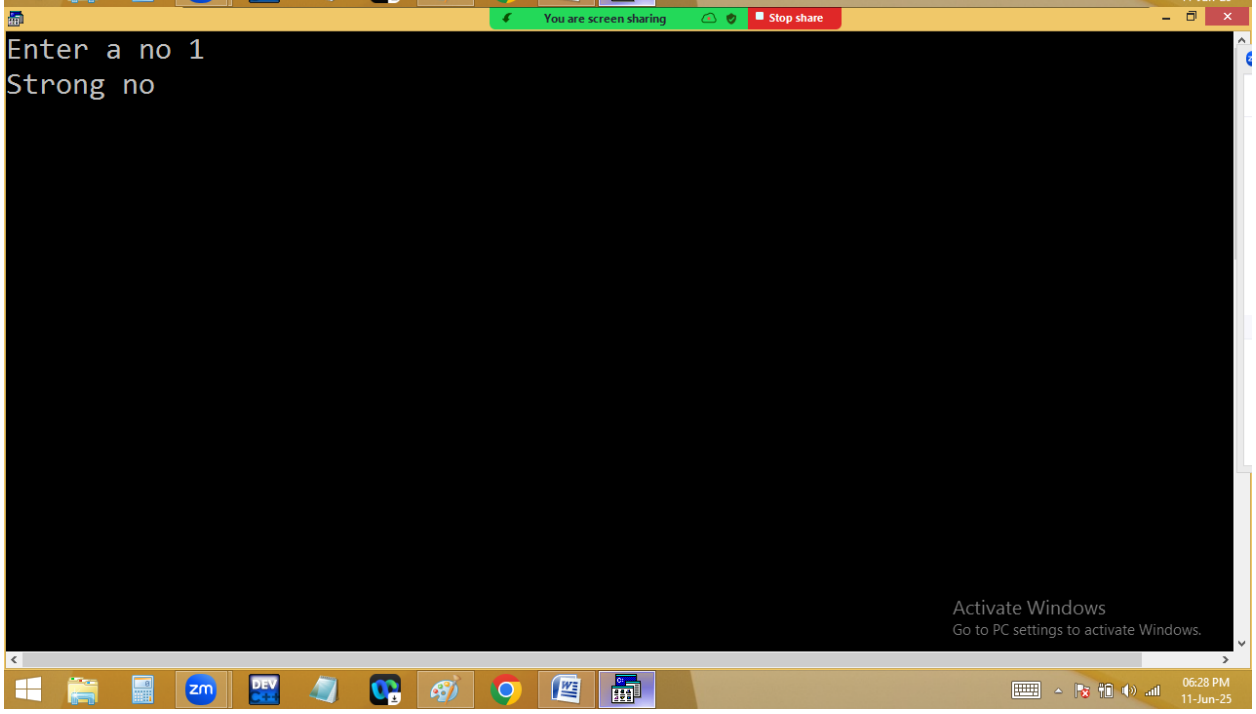
145 = 1! + 4! + 5! = 1 + 24 + 120 = 145

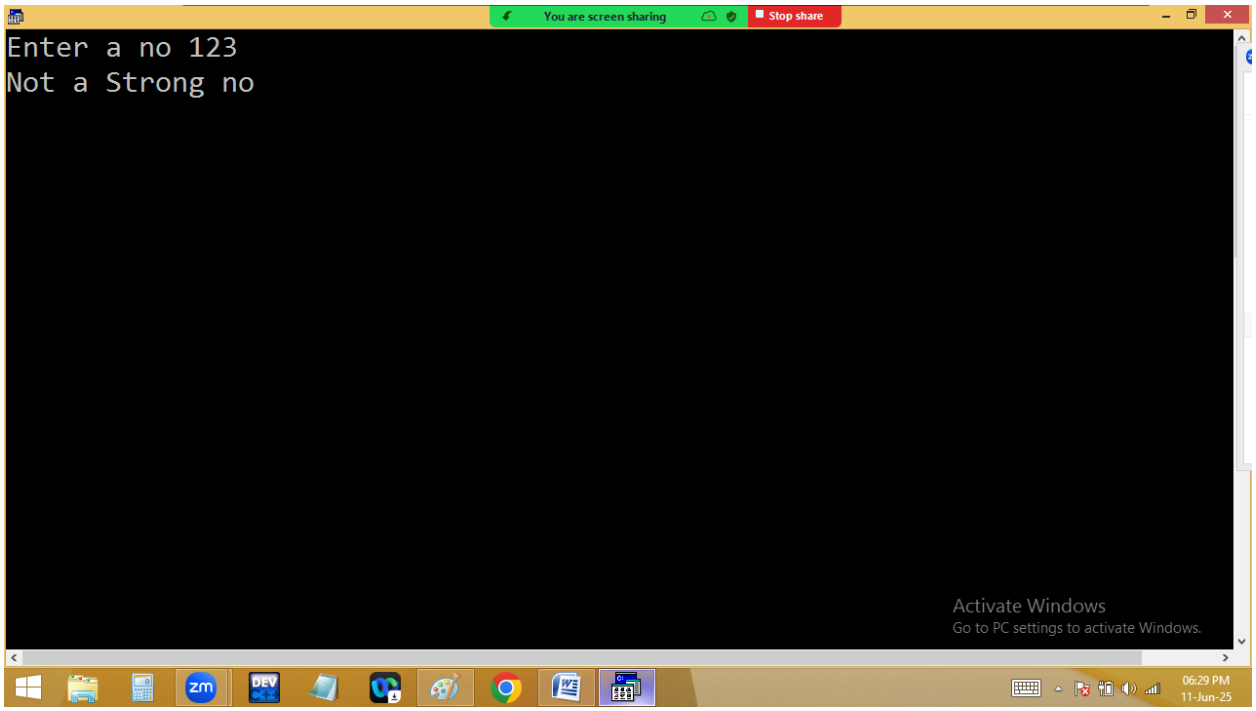
123 =1! + 2! + 3! = 1 + 2 + 6 = 9 ← not a strong no




You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 42 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int n,m,r,f,s=0;
clrscr();
printf("Enter a no "); scanf("%d",&n);
for(m=n; m!=0; m/=10)
{
for(f=1, r=m%10; r>1; r--) { f=f*r; }
s+=f;
}
puts(n==s?"Strong no":"Not a Strong no");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:28 PM
11-Jun-25
You are screen sharing
Stop share
Enter a no 145
Strong no
Activate Windows
Go to PC settings to activate Windows.
06:28 PM
11-Jun-25

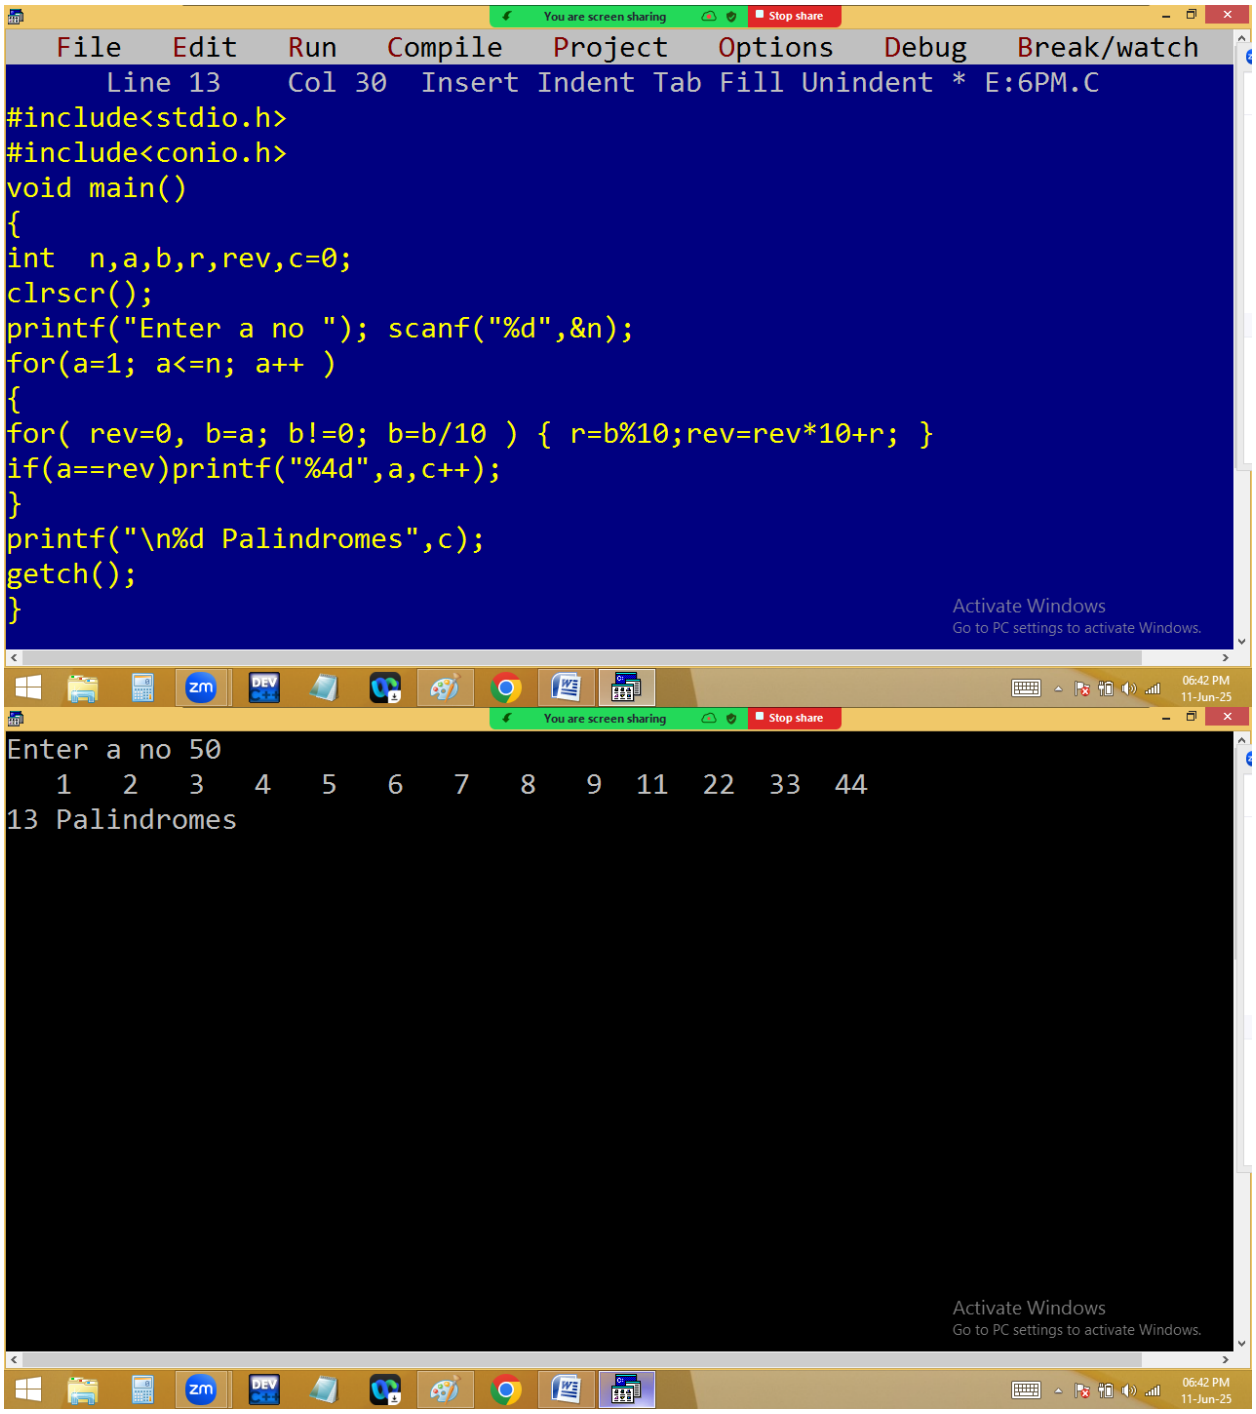

You are screen sharing
Stop share
Enter a no 1
Strong no
Activate Windows
Go to PC settings to activate Windows.
06:28 PM
11-Jun-25

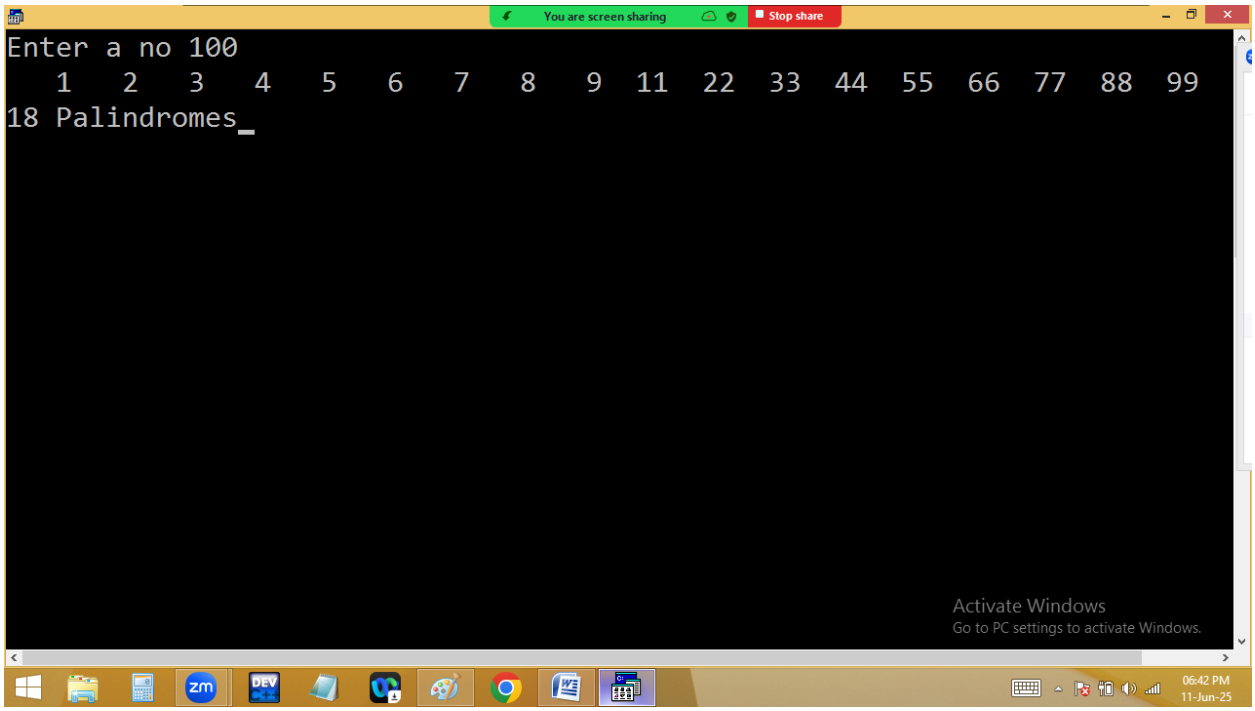

You are screen sharing
Stop share
Enter a no 1
Strong no
Activate Windows
Go to PC settings to activate Windows.
06:28 PM
11-Jun-25

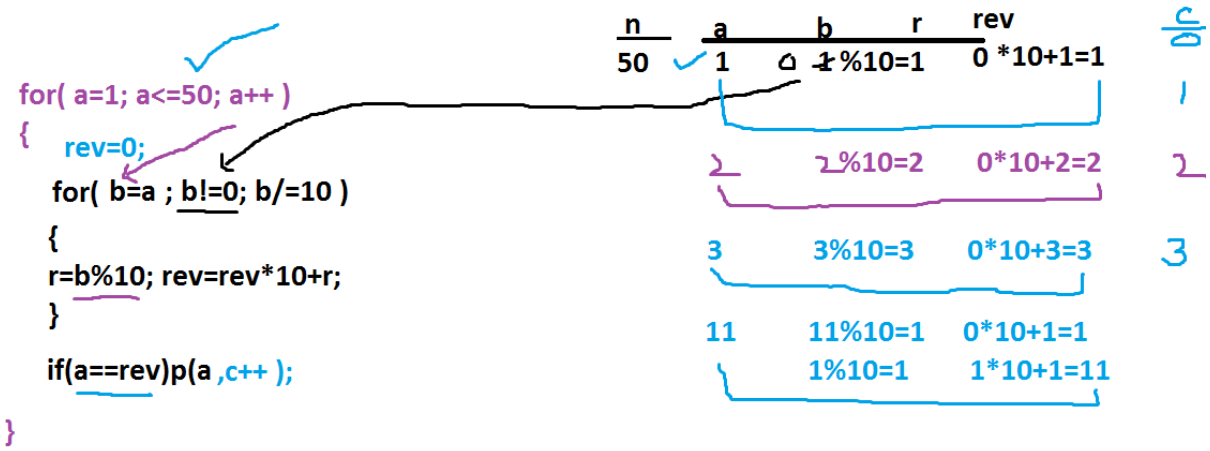


Printing 1..n palindromes and count?

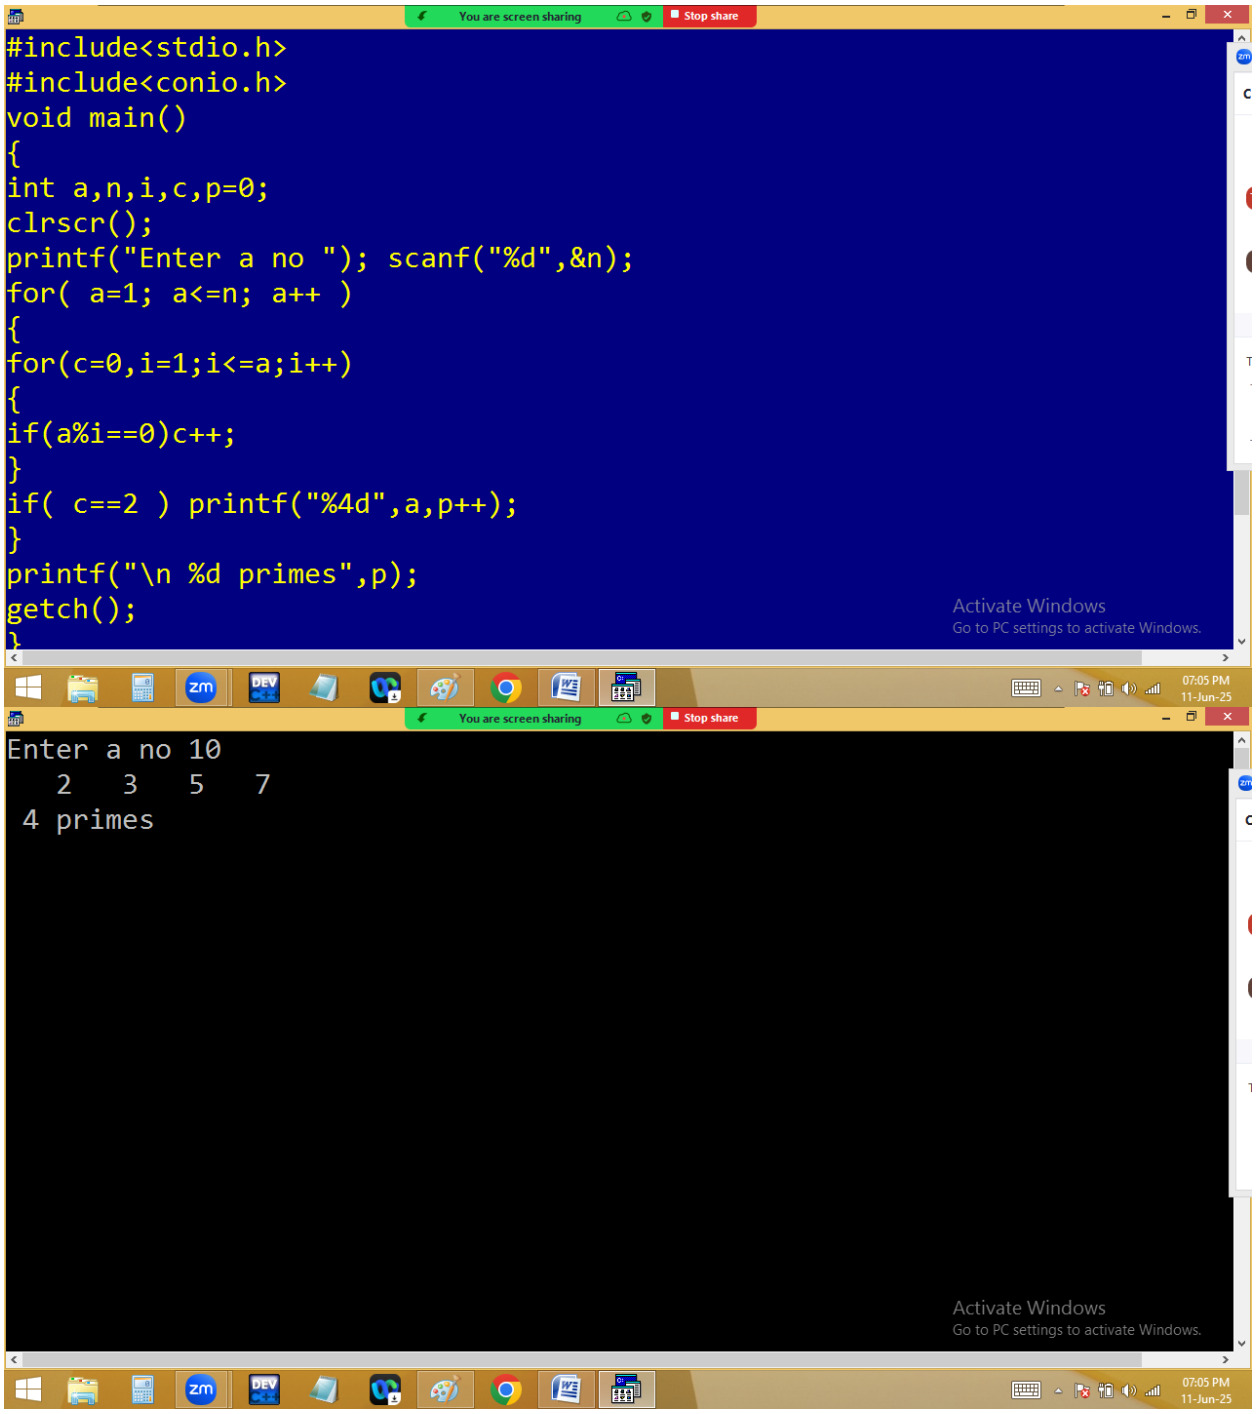
Eg: 1 to 50 palindromes are 1-9, 11, 22, 33, 44 – 13 palindromes

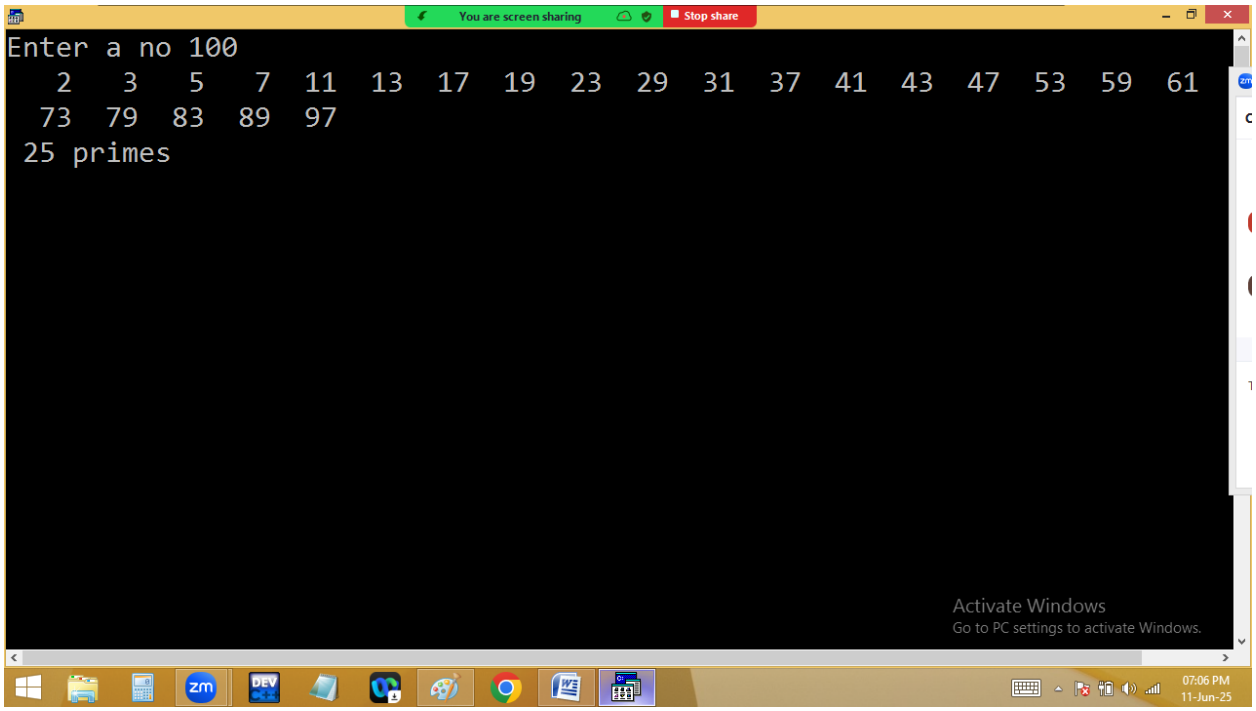

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 30 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int n,a,b,r,rev,c=0;
clrscr();
printf("Enter a no "); scanf("%d",&n);
for(a=1; a<=n; a++)
{
for(rev=0, b=a; b!=0; b=b/10) { r=b%10;rev=rev*10+r; }
if(a==rev)printf("%4d",a,c++);
}
printf("\n%d Palindromes",c);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:42 PM
11-Jun-25
You are screen sharing
Stop share
Enter a no 50
1 2 3 4 5 6 7 8 9 11 22 33 44
13 Palindromes
Activate Windows
Go to PC settings to activate Windows.
06:42 PM
11-Jun-25





Printing 1 to n prime no's and count?


You are screen sharing
Stop share
#include<stdio.h>
#include<conio.h>
void main()
{
int a,n,i,c,p=0;
clrscr();
printf("Enter a no "); scanf("%d",&n);
for(a=1; a<=n; a++)
{
for(c=0,i=1;i<=a;i++)
{
if(a%i==0)c++;
}
if(c==2) printf("%4d",a,p++);
}
printf("\n %d primes",p);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:05 PM
11-Jun-25
You are screen sharing
Stop share
Enter a no 10
2 3 5 7
4 primes
Activate Windows
Go to PC settings to activate Windows.
07:05 PM
11-Jun-25

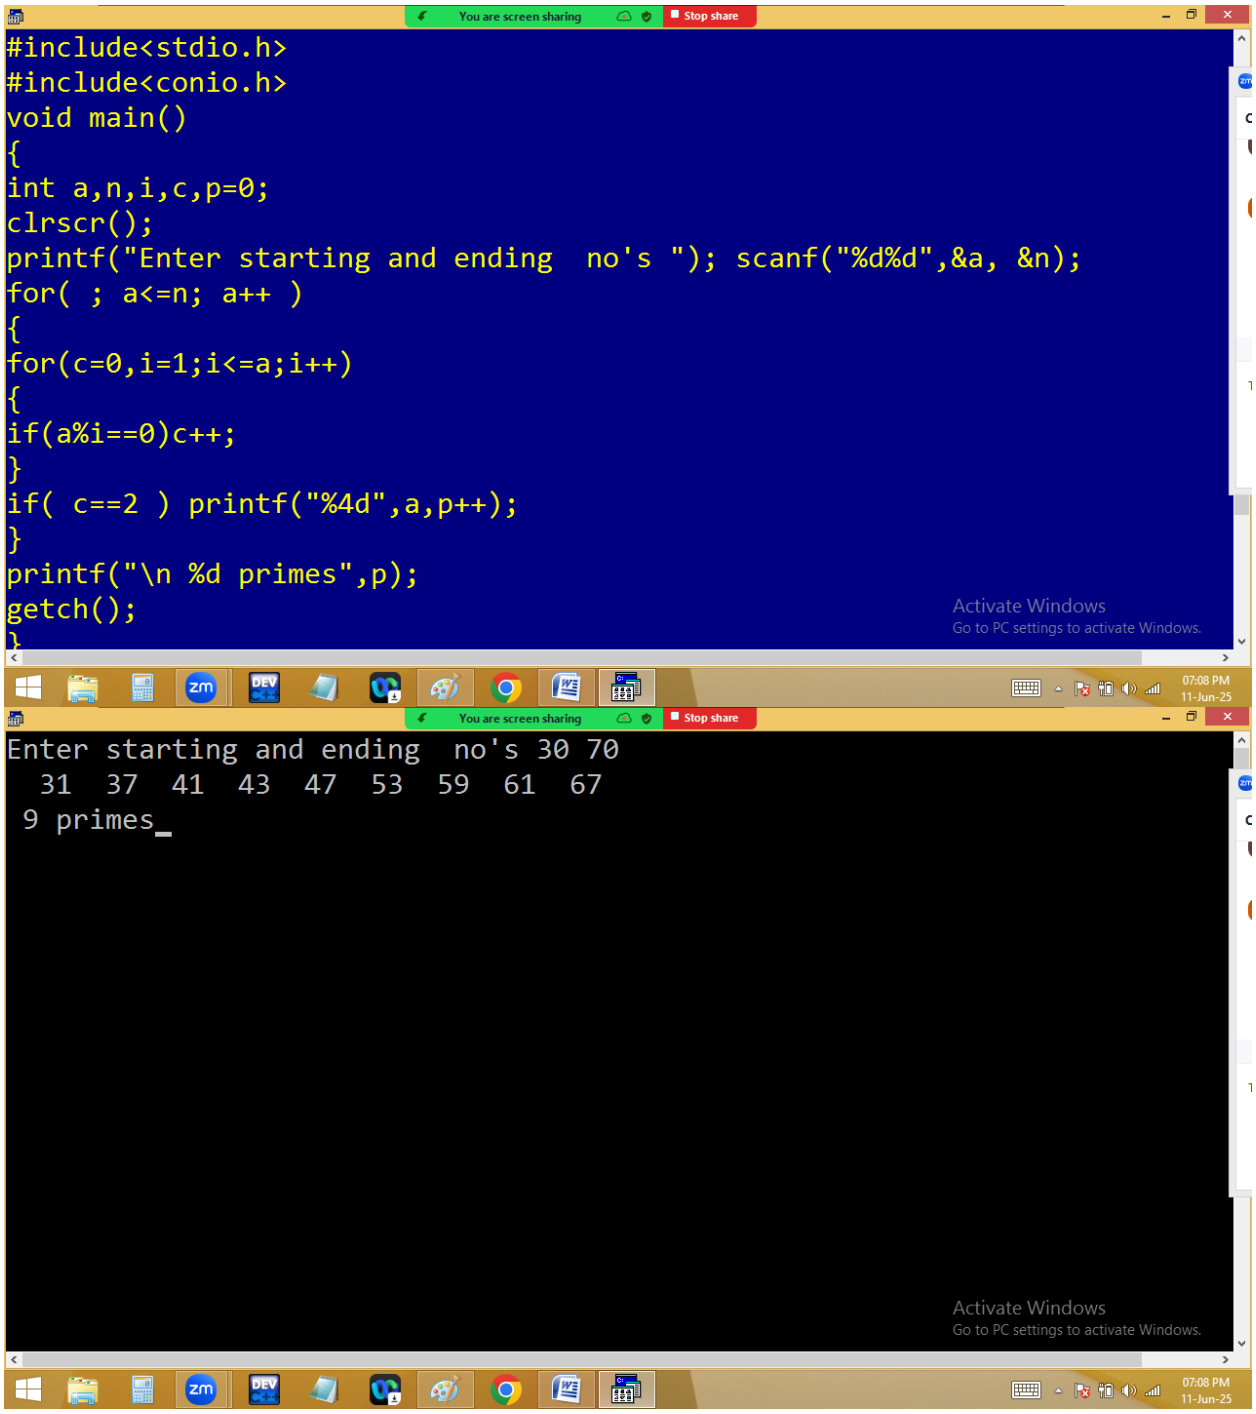


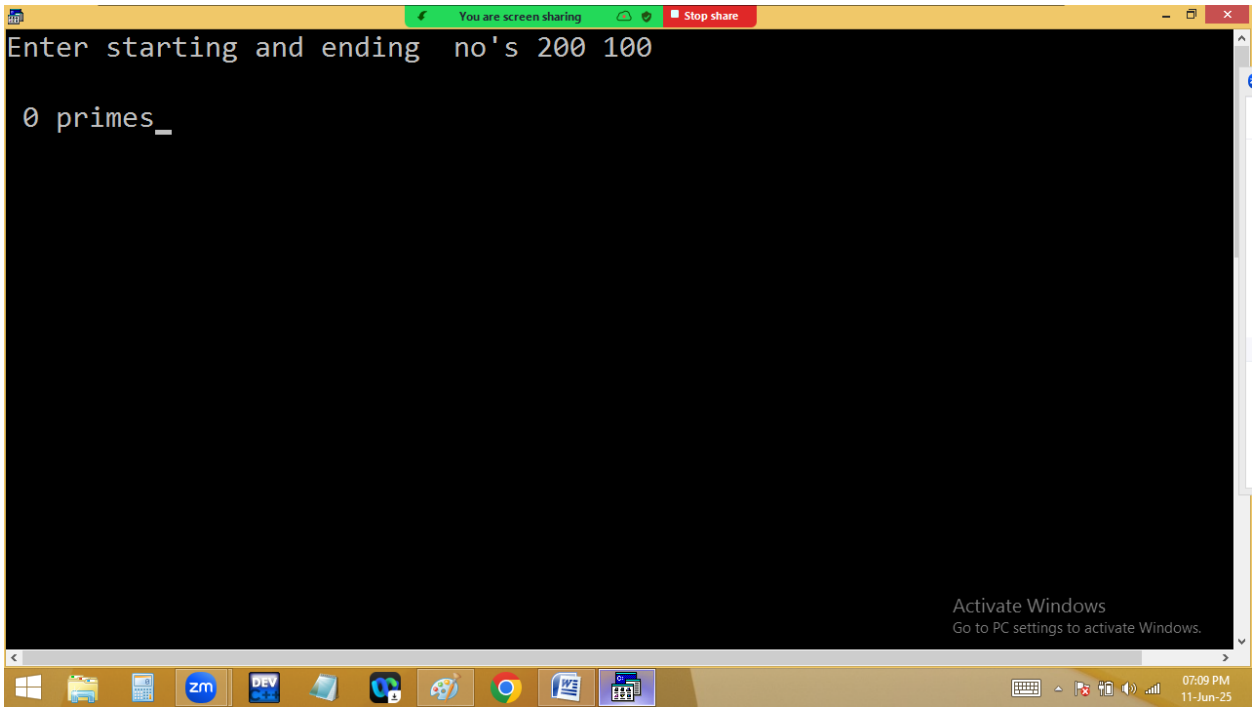

```
for( i=1; i<=n; i++ )
{
if( n%i==0 ) c++;
}

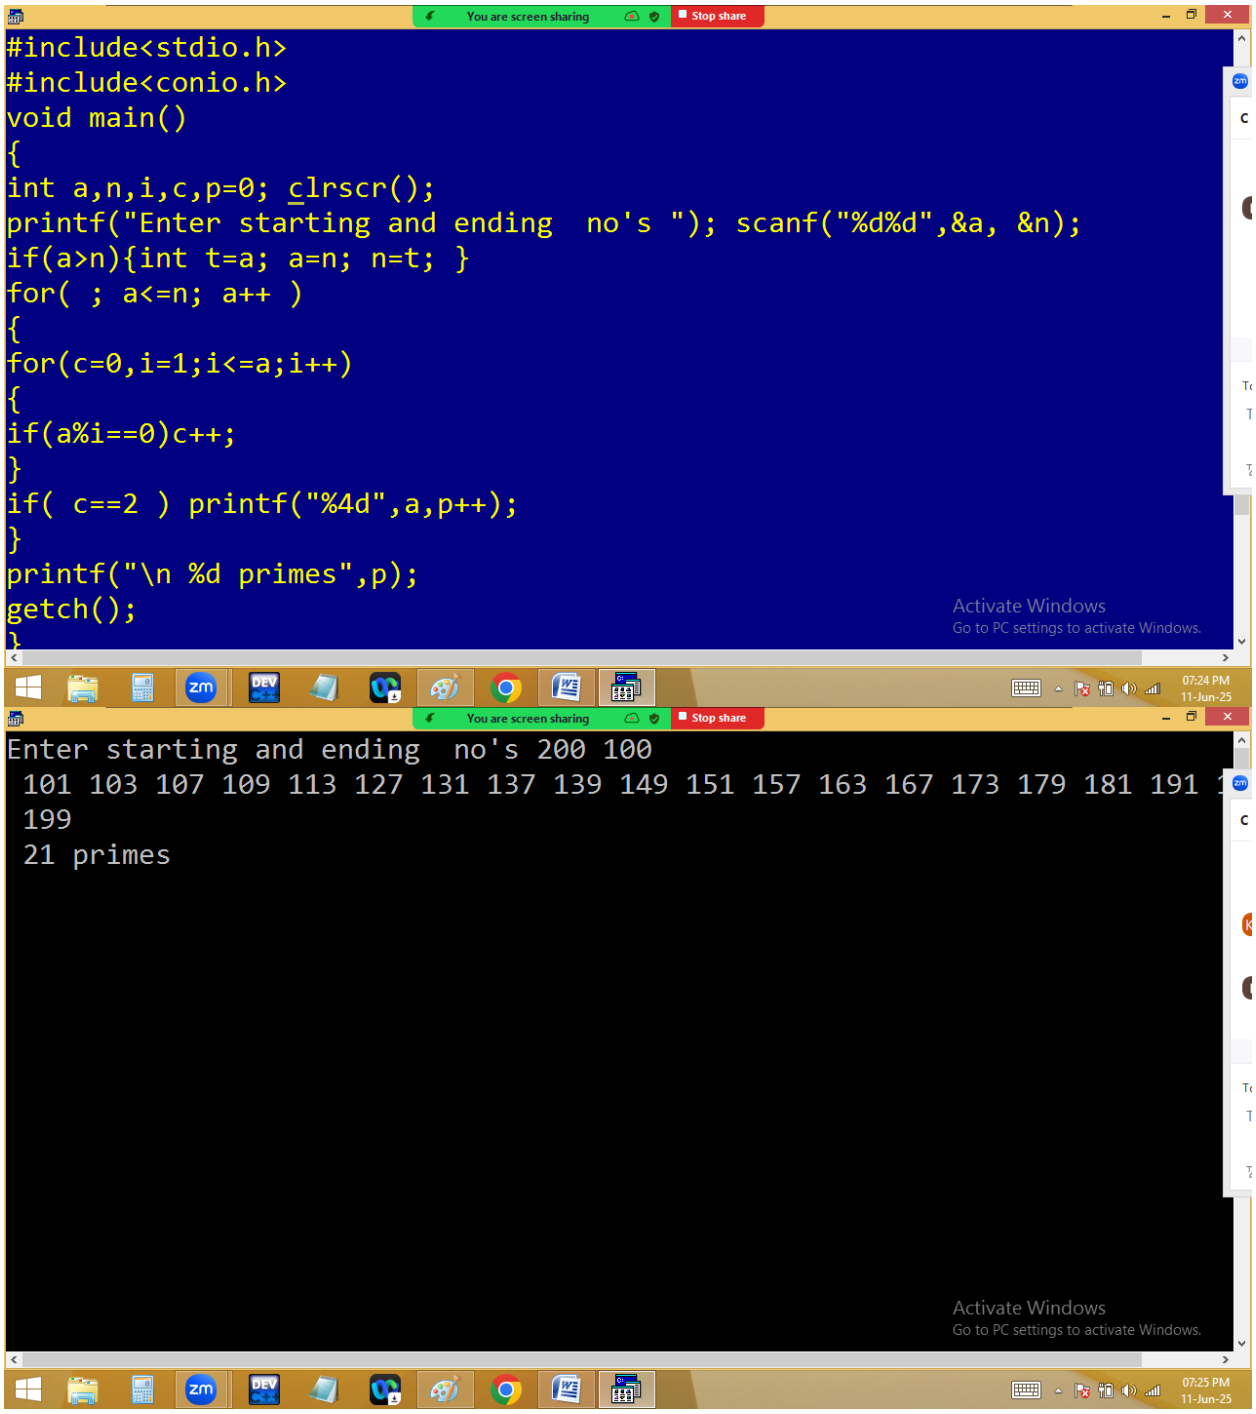
if( c==2 ) p(prime);
```

n	i	c
		0
5 %	1 = 0	1
5 %	2 = 1	
5 %	3 = 2	
5 %	4 = 1	
5 %	5 = 0	2

Print n to n primes and count?


You are screen sharing
Stop share
#include<stdio.h>
#include<conio.h>
void main()
{
int a,n,i,c,p=0;
clrscr();
printf("Enter starting and ending no's "); scanf("%d%d",&a, &n);
for(; a<=n; a++)
{
for(c=0,i=1;i<=a;i++)
{
if(a%i==0)c++;
}
if(c==2) printf("%4d",a,p++);
}
printf("\n %d primes",p);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:08 PM
11-Jun-25
You are screen sharing
Stop share
Enter starting and ending no's 30 70
31 37 41 43 47 53 59 61 67
9 primes
Activate Windows
Go to PC settings to activate Windows.
07:08 PM
11-Jun-25

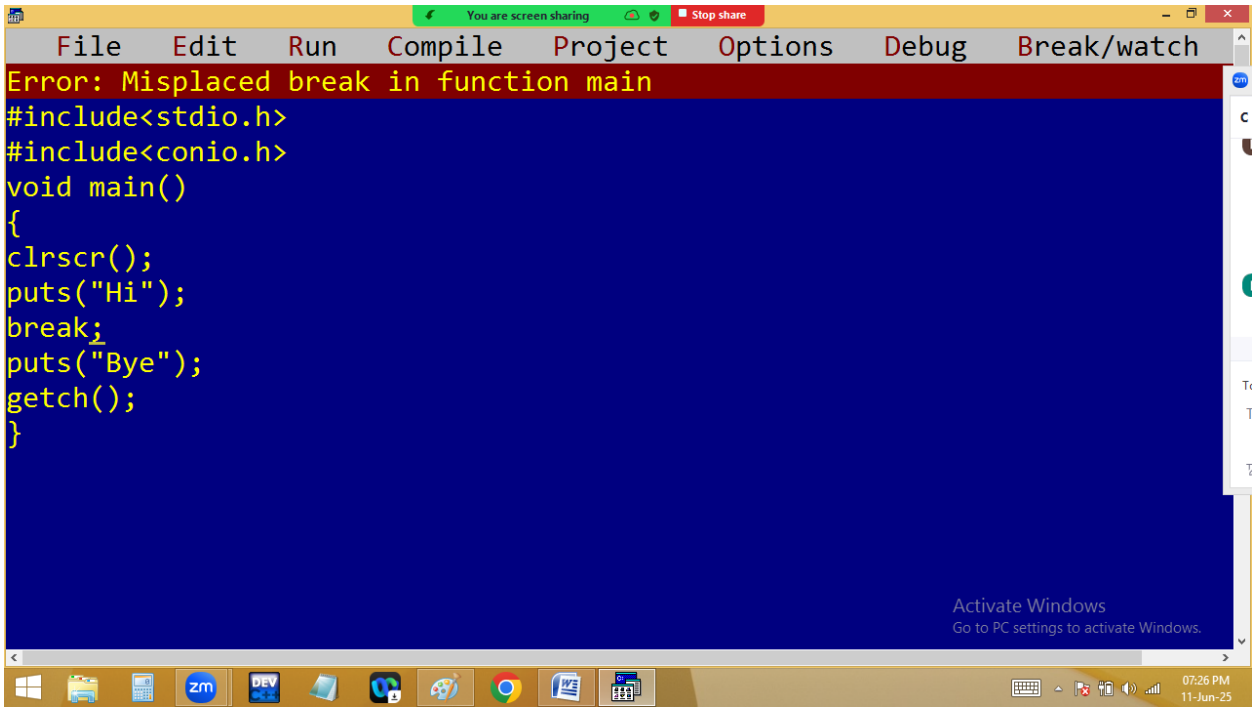

You are screen sharing
Stop share
Enter starting and ending no's 200 100
0 primes
Activate Windows
Go to PC settings to activate Windows.
07:09 PM
11-Jun-25

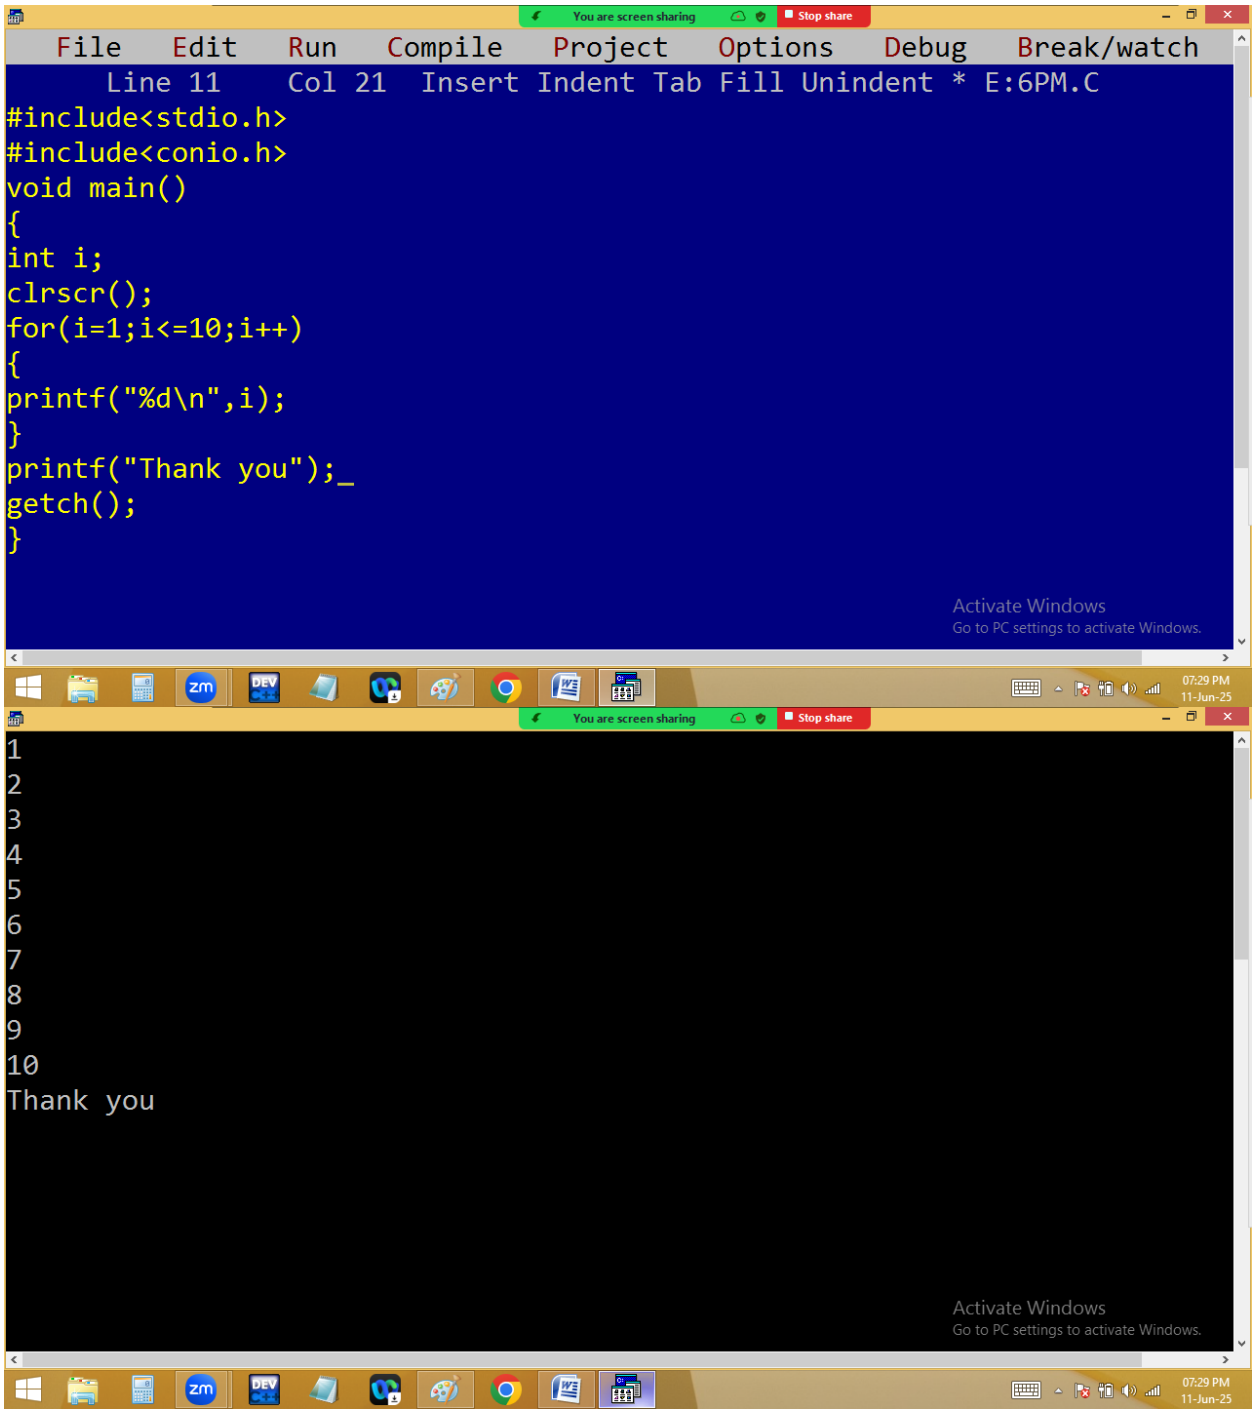

You are screen sharing
Stop share
#include<stdio.h>
#include<conio.h>
void main()
{
int a,n,i,c,p=0; clrscr();
printf("Enter starting and ending no's "); scanf("%d%d",&a, &n);
if(a>n){int t=a; a=n; n=t; }
for(; a<=n; a++)
{
for(c=0,i=1;i<=a;i++)
{
if(a%i==0)c++;
}
if(c==2) printf("%4d",a,p++);
}
printf("\n %d primes",p);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:24 PM
11-Jun-25
You are screen sharing
Stop share
Enter starting and ending no's 200 100
101 103 107 109 113 127 131 137 139 149 151 157 163 167 173 179 181 191
199
21 primes
Activate Windows
Go to PC settings to activate Windows.
07:25 PM
11-Jun-25

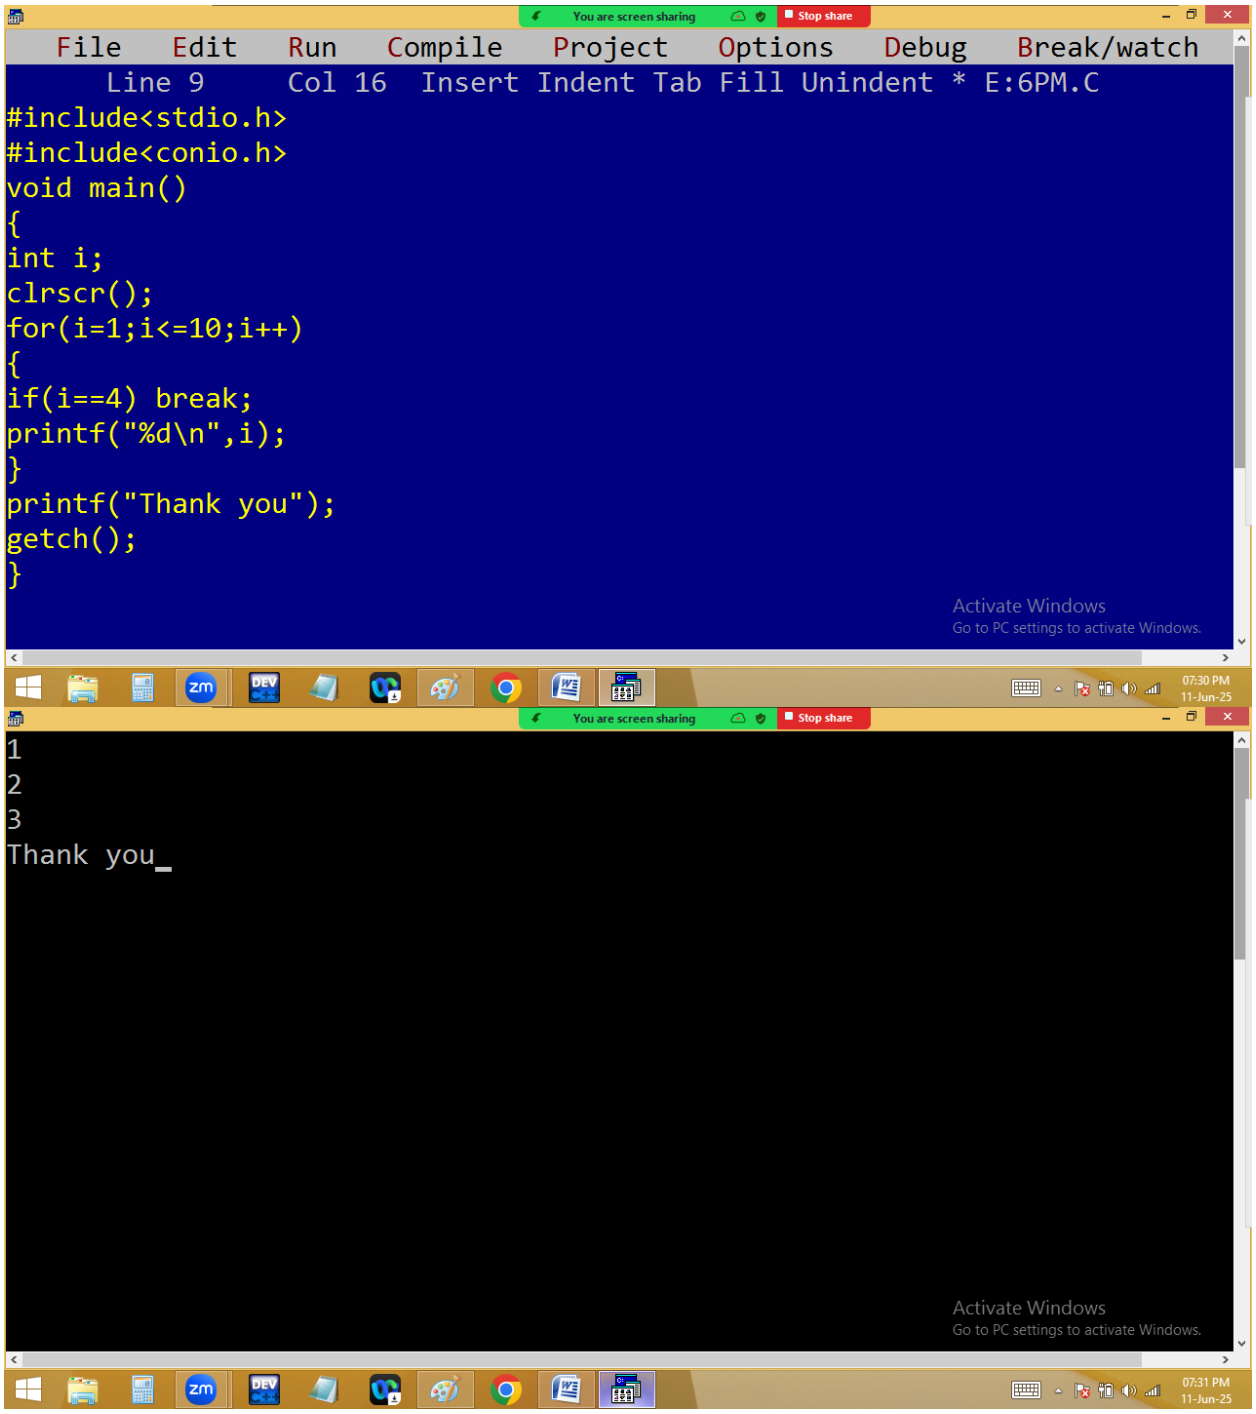
break:

It is a keyword.

break must be used with switch / loop only. When break is occurred the program execution jumped to the first line after the switch or loop.




You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 21 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
printf("%d\n",i);
}
printf("Thank you");_
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:29 PM
11-Jun-25
You are screen sharing
Stop share
1
2
3
4
5
6
7
8
9
10
Thank you
Activate Windows
Go to PC settings to activate Windows.
07:29 PM
11-Jun-25



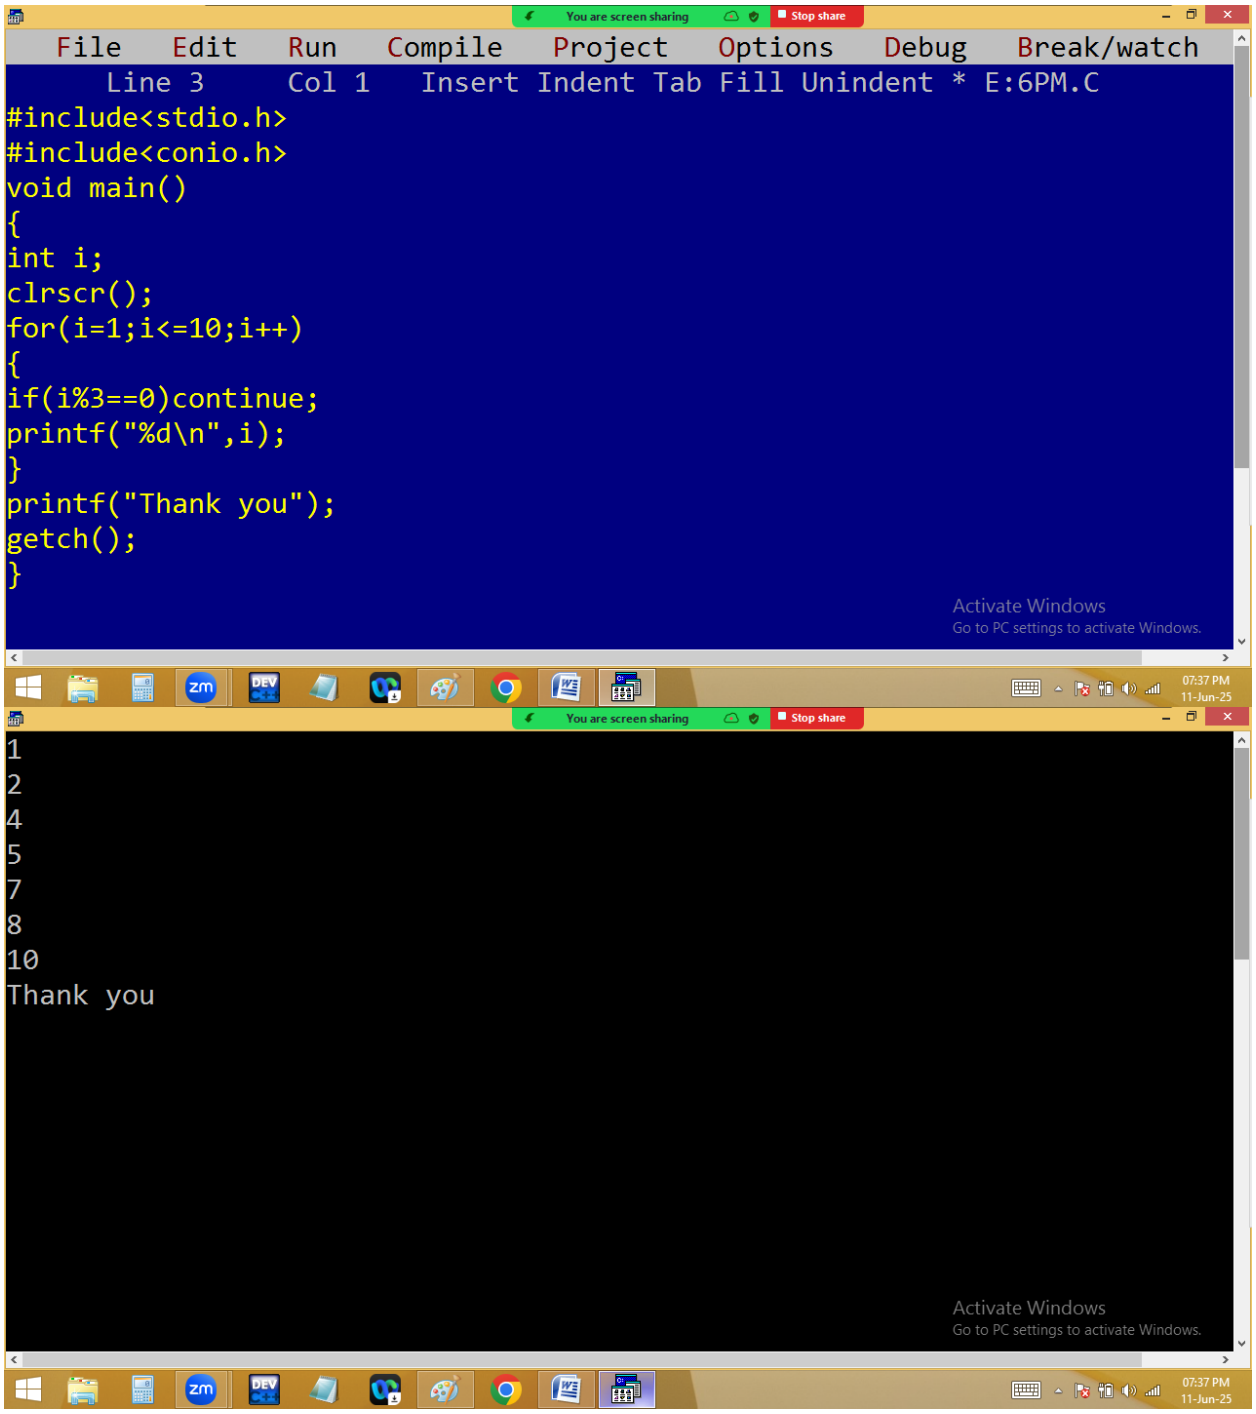
continue:

it is a keyword.

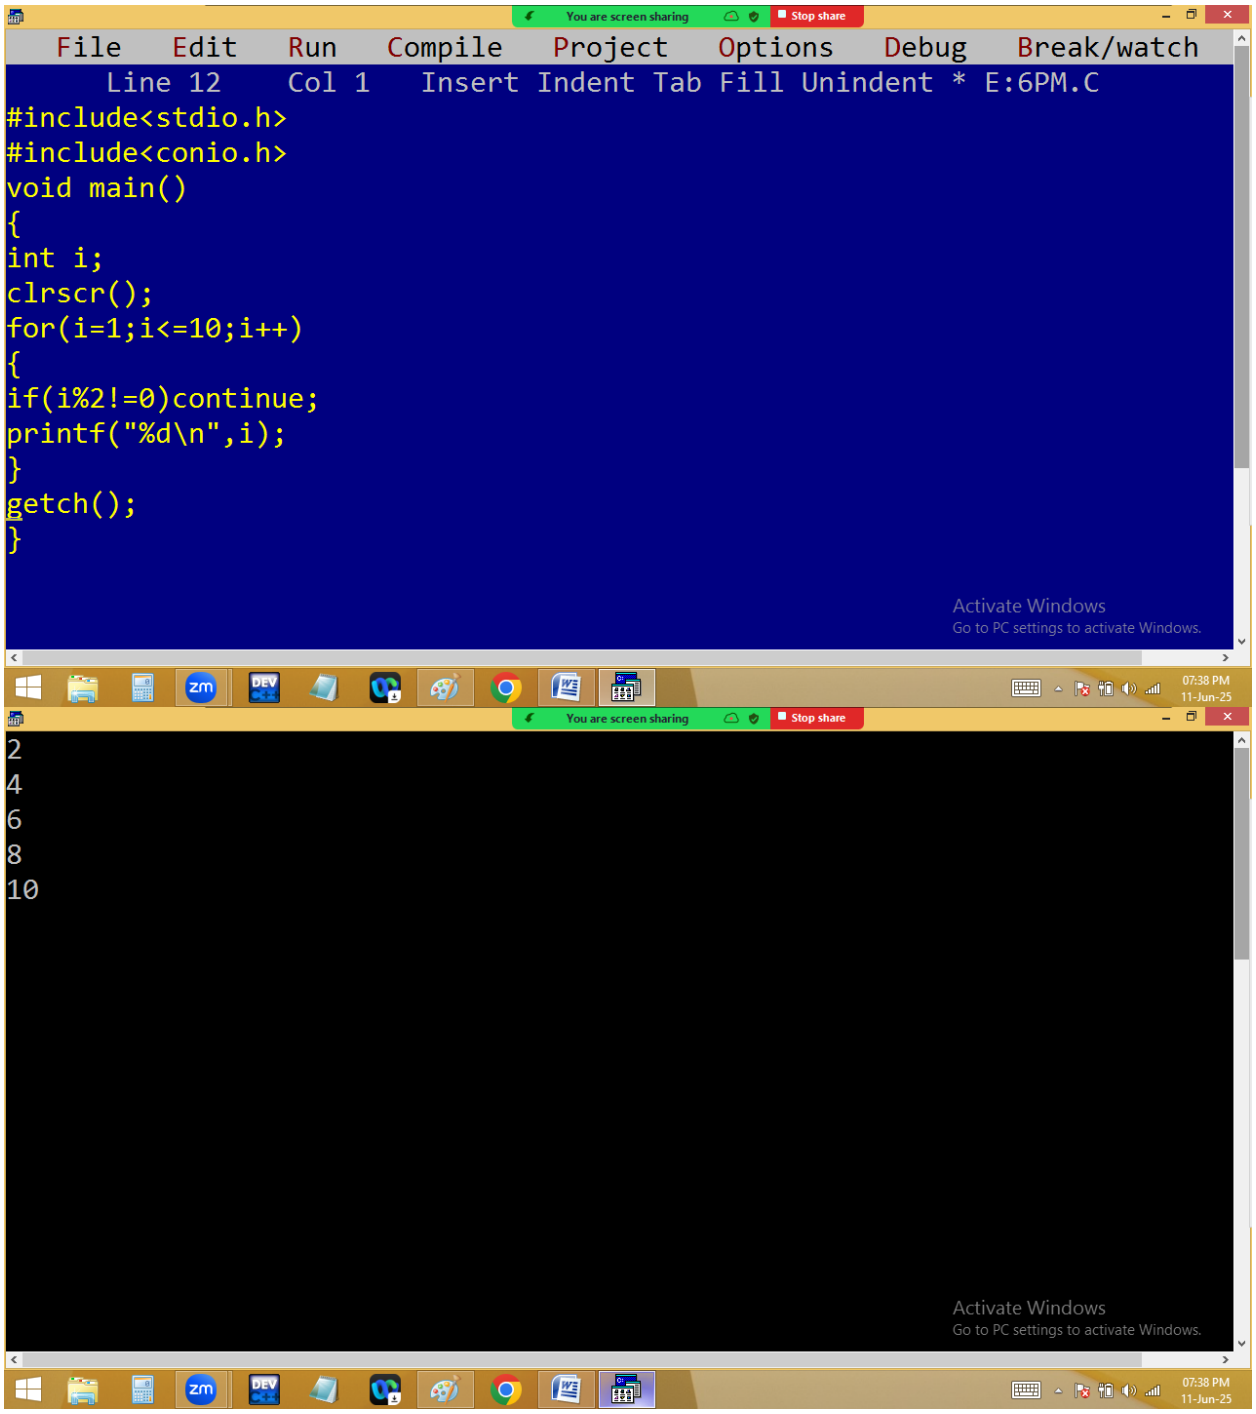
It must be used with loop.

When continue is occurred, the program execution jumped to loop ending and later to the beginning. Due to the remaining statements in loop are skipped.

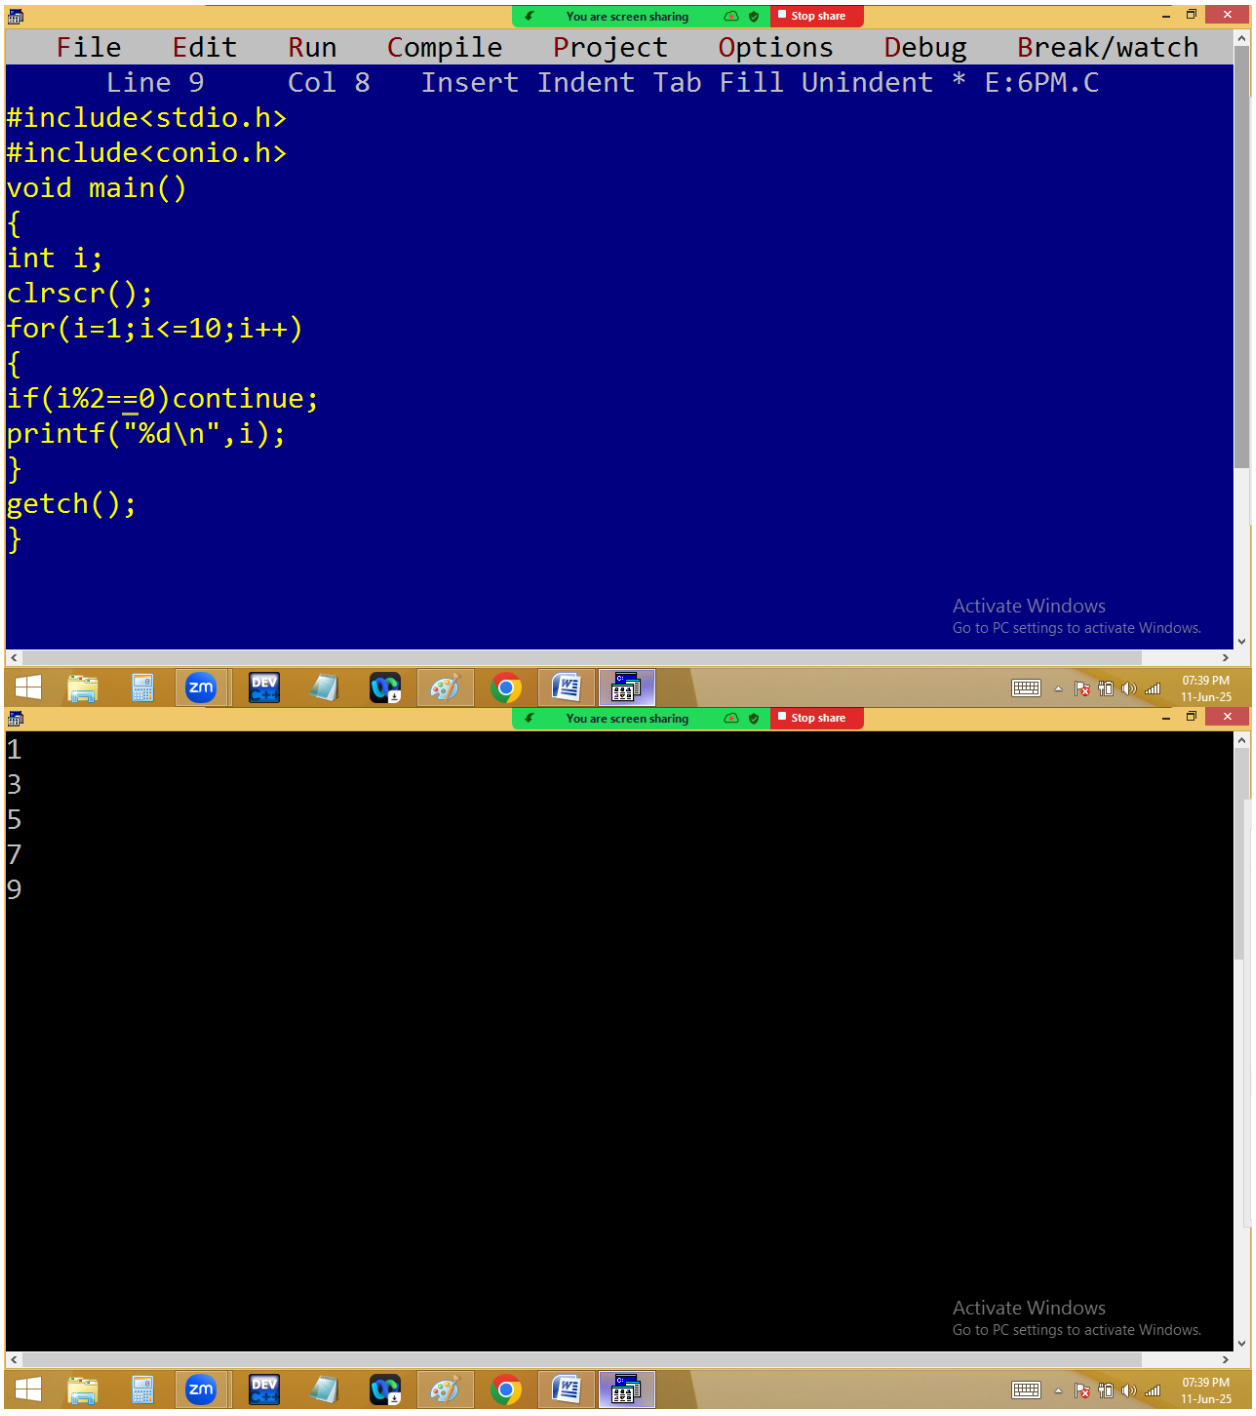
Eg: printing 1..10 no's except 3 factors.



Write a program to print 1..10 even no's using continue


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 12 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i%2!=0)continue;
printf("%d\n",i);
}
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:38 PM
11-Jun-25
You are screen sharing
Stop share
2
4
6
8
10
Activate Windows
Go to PC settings to activate Windows.
07:38 PM
11-Jun-25

Only odd no's?


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 8 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i%2==0)continue;
printf("%d\n",i);
}
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:39 PM
11-Jun-25
You are screen sharing
Stop share
1
3
5
7
9
Activate Windows
Go to PC settings to activate Windows.
07:39 PM
11-Jun-25