




Read n elements into array and find the elements sum and avg?


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],n, i,s=0;
clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++){scanf("%d",&a[i]);s+=a[i];}
printf("Elements sum=%d, avg=%d",s,s/n);
getch();
}
06:15 PM
13-Jun-25


You are screen sharing
Stop share
Enter array size 1-100 4
Enter 4 integers 1 2 3 4
Elements sum=10, avg=2
06:15 PM
13-Jun-25



You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 27 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
float a[100],s=0; int i, n;
clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++){scanf("%f",&a[i]);s+=a[i];}
printf("Elements sum=%.2f, avg=%.2f",s,s/n);
getch();
}
06:16 PM
13-Jun-25


You are screen sharing
Stop share
Enter array size 1-100 4
Enter 4 integers 1 2 3 4
Elements sum=10.00, avg=2.50
06:16 PM
13-Jun-25

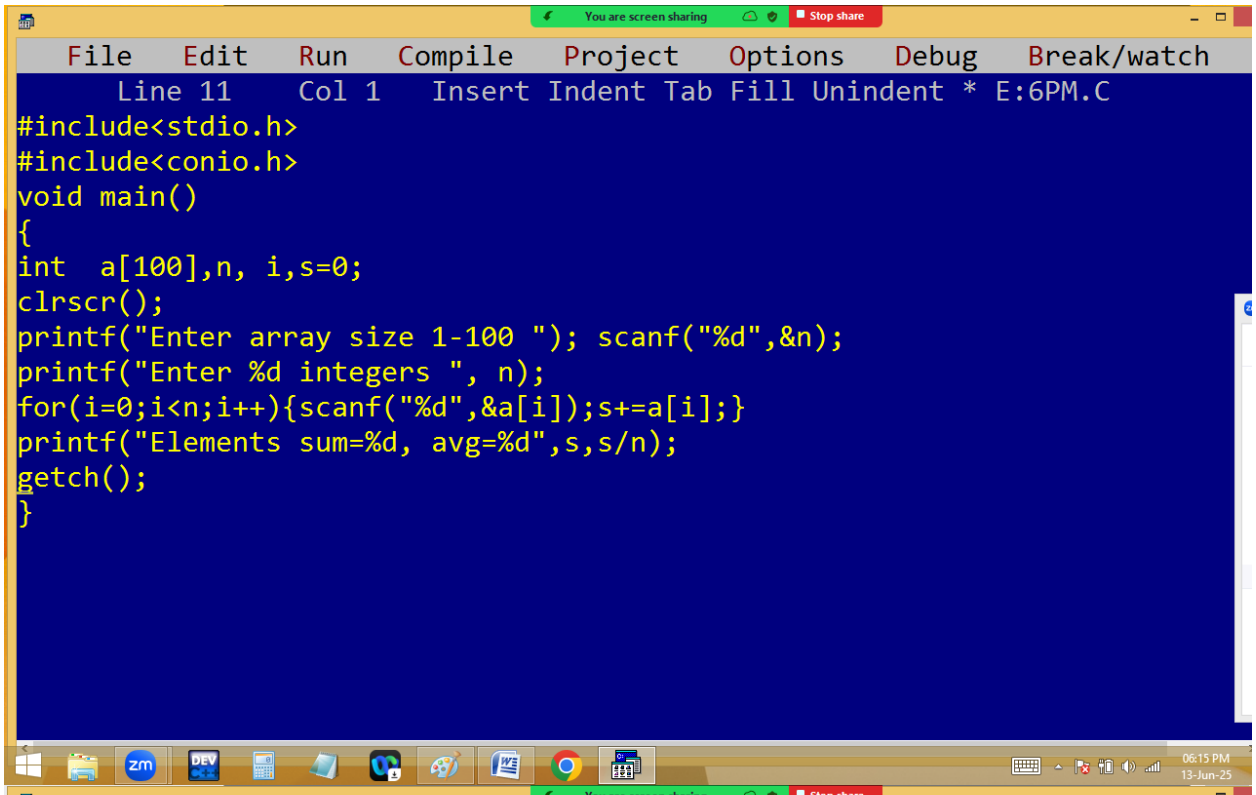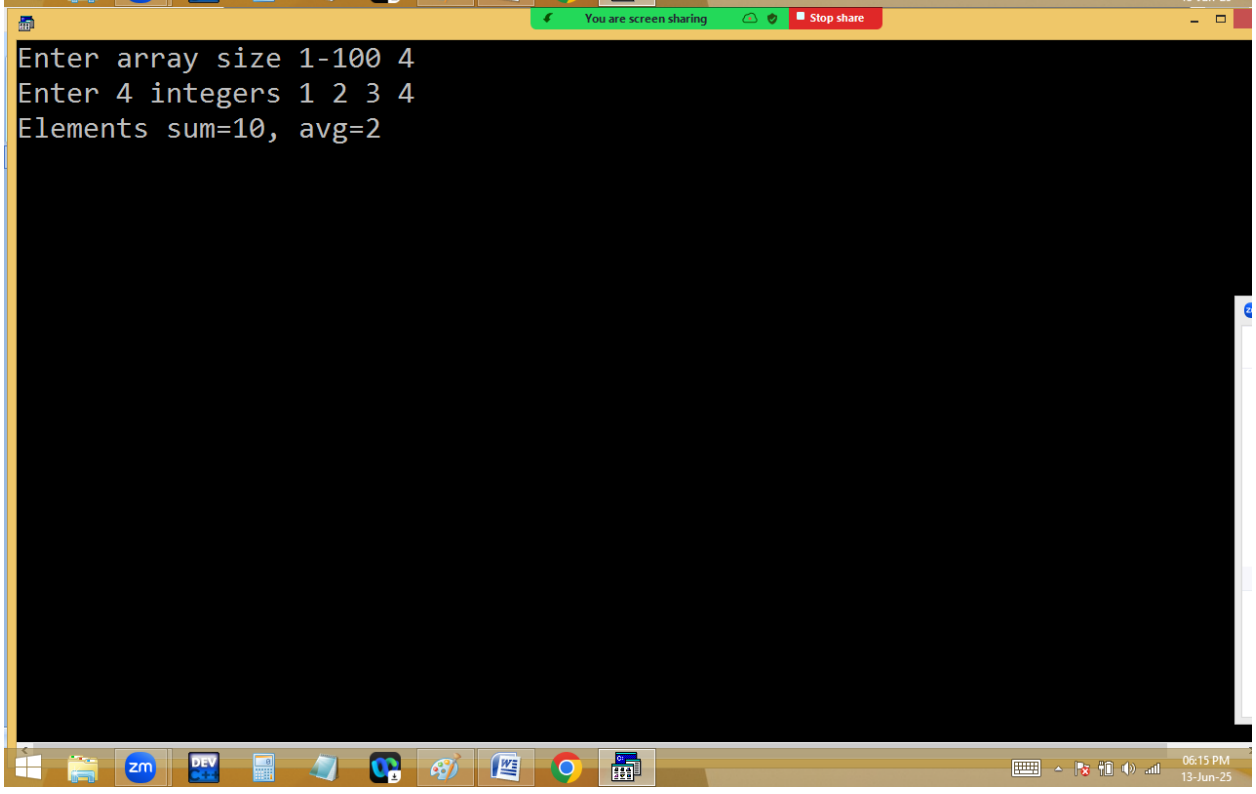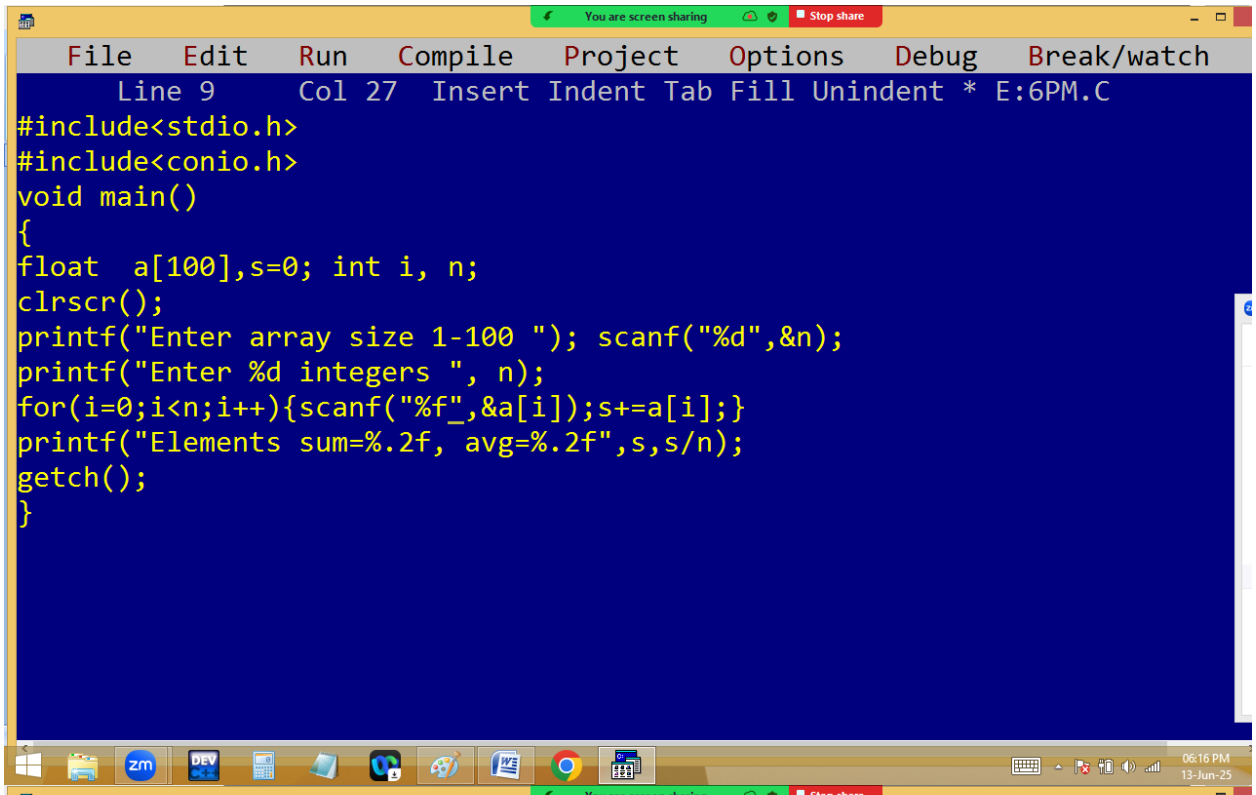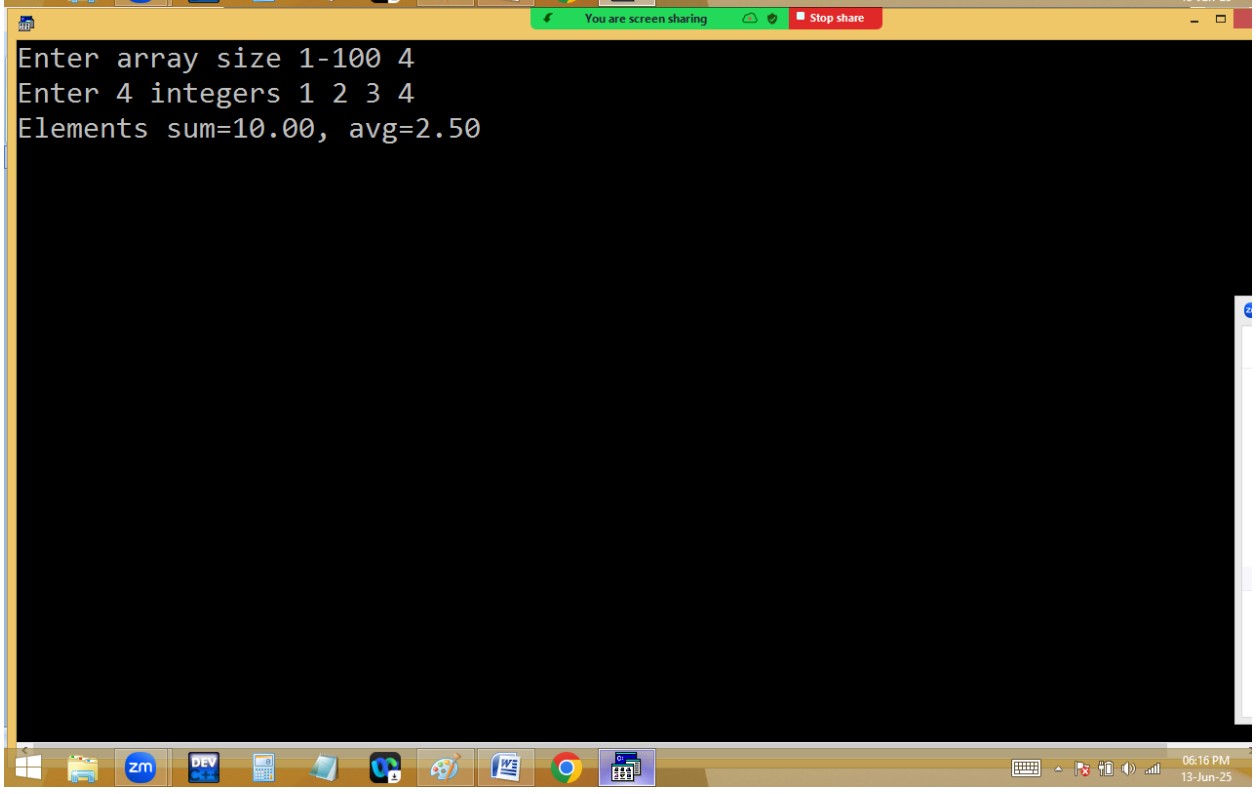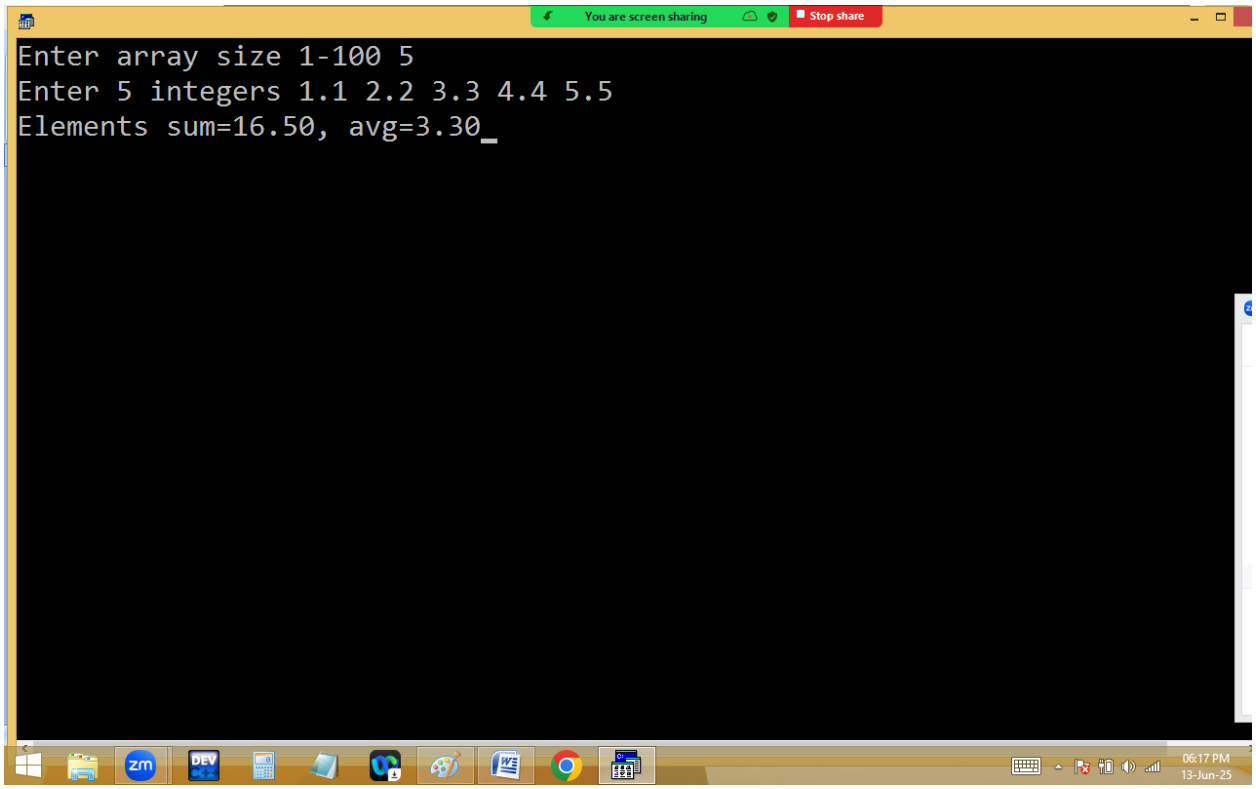




```
float  a[100],s=0;

 for( i=0; i<4;i++ )
 {
 scanf("%f",&a[i]);
 s+=a[i];
 }
23.00      5.75
printf("Sum=%.2f, Avg=%.2f",s, s/n);
```

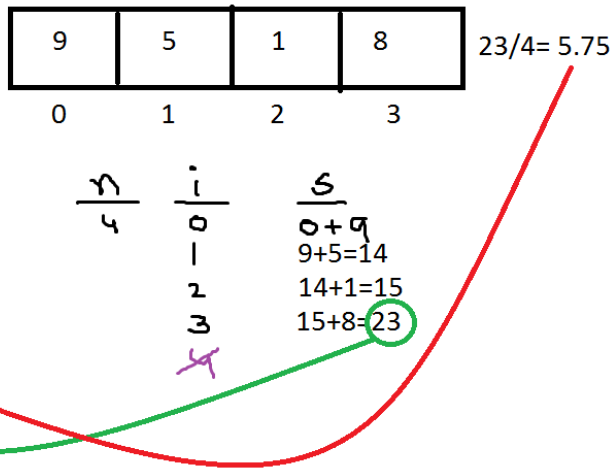

Read n elements into array and find the max, min array elements of unsorted array?

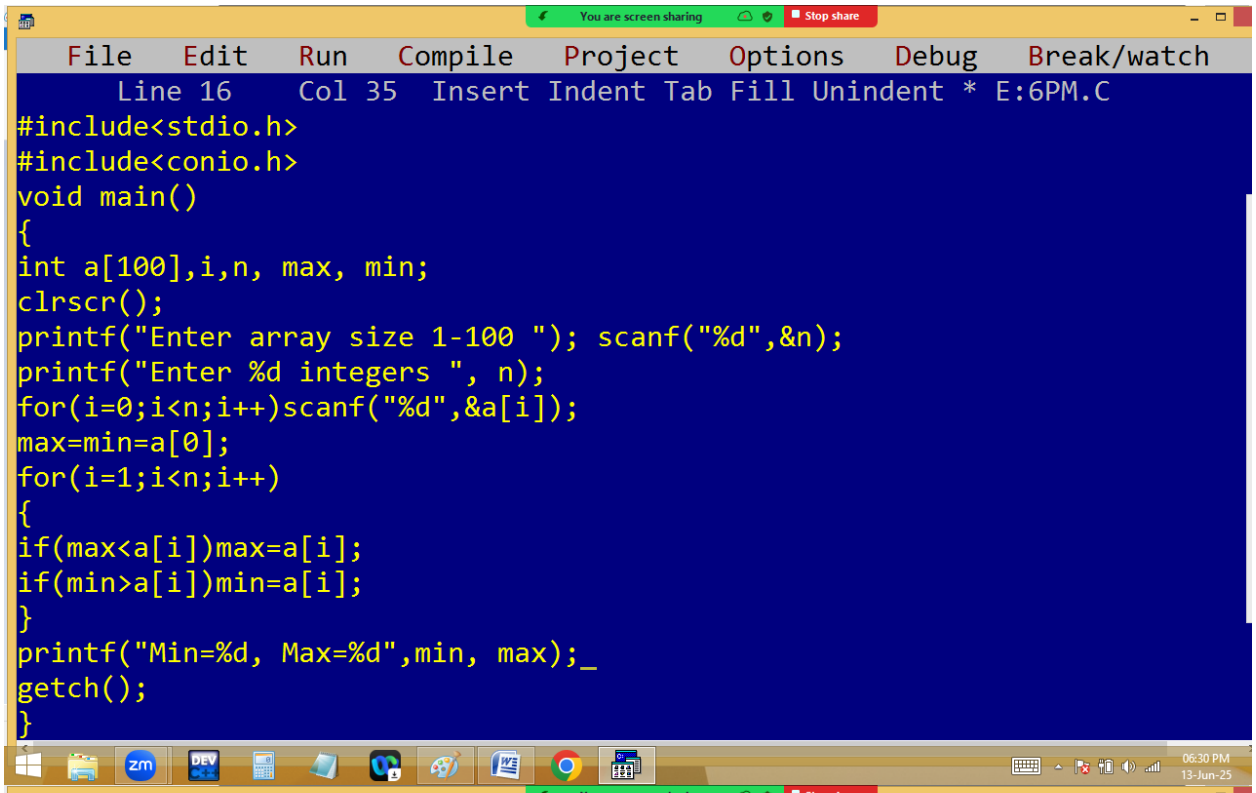

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 16 Col 35 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],i,n, max, min;
clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
max=min=a[0];
for(i=1;i<n;i++)
{
if(max<a[i])max=a[i];
if(min>a[i])min=a[i];
}
printf("Min=%d, Max=%d",min, max);
getch();
}

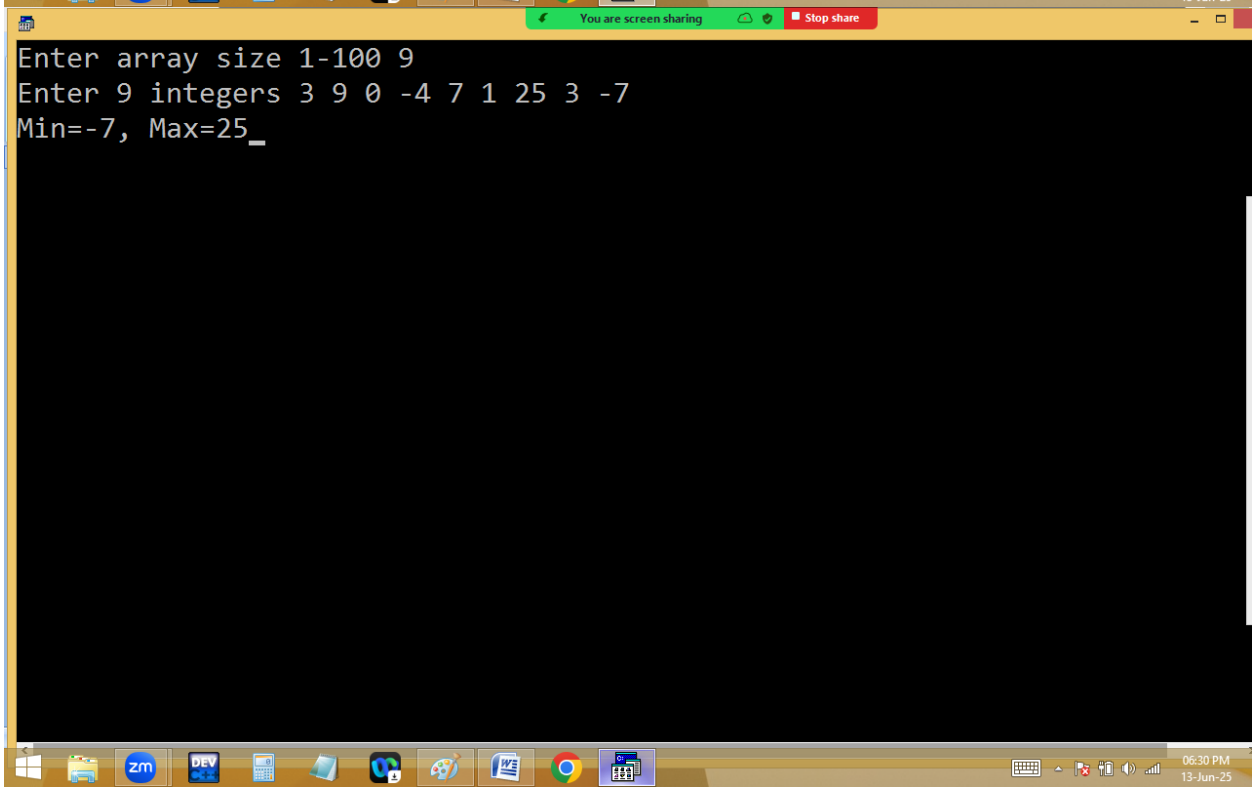

You are screen sharing
Stop share
Enter array size 1-100 9
Enter 9 integers 3 9 0 -4 7 1 25 3 -7
Min=-7, Max=25

```
max=min=a[0];

for(i=1; i<4;i++)
{
if( max<a[i]) max= a[i];
if( min>a[i]) min=a[i];
}
p(max);


p(min);
```




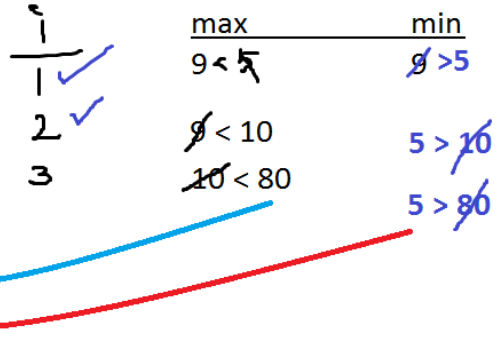



Read n elements into array and find the given element position in that array?

Linear search:

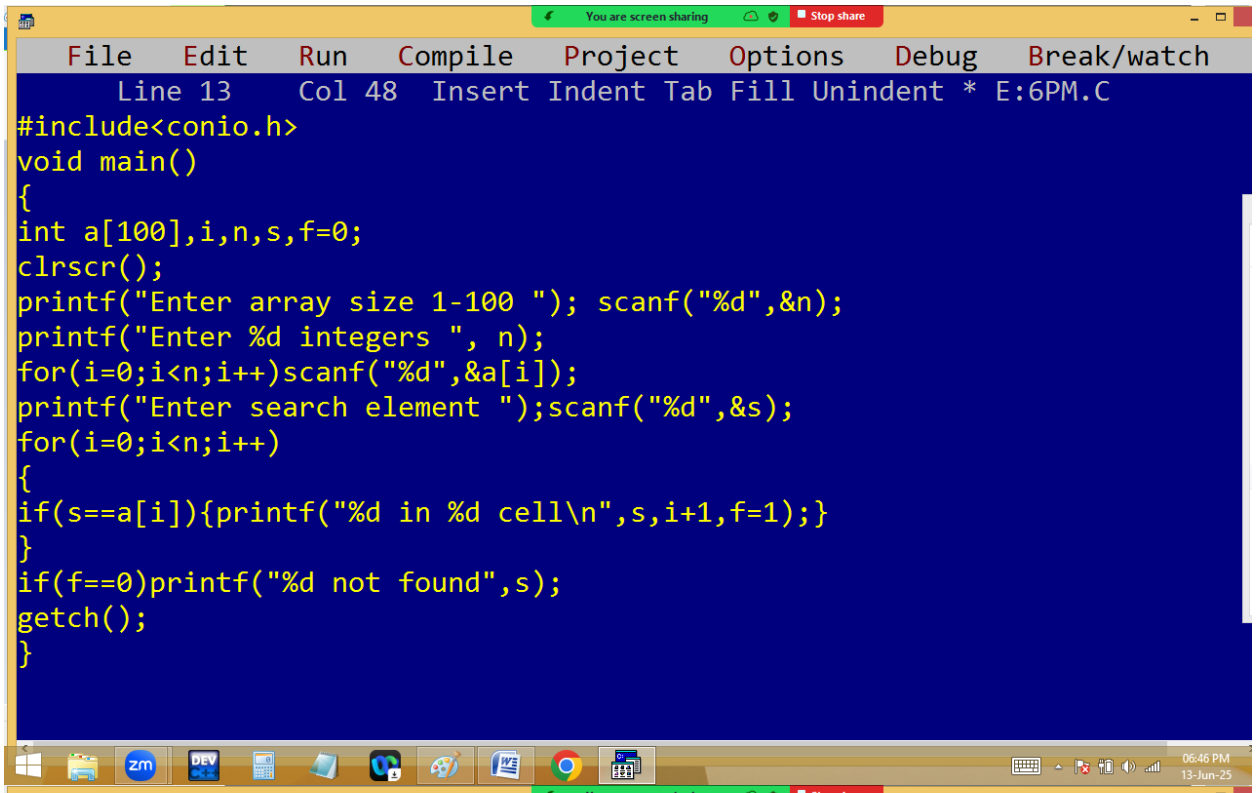
You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 48 Insert Indent Tab Fill Unindent * E:6PM.C
#include<conio.h>
void main()
{
int a[100],i,n,s,f=0;
clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
printf("Enter search element ");scanf("%d",&s);
for(i=0;i<n;i++)
{
if(s==a[i]){printf("%d in %d cell\n",s,i+1,f=1);}
}
if(f==0)printf("%d not found",s);
getch();
}
06:46 PM
13-Jun-25

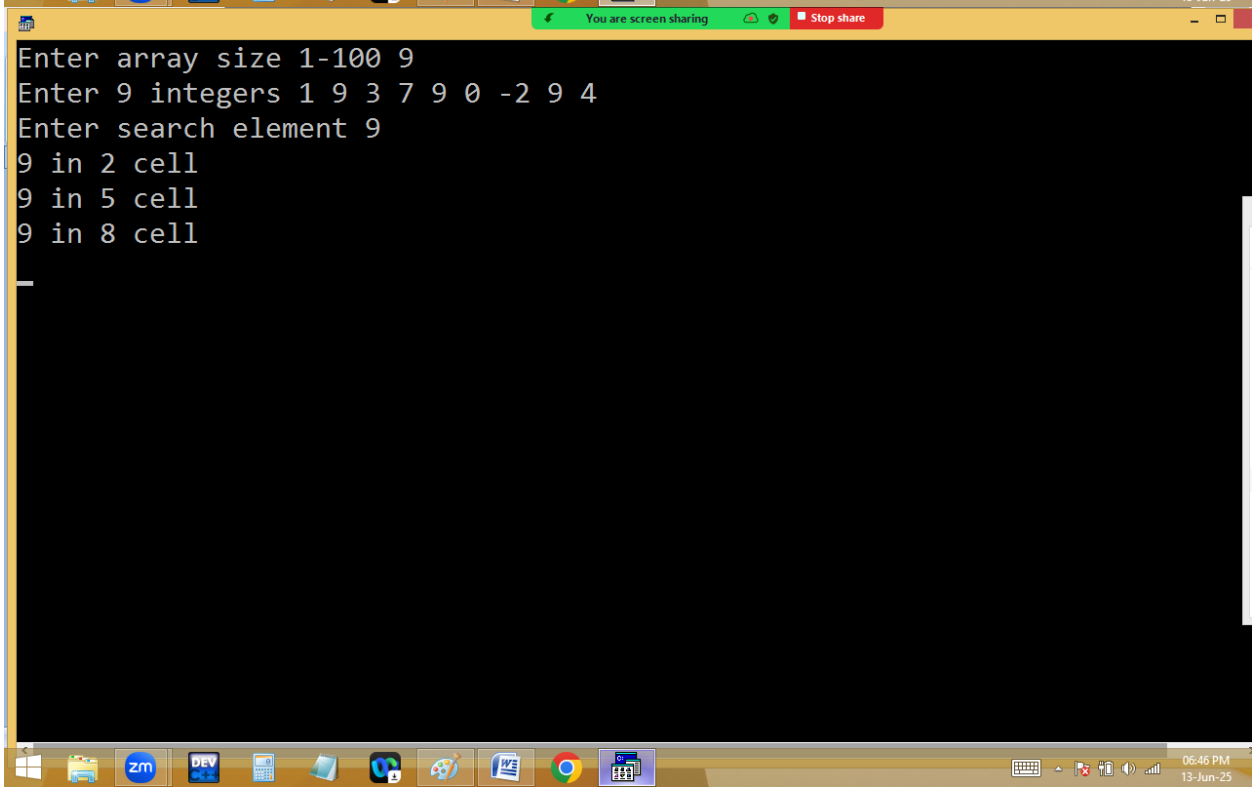
You are screen sharing
Stop share
Enter array size 1-100 9
Enter 9 integers 1 9 3 7 9 0 -2 9 4
Enter search element 9
9 in 2 cell
9 in 5 cell
9 in 8 cell
06:46 PM
13-Jun-25

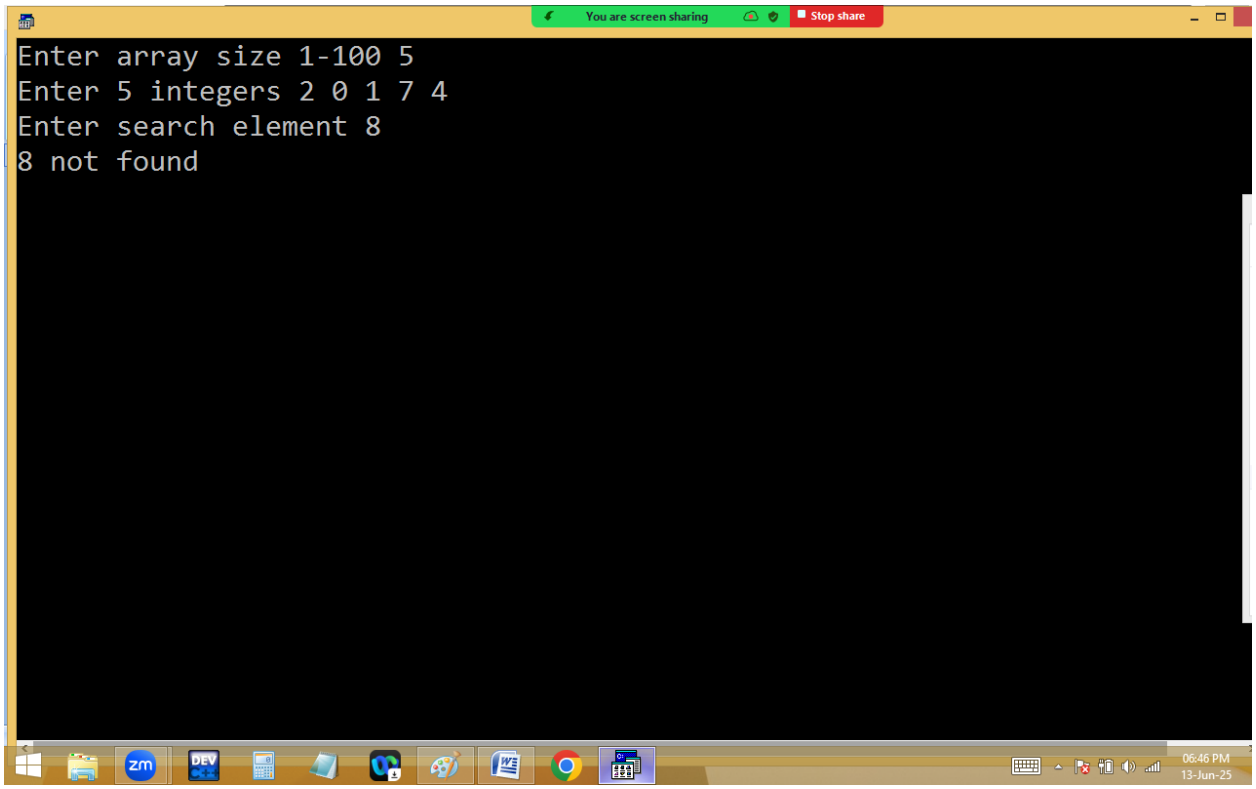



n
4

i
0
1
2

s
10
20


f
0
1

```
for( i=0; i<4; i++)
{
if( a[i]==s )


{
p("%d in %d cell\n",s,i+1,f=1);
}
}

if( f==0 ) p( ele not found );
```


Arranging array elements in reverse order?

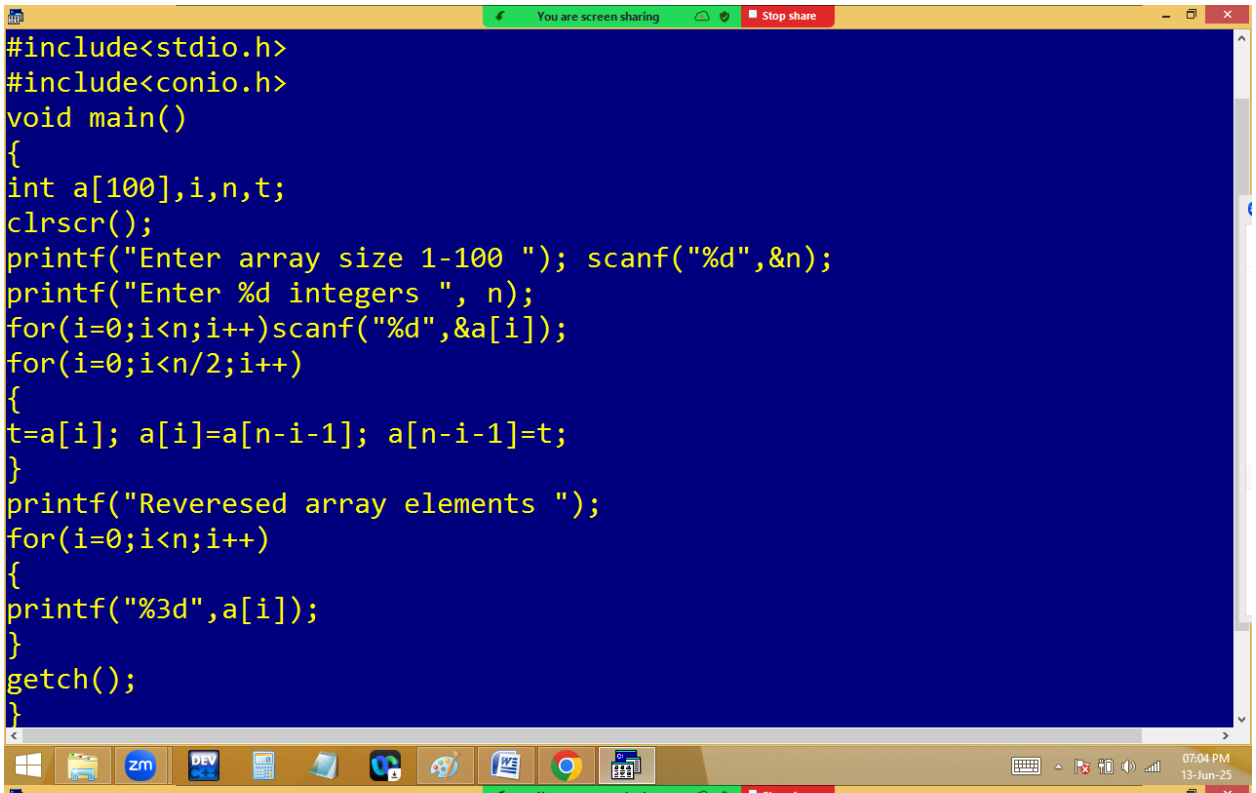


```c
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],i,n,t;
clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
for(i=0;i<n/2;i++)
{
t=a[i]; a[i]=a[n-i-1]; a[n-i-1]=t;
}
printf("Reveresed array elements ");
for(i=0;i<n;i++)
{
printf("%3d",a[i]);
}
getch();
}
```

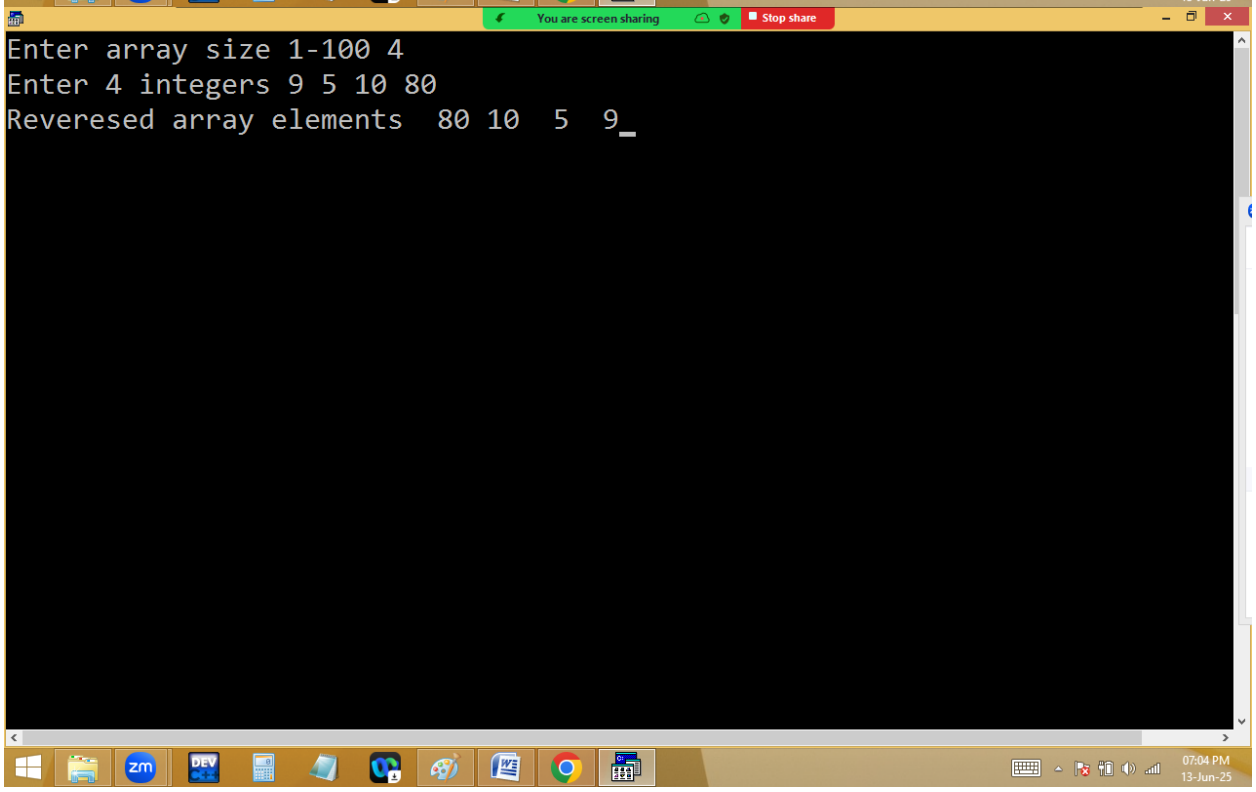

```
Enter array size 1-100 4
Enter 4 integers 9 5 10 80
Reveresed array elements  80 10  5  9
```

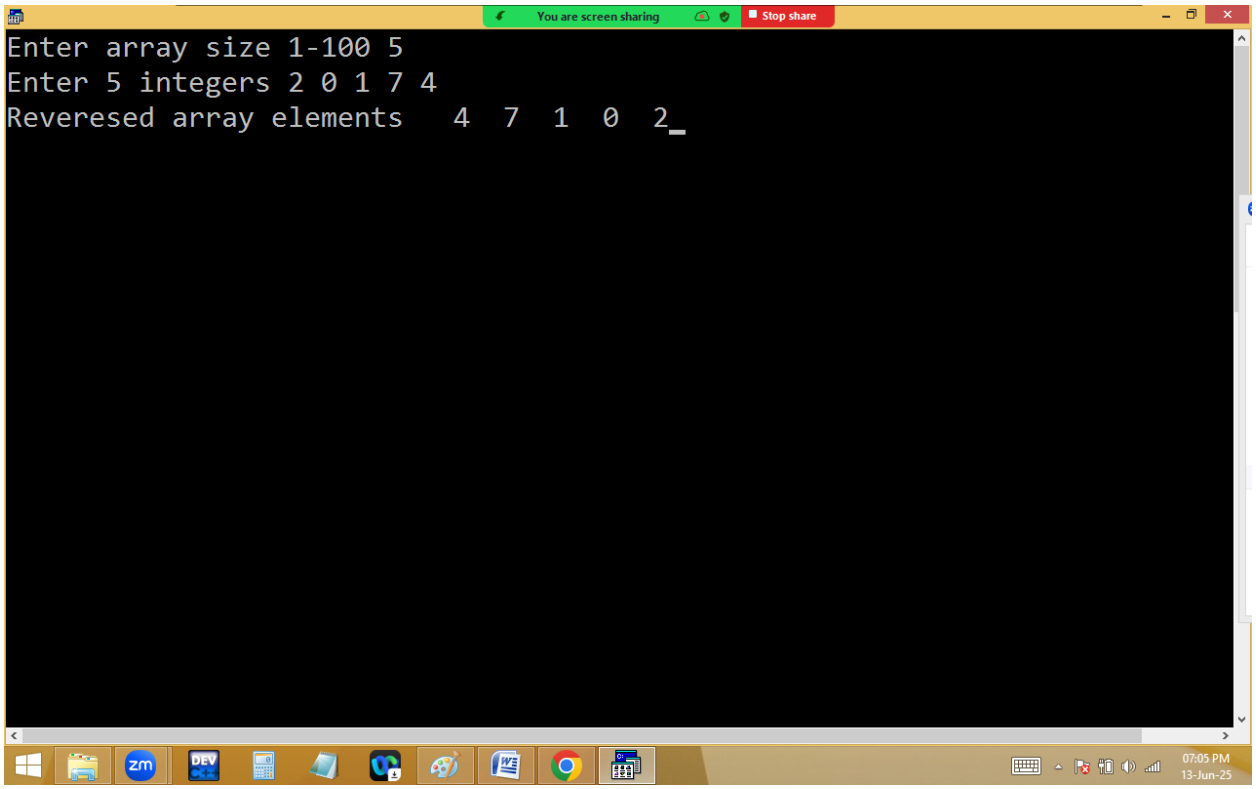



```
for(i=0;i<4/2;i++)
{
int t=a[i];
a[i]=a[4-i-1];
a[4-i-1]=t;
}
```

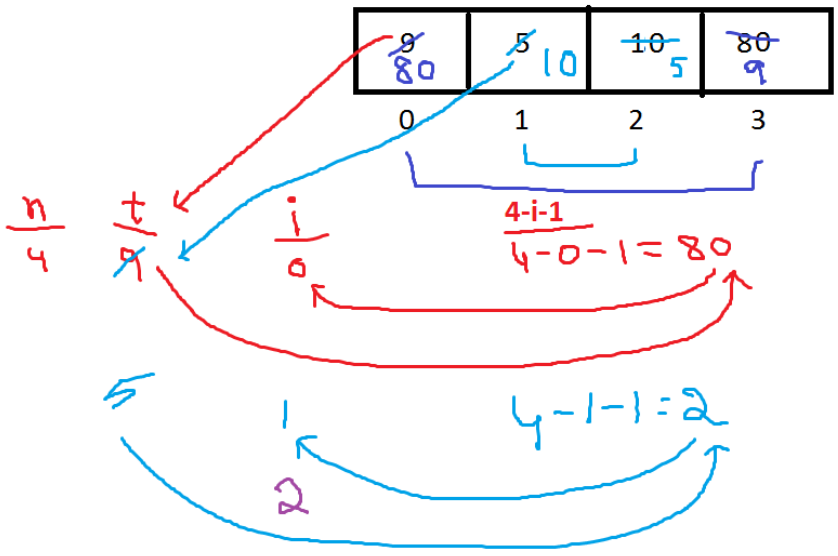


Arrange array elements in ascending order using selection sort?

shopping mall





0 1 2 3

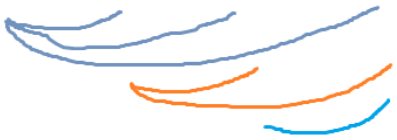

9	5	7	3
5	9	7	3
3	9	7	5
3	7	9	5
3	5	9	7
3	5	7	9

L	R
i	j
0	1,2,3
1	2,3
2	3

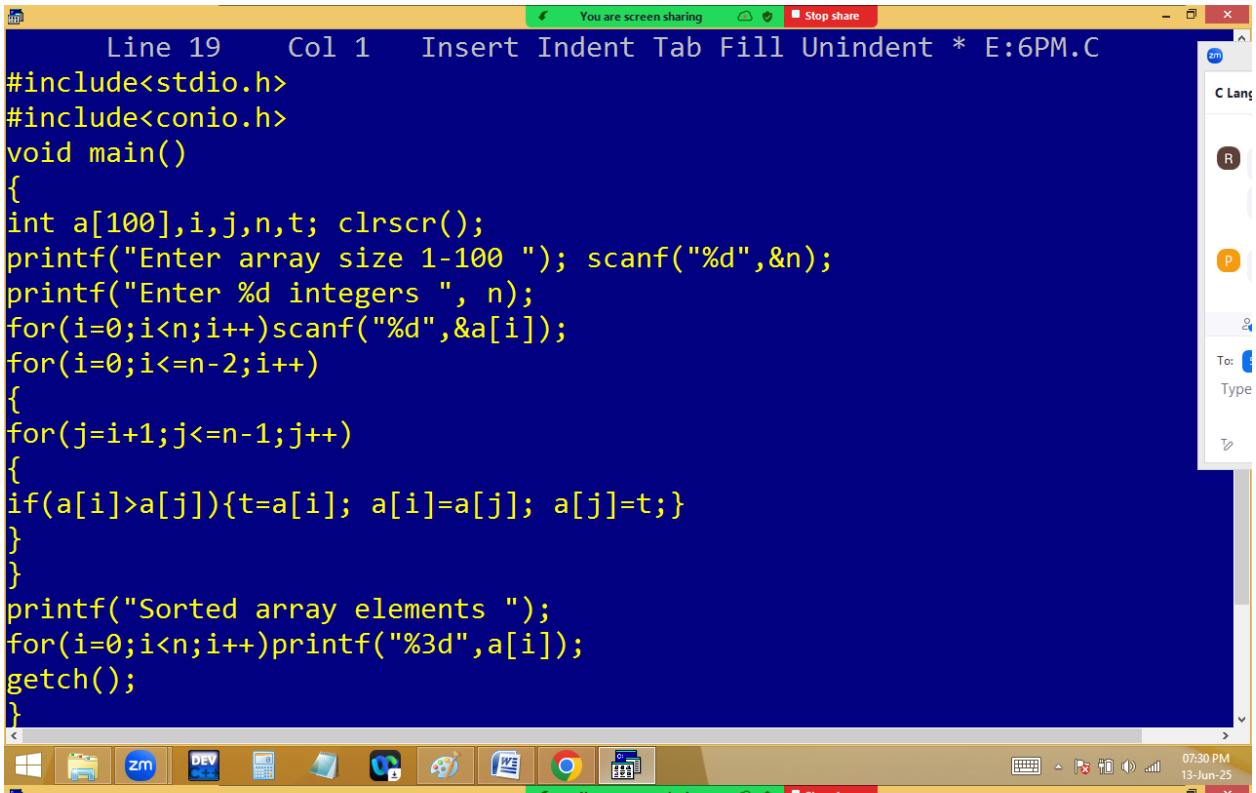
You are screen sharing
Stop share
Line 19 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],i,j,n,t; clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
for(i=0;i<=n-2;i++)
{
for(j=i+1;j<=n-1;j++)
{
if(a[i]>a[j]){t=a[i]; a[i]=a[j]; a[j]=t;}
}
}
printf("Sorted array elements ");
for(i=0;i<n;i++)printf("%3d",a[i]);
getch();
}

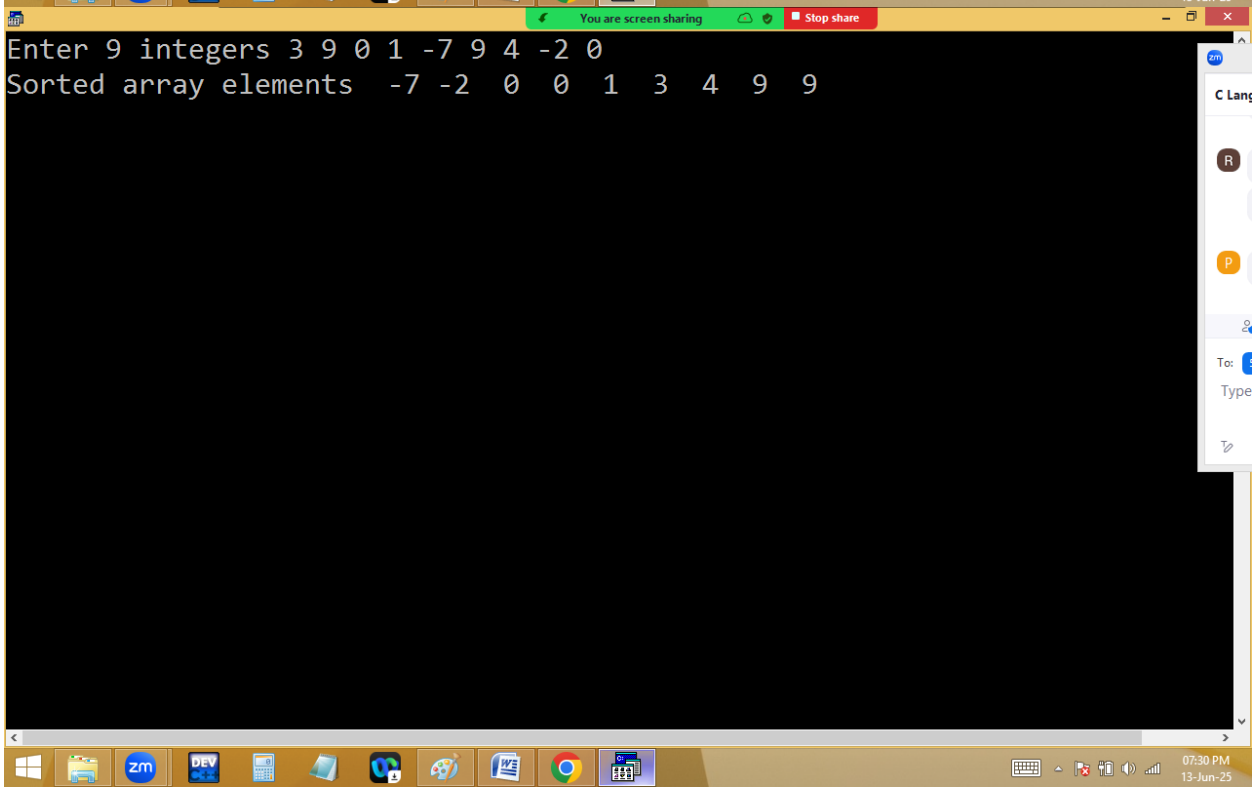
You are screen sharing
Stop share
Enter 9 integers 3 9 0 1 -7 9 4 -2 0
Sorted array elements -7 -2 0 0 1 3 4 9 9

Descending order:

```
      Line 19    Col 9    Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],i,j,n,t; clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
for(i=0;i<=n-2;i++)
{
for(j=i+1;j<=n-1;j++)
{
if(a[i]<a[j]){t=a[i]; a[i]=a[j]; a[j]=t;}
}
}
printf("Sorted array elements ");
for(i=0;i<n;i++)printf("%3d",a[i]);
getch();
}
```

```
Enter 9 integers 3 1 -5 9 4 0 6 -1 6
Sorted array elements   9  6  6  4  3  1  0 -1 -5
```