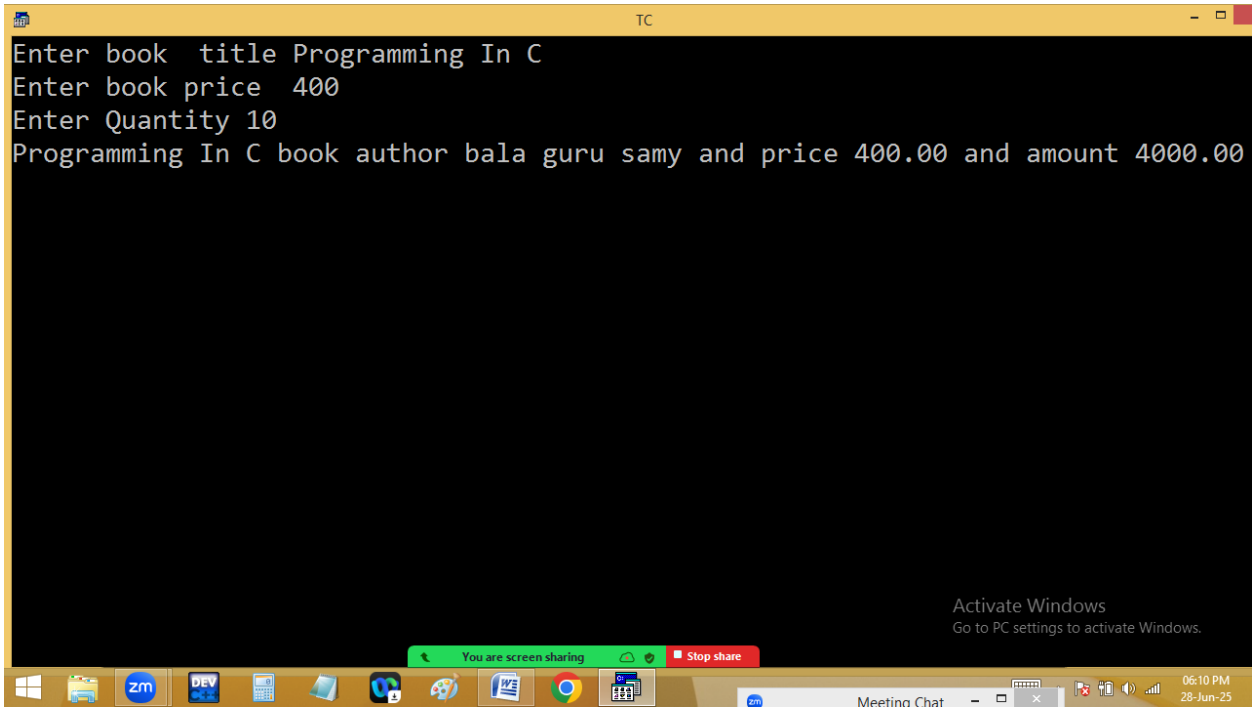
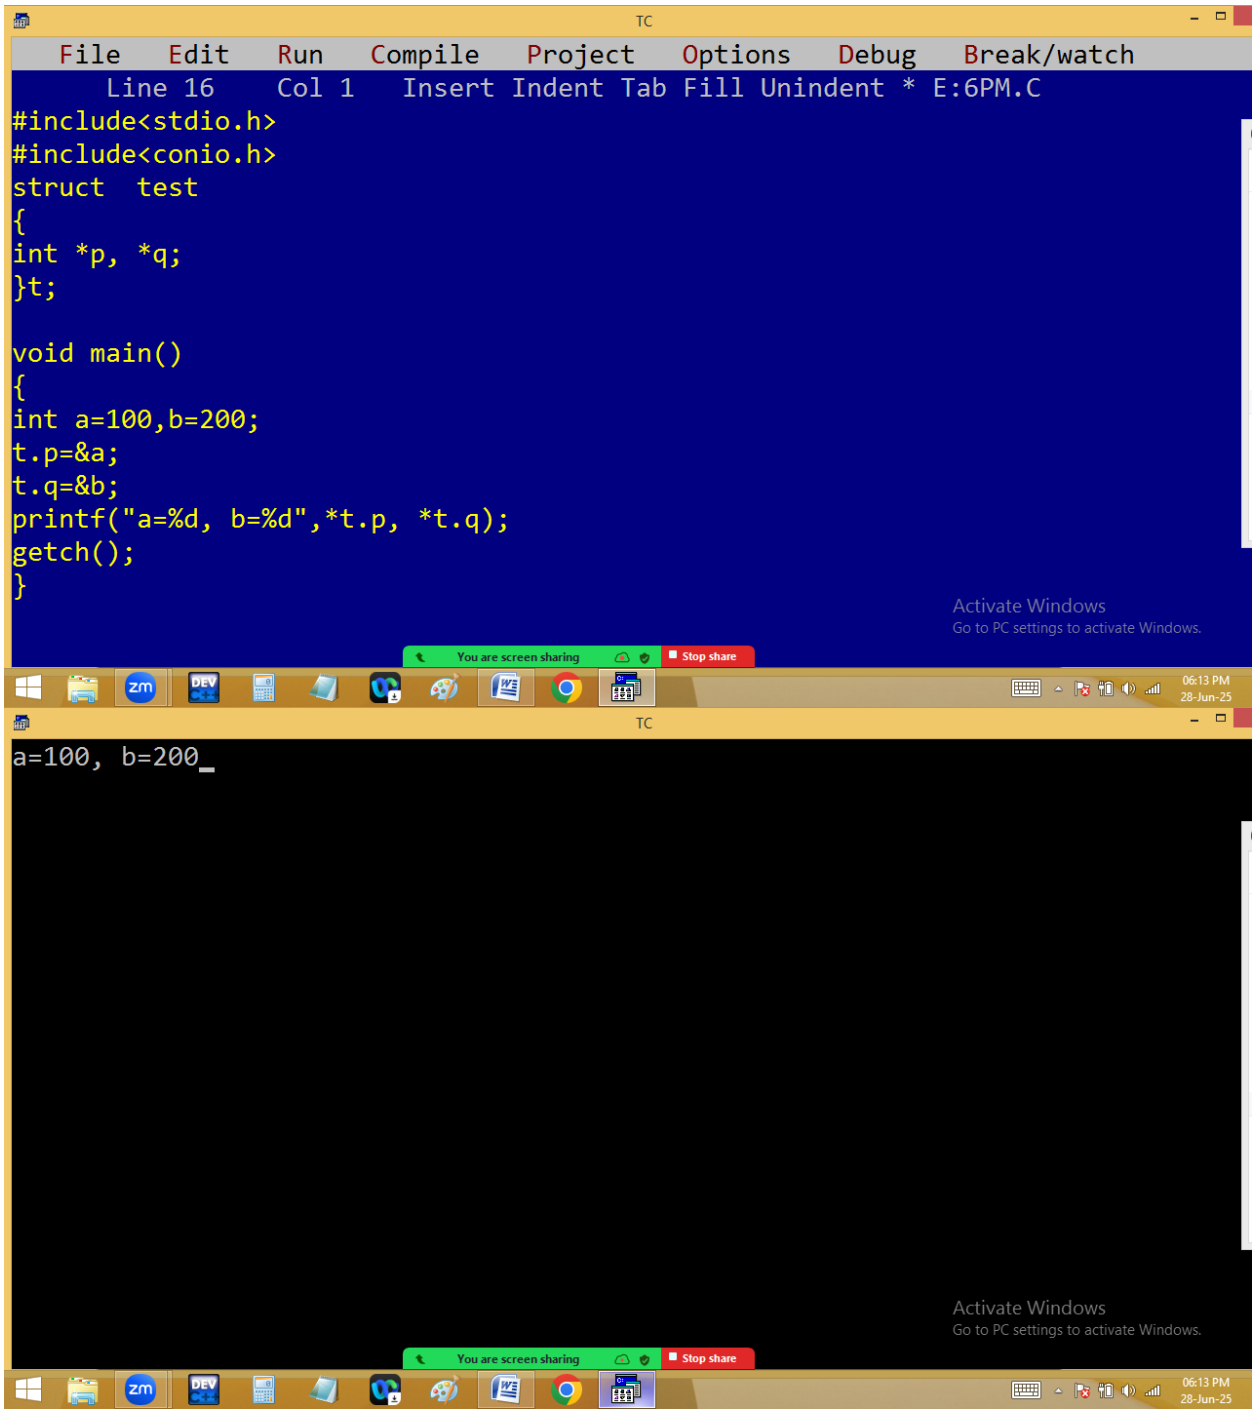
```
#include<stdio.h>
#include<conio.h>
void main()
{
struct book
{
int qty;
char  author[30], title[30];
float price,amount;
};
float tot=0;
struct book b;
clrscr();
printf("Enter author name "); gets(b.author);
printf("Enter book  title "); gets(b.title);
printf("Enter book price  "); scanf("%f",&b.price);
```

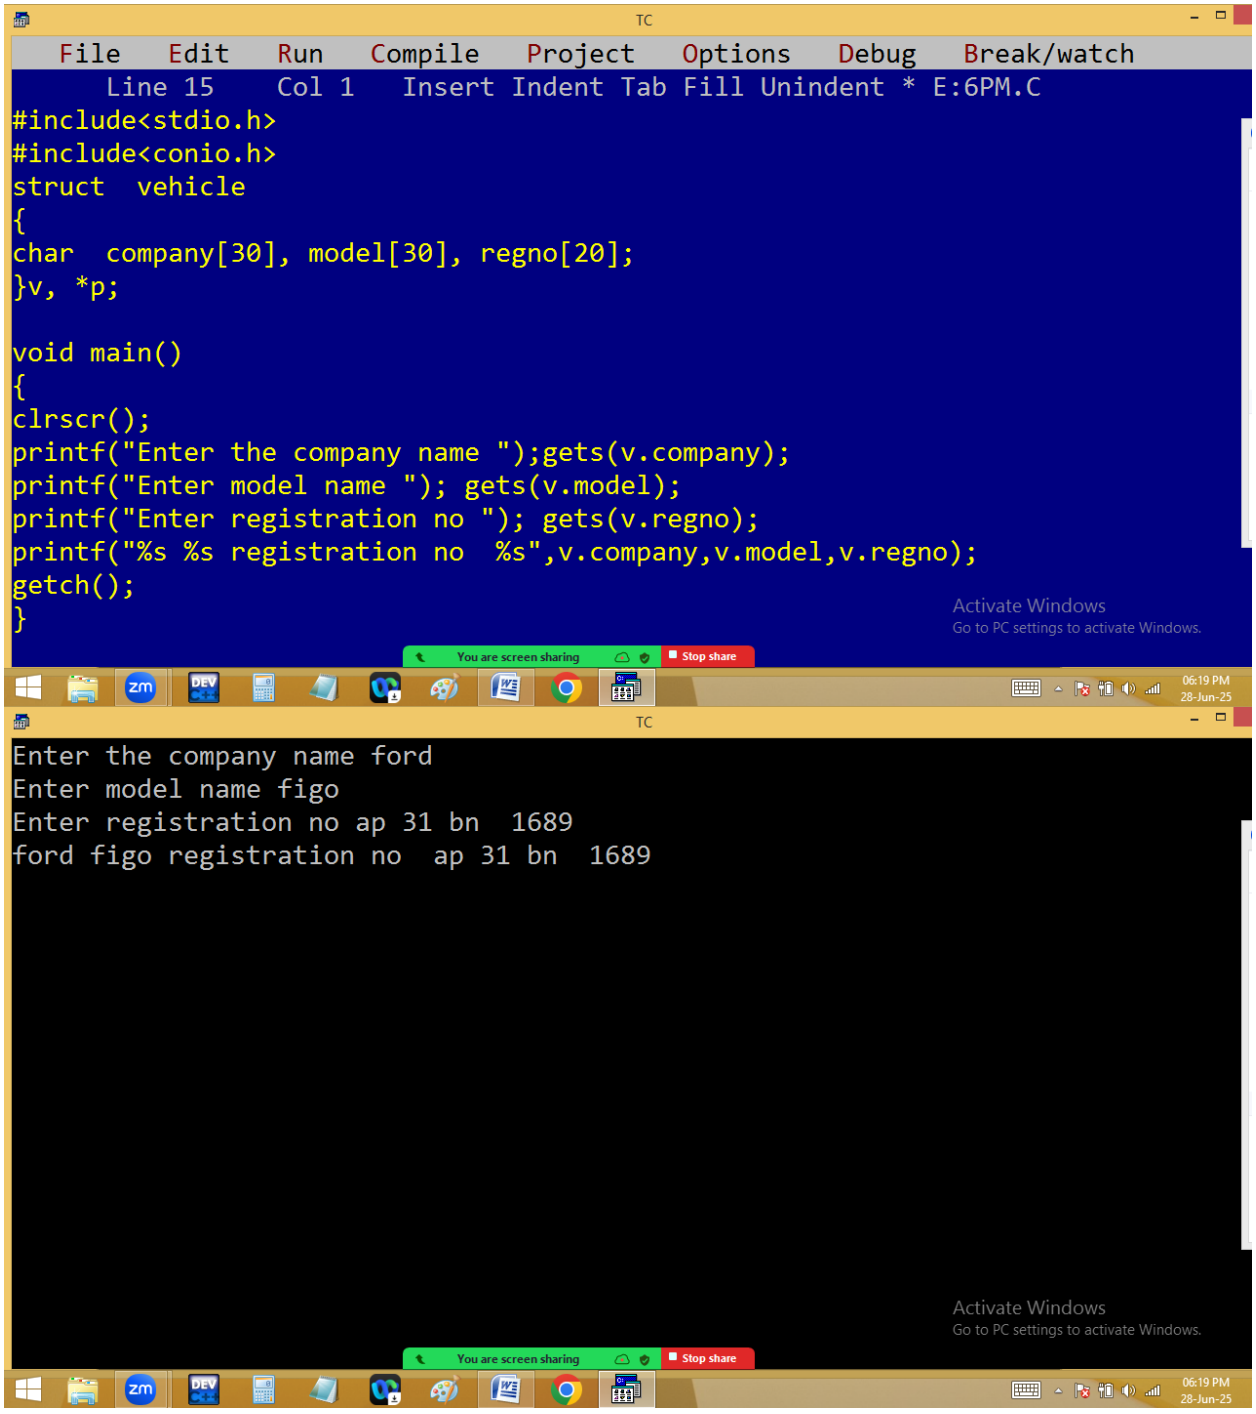
```
printf("Enter Quantity ");scanf("%d",&b.qty);
printf("%s book author %s and price %.2f and
amount %.2f",
b.title,b.author,b.price,b.qty * b.price);
getch();
}
```

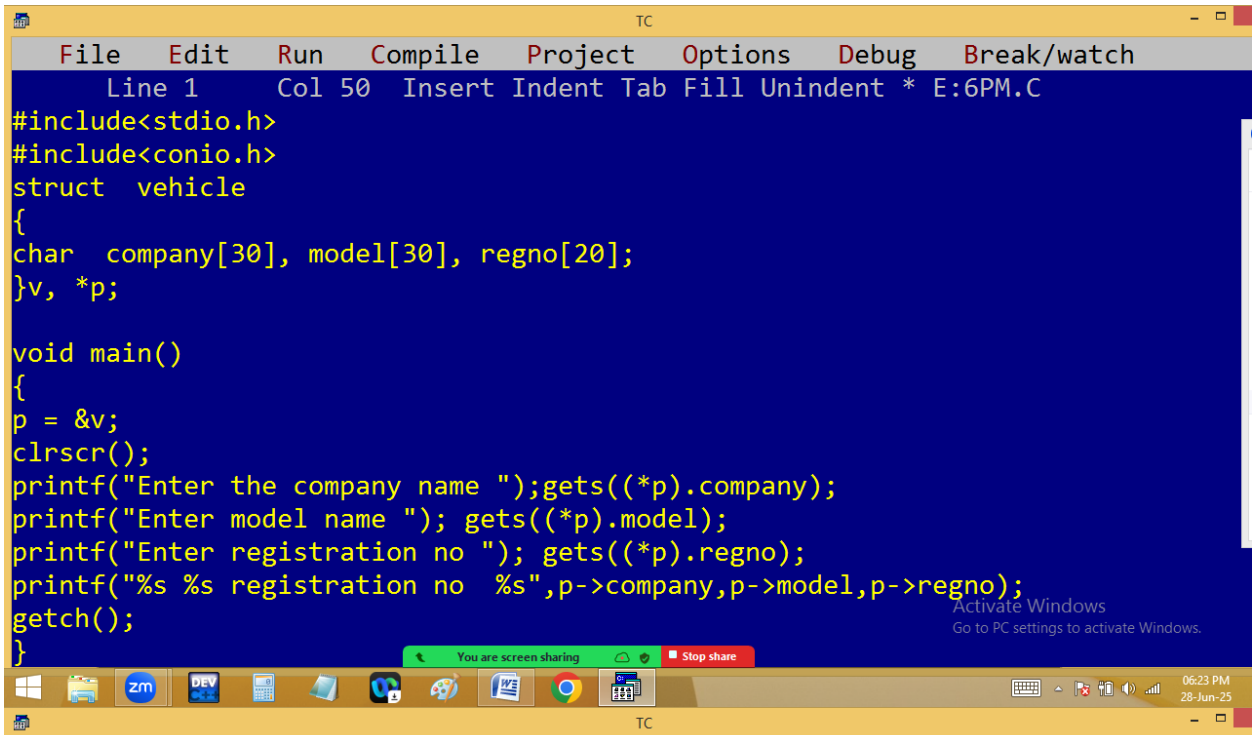


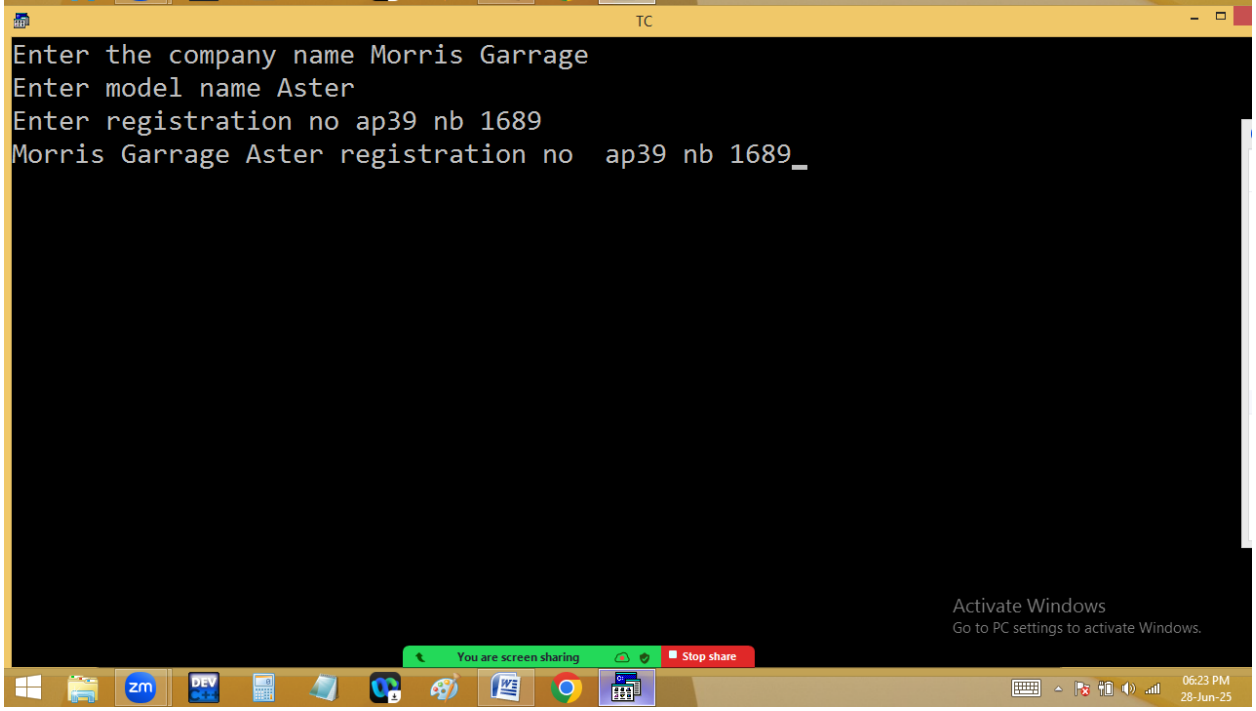
Pointer structure members:


TC
File Edit Run Compile Project Options Debug Break/watch
Line 16 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
struct test
{
int *p, *q;
}t;
void main()
{
int a=100,b=200;
t.p=&a;
t.q=&b;
printf("a=%d, b=%d",*t.p, *t.q);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
06:13 PM
28-Jun-25
TC
a=100, b=200
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
06:13 PM
28-Jun-25

Pointer structure variables:




TC
File Edit Run Compile Project Options Debug Break/watch
Line 1 Col 50 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
struct vehicle
{
char company[30], model[30], regno[20];
}v, *p;
void main()
{
p = &v;
clrscr();
printf("Enter the company name ");gets((*p).company);
printf("Enter model name "); gets((*p).model);
printf("Enter registration no "); gets((*p).regno);
printf("%s %s registration no %s",p->company,p->model,p->regno);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
06:23 PM
28-Jun-25


TC
Enter the company name Morris Garrage
Enter model name Aster
Enter registration no ap39 nb 1689
Morris Garrage Aster registration no ap39 nb 1689
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
06:23 PM
28-Jun-25

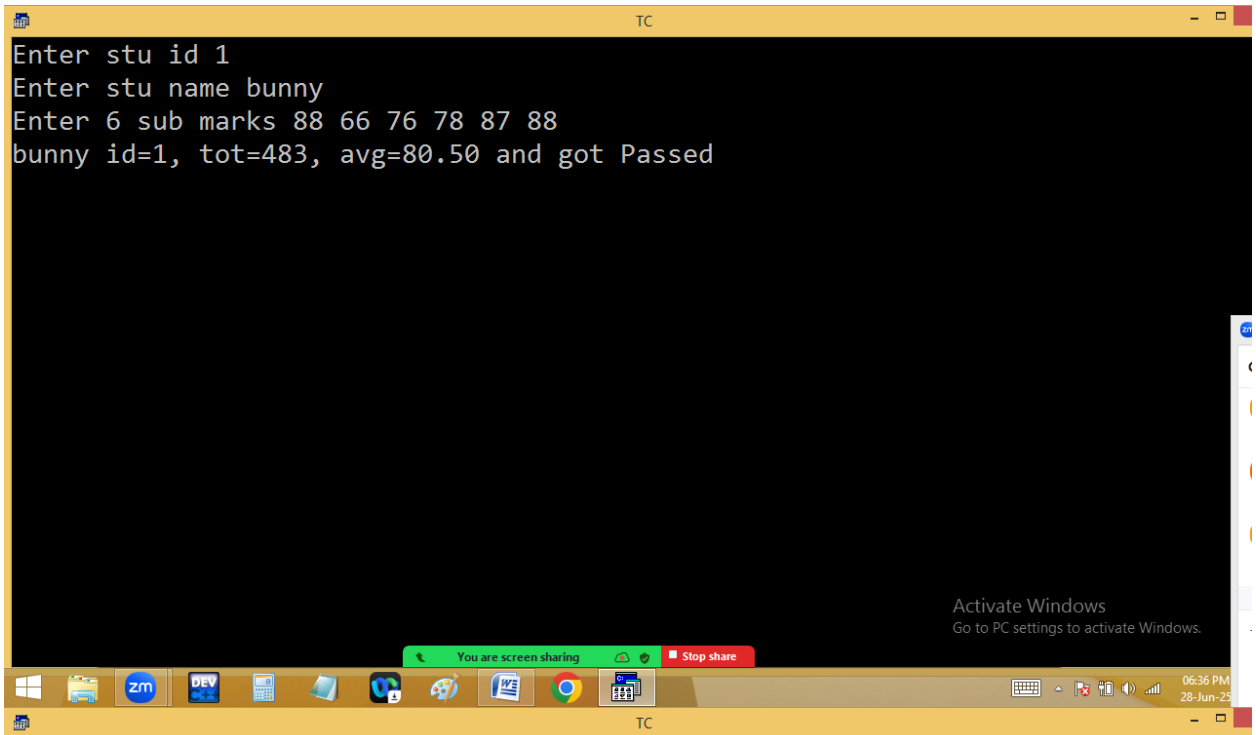
Array of structure members:

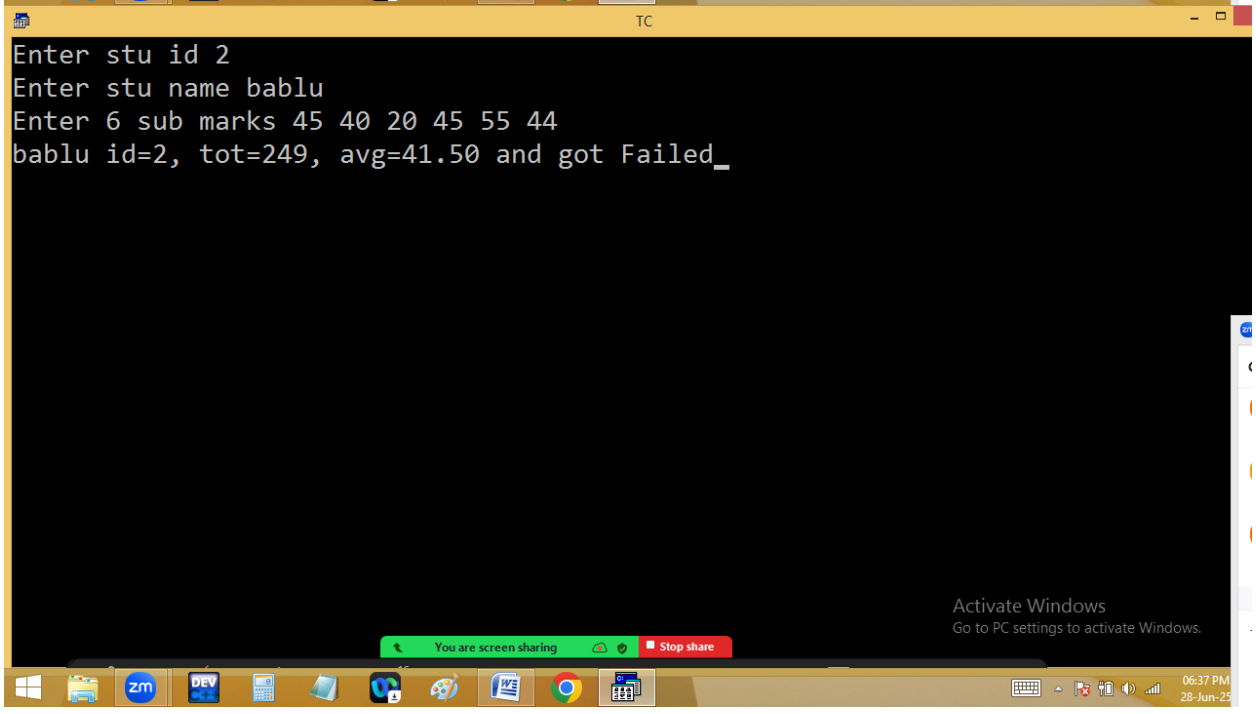
```
#include<stdio.h>
#include<conio.h>
struct  stu
{
int id, sub[6]; /* array of str member */
char name[20];
}s;

void main()
{
int i, tot=0,p=1;
float avg;
clrscr();
printf("Enter stu id ");scanf("%d",&s.id);
flushall();
```

```
printf("Enter stu name "); gets(s.name);
printf("Enter 6 sub marks ");
for(i=0;i<6;i++)
{
scanf("%d",&s.sub[i]);tot+=s.sub[i];if(s.sub[i]<35)p=0;
}avg=tot/6.0;

printf("%s id=%d, tot=%d, avg=%.2f and got %s",
s.name,s.id,tot,avg,p==1?"Passed":"Failed");
getch();
}
```


TC
Enter stu id 1
Enter stu name bunny
Enter 6 sub marks 88 66 76 78 87 88
bunny id=1, tot=483, avg=80.50 and got Passed
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
06:36 PM
28-Jun-25


TC
Enter stu id 2
Enter stu name bablu
Enter 6 sub marks 45 40 20 45 55 44
bablu id=2, tot=249, avg=41.50 and got Failed
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
06:37 PM
28-Jun-25

Array of structure:

D-MART SANATH NAGAR			
ITEMS	QTY	PRICE	AMOUNT
RICE BAG	1	1750	1750
FORTUNE	5	150	750
MYSORE	1	240	240
		TOTAL:	XXXXXX
		GST[5%]	XXXXXX
		NET	XXXXXXX

```
#include<stdio.h>
#include<conio.h>
void dummy(float a){float *p=&a;}
struct  dmart
```

```
{
char item[20];
float qty,price;
}d[100];
void main()
{
int i=0,c=1;
char ch;
float amt,tot=0,gst,net;
clrscr();
while(1)
{
flushall();
printf("Enter product name "); gets(d[i].item);
printf("Enter Quantity "); scanf("%f",&d[i].qty);
```

```
printf("Enter each item price
");scanf("%f",&d[i].price);

flushall();

printf("Do you want to continue [y/n]
");scanf("%c",&ch);

if(ch=='y'||ch=='Y')

{

i++;

c++;

}

else

break;

}

puts("**********************************************
**********************************");

puts("\t\t\t   D-MART");
```

```
puts("\t\t\t SANATH NAGAR");
puts("**********************************************************************");
printf("%-20s%10s%10s%10s\n","ITEM","QTY","PRICE","AMOUNT");
puts("**********************************************************************");
for(i=0;i<c;i++)
{
amt=d[i].qty*d[i].price;
tot=tot+amt;
printf("%-20s%10.2f%10.2f%10.2f\n",d[i].item,d[i].qty,d[i].price,amt);
}
```

```
puts("**********************************************
**********************************");

printf("%40s%10.2f\n","Total: ",tot);

gst = tot*5/100;

net = tot + gst;

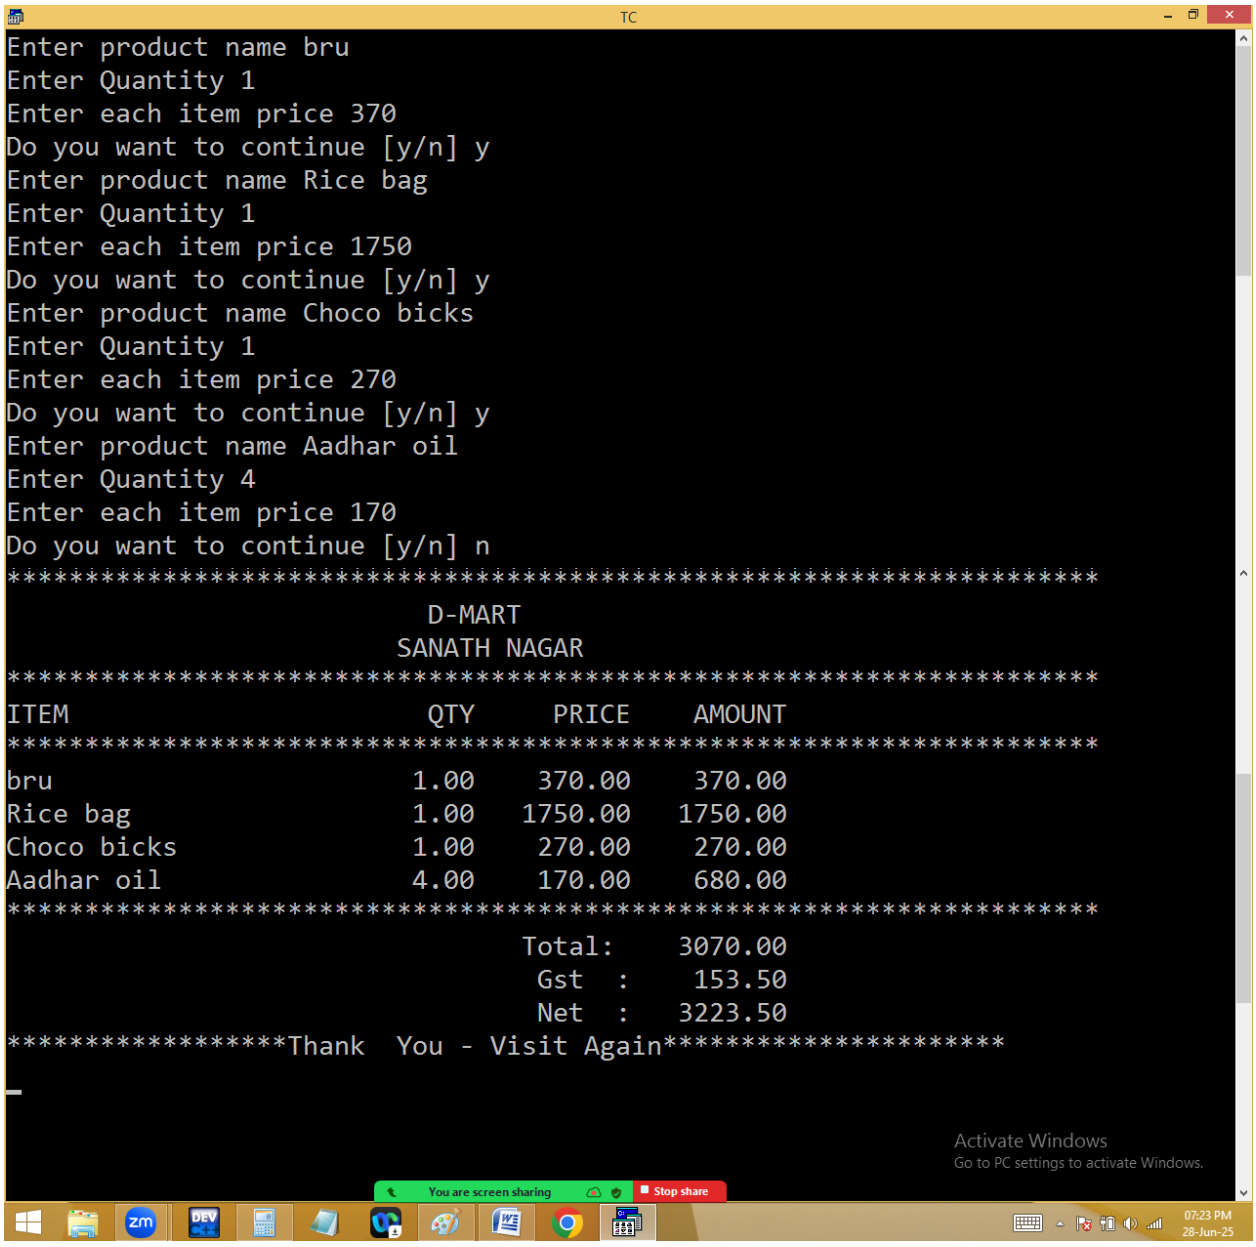
printf("%40s%10.2f\n","Gst  :",gst);

printf("%40s%10.2f\n","Net  :",net);

puts("********************Thank  You - Visit
Again**********************");

getch();

}
```


TC
Enter product name bru
Enter Quantity 1
Enter each item price 370
Do you want to continue [y/n] y
Enter product name Rice bag
Enter Quantity 1
Enter each item price 1750
Do you want to continue [y/n] y
Enter product name Choco bicks
Enter Quantity 1
Enter each item price 270
Do you want to continue [y/n] y
Enter product name Aadhar oil
Enter Quantity 4
Enter each item price 170
Do you want to continue [y/n] n
D-MART
SANATH NAGAR
ITEM QTY PRICE AMOUNT
bru 1.00 370.00 370.00
Rice bag 1.00 1750.00 1750.00
Choco bicks 1.00 270.00 270.00
Aadhar oil 4.00 170.00 680.00
Total: 3070.00
Gst : 153.50
Net : 3223.50
Thank You - Visit Again
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
07:23 PM
28-Jun-25