
STUDENT ENROLLMENT SYSTEM

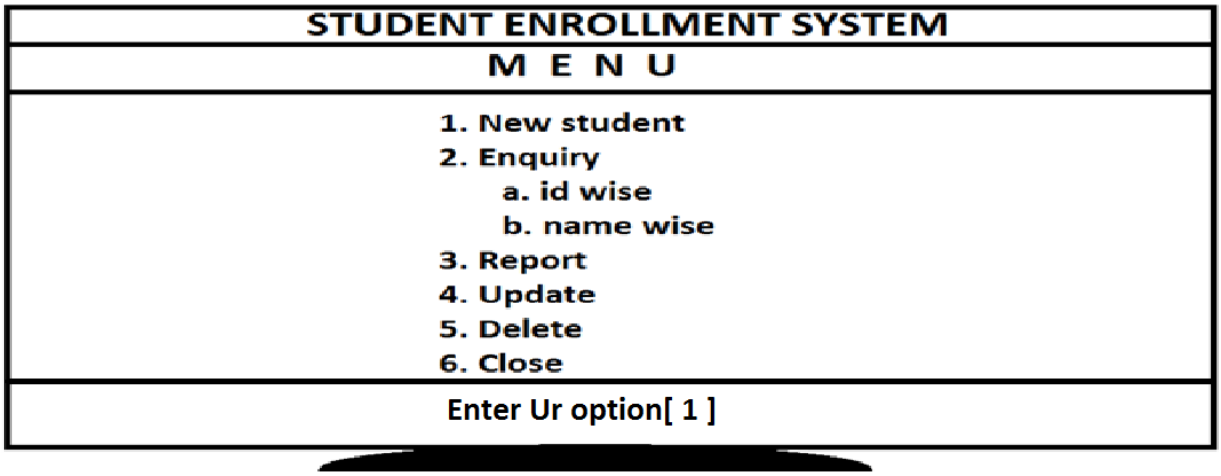


```
#include<stdio.h>

#include<conio.h>

#include<string.h>

#include<stdlib.h>

struct stu

{

int id;

char name[20];

}s;
```

```
FILE *fp1, *fp2;
int idno,op,found=0;
char sname[20],ch;
void newstu(); /* fun declaration */
void enquiry();
void update();
void delete();
void report();
void line()
{
puts("------------------------------------------------------------
");
}
void main()
{
clrscr();
line();
```

```
puts("\t\t\t STUDENT ENROLLMENT SYSTEM");
line();
puts("\t\t\t    M  E  N  U");
line();
puts("\t\t\t  1. New student");
puts("\t\t\t  2. Enquiry");
puts("\t\t\t    a. Id wise");
puts("\t\t\t    b. Name wise");
puts("\t\t\t  3. Report");
puts("\t\t\t  4. Update");
puts("\t\t\t  5. Delete");
puts("\t\t\t  6. Close");
line();
printf("\t\t\t Enter Ur option[ ]\b\b");
scanf("%d",&op);
switch(op)
{
```

```
case 1:
newstu(); /* fun calling */
break;
case 2:
enquiry();
break;
case 3:
report();
break;
case 4:
update();
break;
case 5:
delete();
break;
case 6:
exit(0);
```

```
default:
puts("Invalid Option Selected");
}
getch();
main();  /* recursion */
}

void newstu() /* fun definition */
{
clrscr();
fp1 = fopen("6pmc","a"); /* append */
while(1)
{
printf("Enter stu id ");
scanf("%d",&s.id);
printf("Enter stu name ");
scanf("%s",s.name);
```

```
fwrite(&s,sizeof(s),1,fp1);
printf("%s record creted successfully\n",s.name);
printf("Do you want to continue [y/n] ? ");
flushall();
scanf("%c",&ch);
if(ch=='n'||ch=='N')
break;
}
fclose(fp1);
}

void enquiry()
{
clrscr();
found=0;
fp1 = fopen("6pmc","r");
if(fp1==NULL)
```

```
puts("File not found");
else
{
line();
puts("\t\t\t 1. Id wise");
puts("\t\t\t 2. Name wise");
puts("\t\t\t 3. Main menu");
line();
puts("\t\t\t Enter ur option[ ]\b\b");
scanf("%d",&op);
if(op==1)
{
printf("Enter stu id to search ");
scanf("%d",&idno);
fread(&s,sizeof(s),1,fp1);
while(!feof(fp1))
{
```

```
if(idno==s.id)
{
found=1;
puts("Id\tName");
line();
printf("%d\t%s\n",s.id,s.name);
break;
}
fread(&s,sizeof(s),1,fp1);
}
fclose(fp1);
}
else if(op==2)
{
printf("Enter stu name to search ");
scanf("%s",sname);
fread(&s,sizeof(s),1,fp1);
```

```
while(!feof(fp1))
{
if(stricmp(sname,s.name)==0)
{
found=1;
puts("Id\tName");
line();
printf("%d\t%s\n",s.id,s.name);
break;
}
fread(&s,sizeof(s),1,fp1);
}
}
else if(op==3)
main();

if(found==0)
```

```
puts("Stu not found");
}
}

void  report()
{
clrscr();
fp1 = fopen("6pmc","r");
if(fp1==NULL)
puts("File not found");
else
{
line();
puts("Id\tName");
line();
fread(&s,sizeof(s),1,fp1);
while(!feof(fp1))
```

```
{
printf("%d\t%s\n",s.id,s.name);
fread(&s,sizeof(s),1,fp1);
}
}
fclose(fp1);
}
void  update()
{
clrscr();
found=0;
fp1 = fopen("6pmc","r+"); /* read and write */
printf("Enter stu id to update ");
scanf("%d",&idno);
fread(&s,sizeof(s),1,fp1);
while(!feof(fp1))
{
```

```
if(idno==s.id)
{
found=1;
puts("Id\tName");
line();
printf("%d\t%s\n",s.id,s.name);
printf("Enter new id, name ");
scanf("%d %s",&s.id,s.name);
fseek(fp1, ftell(fp1)-sizeof(s),0); /* 0 means from curr position*/
fwrite(&s,sizeof(s),1,fp1);
printf("%s record updated",s.name);
break;
}
fread(&s,sizeof(s),1,fp1);
}
fclose(fp1);
```

```
if(found==0)
puts("Stu not found");
}

void delete()
{
clrscr();
found=0;
fp1 = fopen("6pmc","r");
fp2 = fopen("temp","w");
printf("Enter stu id to delete ");
scanf("%d",&idno);
fread(&s,sizeof(s),1,fp1);
while(!feof(fp1))
{
if(idno==s.id)
{
```

```
puts("Id\tName");
line();
printf("%d\t%s\n",s.id,s.name);
found=1;
}
else
fwrite(&s,sizeof(s),1,fp2);
fread(&s,sizeof(s),1,fp1);
}
fclose(fp1);
fclose(fp2);
flushall();
if(found==1)
{
flushall();
printf("R u sure to delete ? ");
scanf("%c",&ch);
```

```
if(ch=='y'||ch=='Y')
{
remove("6pmc");
rename("temp","6pmc");
puts("One row deleted");
}
else
puts("Operation cancelled by the user");
}
}
```