R1. **Write a C program to find the second-largest number in an array of 10 numbers, First, read 10 numbers in the int array from a user and then find the second-largest number in the array. Complete the below code.**

```
#include<stidio.h>
int  main()
{
int num[10];
```

R2. **Suppose you have an array cost[ ] of size n where cost[i] is the cost of the i th step on a staircase. Once you pay the cost, you can either climb one or two steps of the stairs. You can either start from the step with index 0 or step with index 1. Write a function minCost(int cost[ ], int n) that computes and returns an integer value which is the minimum cost that is incurred in reaching the top floor.**

Input Format: Enter the number of elements in the array and create the array.
Constraints Note: Print the result in the main() function. Output Format Minimum cost in reaching the top floor.


Sample Input 1
10 1 100 1 1 1 100 1 1 100 1

Sample Output 1
Minimum Cost = 6

Explanation: Cheapest is: start on cost[0], and only step on 1s, skipping cost[3].

Hint: minCost[i] = cost[i] + min(minCost[i - 1], minCost[i - 2]) for i != 2. minCost[0] = cost[0], minCost[1] = cost[1]

R3. **Write a C program to print the Hollow Full Pyramid Pattern using loops. (The Hollow Full Pyramid Pattern looks like a full pyramid, but its interior is hollow, except for the topmost row and the base. It resembles a triangle with a peak at the top center and a widening base as you go down.)**

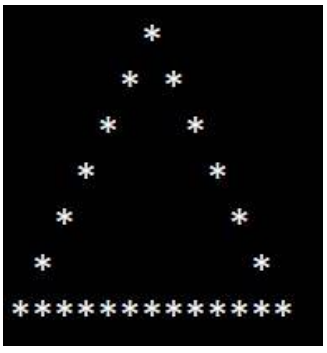

R4. **Create a program that counts the frequency of each element in an array.**

R5. **Write a program to input 3 coordinates of a triangle from the user. Then, take a fourth coordinate and check whether the fourth point lies inside the triangle or not?**

R6. **Write a program that finds the 3rd smallest element in an unsorted array.**