
Perfectub® BKTB-200 • 60" x 30" AFR tub

The 60" x 30" Perfectub in an above-the-floor rough (AFR) configuration. On file for reference: this model is not currently offered for sale.

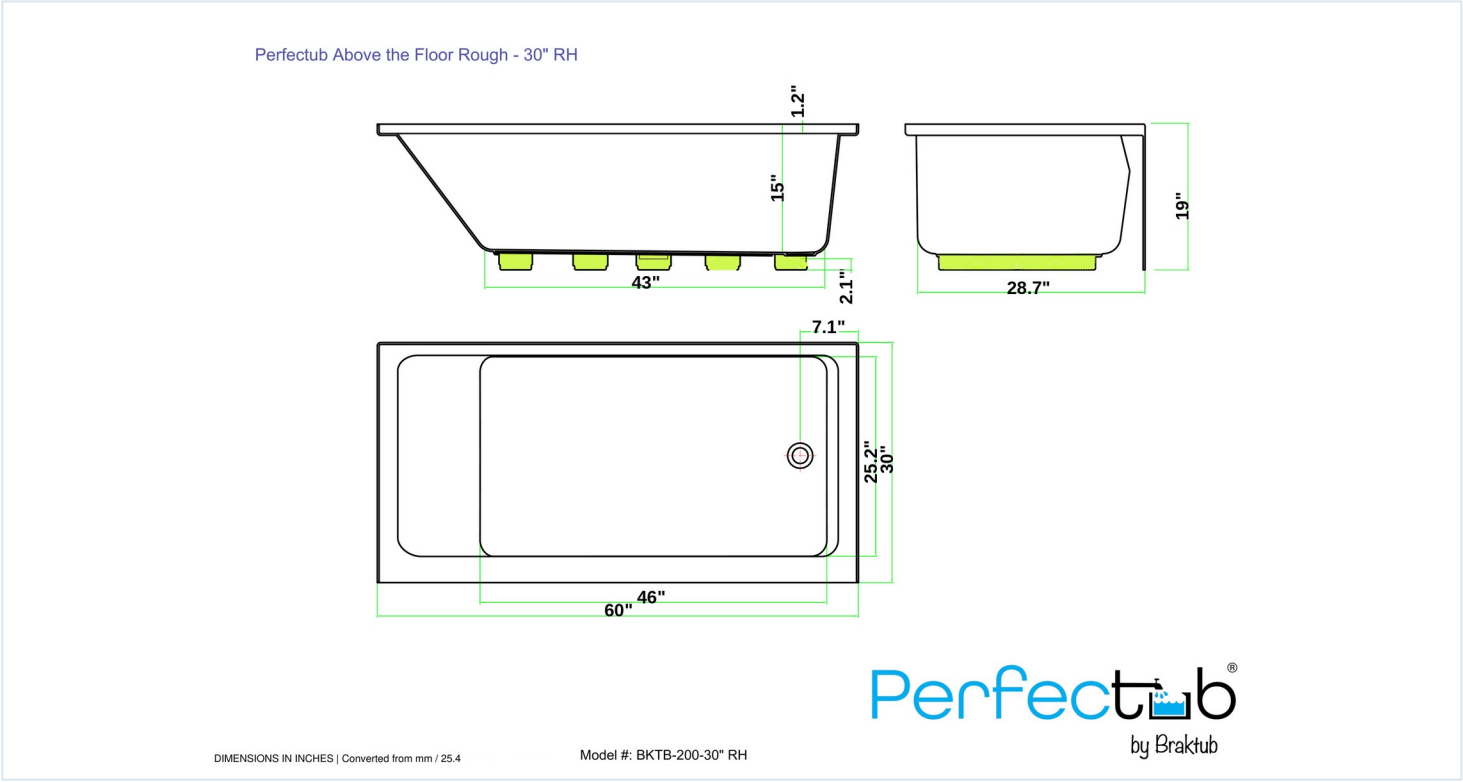

Drawing: Brak Tub cut sheet "BKTB-200 AFR model" (30", right-hand). Drain on the right when viewed from the front.

Dimensions & ordering

Spec	BKTB-200 (AFR)
Length x width	60" x 30"
Overall height	19"
Interior height (nominal Step In/Out)	15"
Interior length (back slope to drain)	46"
Availability	Special order
Model No.	BKTB-200-AFR-RH
Weight / Shipping Wgt	110 / 180

Construction & installation

Item	Detail
Surface	High-gloss acrylic; fiberglass reinforced
Back ledge	1¼", steel-rod reinforced to carry the tile wall; a ¼" shim removes the ledge
Bottom	AFR model sits on feet that raise the tub and leave space for above-the-floor plumbing
Waste & overflow	Linear overflow (collector welded in place), 1.5 to 1.25 inch adapter, drain with toe touch pop-up cap: all included.
Subfloor	Self-supporting smooth subfloor. Wet mortar bed or foam bedding recommended on uneven/older floors
Flange	Nail or screw and washer at top edge of flange; screws through the flange void the warranty.
Warranty	Limited lifetime (original residential buyer); 1 yr commercial; accessories 1 yr parts