- [x] roomAssignment('Sherlock Sassafrass', 4)
- [x] roomAssignment(year=6, name='Minnie George')

8.

A bank must generate a report that shows the average balance for all customers each day. The report must truncate the decimal portion of the balance.

Which two code segments achieve the goal? Each correct answer presents a complete solution. (Choose 2.)

- [ ] average_balance = float(total_deposits // number_of_customers)
- [ ] average_balance = total_deposits ** number_of_customers
- [x] average_balance = int(total_deposits / number_of_customers)
- [x] average_balance = total_deposits // number_of_customers

9.

Nume: Schiopu

1.

You are designing a decision structure to convert student's numeric grades (`grade`) to letter grades (`letter_grade`).
The program must assign letter grades as specified in the following table:
Percentage range Letter grade
90 through 100 A
80 through 89 B
70 through 79 C
65 through 69 D
0 through 64 F

For example, if the user enters a 90, the output should be `"Your letter grade is A"`.
Likewise, if a user enters an 89, the output should be `"Your letter grade is B"`.
Complete the code by selecting the correct code segment from each drop-down list.

```python
#Letter Grade Converter
grade = int(input("Enter a numeric grade"))

if grade >= 90: # dropdown 1
letter_grade = 'A'
if grade >= 80 and grade < 90: # dropdown 2
letter_grade = 'B'
if grade >= 70 and grade < 80: # dropdown 3
letter_grade = 'C'
if grade >= 65 and grade < 70: # dropdown 4
letter_grade = 'D'
else:
letter_grade = 'F'
```

22:00 4G
IMAGE 2025-10-...

7.

You are creating a Python program that compares numbers. You write the following code. Line numbers are included for reference only.

```
01 num1 = eval(input ("Please enterthe first number: "))
02 num2 = eval(input ("Please enter the second number: "))
03 ifnum1 == num2:
04 print("The two numbers are equal.")
05 if num1 <= num2:
06 print("Number 1 is less than number 2.")
07 if num1> num2:
08 print("Number1 is greater than number 2.")
09 if num2 = num1:
10 print("The two numbers are thesame.")
```

You need to ensure that the comparisons are accurate. For each statement, select True or False. Note: You will receive partial credit for each correct selection.

The print statement at line 04 will print only if the two numbers are equal in value.
◉ Yes ○ No

The print statement at line 06 will print only if num1 is less than num2.
○ Yes ◉ No

The print statement at line 08 will print only if num1 is greater than num2.
◉ Yes ○ No

The statement at line 09 is an invalid comparison.
◉ Yes ○ No

Search

22:00 4G
IMAGE 2025-10-...

6.

You create the following Python function to calculate the power of a number. Line numbers are included for reference only.

```
01 # The calc_power function calculates exponents
02 # x is the base
03 # y is the exponent
04 # The value of x raised to the y power is returned
05 def calc_power(x, y):
06 comment = "# Return the value"
07 return x ** y # raise x to the y power
```

For each statement, select True or False.

Python will not check the syntax of lines 01 through 04.
(•) Yes ( ) No

The pound sign (#) is optional for lines 02 and 03.
( ) Yes (•) No

The string in line 06 will be interpreted as a comment.
( ) Yes (•) No

Line 07 contains an inline comment.
(•) Yes ( ) No

☐ open("local_data", "r+")

10.

You need to write code that performs the following tasks:

- Call the process() function.
- If the process() function throws an error, call the logError() function.
- Always call the displayResult() function after calling the process() function.

Complete the code by moving the appropriate code segments from the list on the left to the correct locations on the right.

try:	process()
except:	logError
finally:	displayResult()

assert: raise:

11.

Which code segment should use at line 03? while (index < 10):

Which code segment should use at line 06? if numbers[index] == 6:

27.

You develop a Python application for your company.

You need to complete the code so that the print statements are accurate.

Complete the code by selecting the correct code segment from each drop-down list.

```
numList = [1, 2, 3, 4, 5]
alphaList = ["a", "b", "c", "d", "e"]
if numList == alphaList:
print("The values in numList are equal to alphaList")
else:
print("The values in numList are not equal to alphaList")
```

28.

Search

22:00 4G
IMAGE 2025-10-...


```
name=input("Please enter your name (q to quit)? ")
```

22.

A company needs help updating their file system. You must create a simple file-manipulation program that performs the following actions:
Creates a file using the specified name.
Appends the phrase "End of listing" to the file.

You need to complete the code to meet the requirements.

Complete the code by selecting the correct code segment from each drop-down list.

```
import os
file = [open("myFile.txt","a")]
[file.write] ("End of listing")
file.close()
```

23.

Review the following code segment:

21:58 4G
IMAGE 2025-10-...

Displays a message box that allows user input

13.

Review the following code:

```
x = "oranges"
y = "apples"
z = "bananas"
data = "{1} and {0} and {2}"
print(data.format(z, y, x))
```

What is the output of the print statement?

- [ ] oranges and apples and bananas
- [x] apples and bananas and oranges
- [ ] bananas and oranges and apples
- [ ] apples and oranges and bananas

22:00 4G
IMAGE 2025-10-...

8.

You are writing a Python program to determine if a number (num) the user inputs is one, two, or more than two digits (digits).

Complete the code by selecting the correct code segment from each drop-down list.

```
num = int(input("Enter a number with 1 or 2 digits: "))
digits = "0"

[if num > -10 and num < 10:]
digits = "1"

[elif num > -100 and num < 100:]
digits = "2"

[else:]
digits = ">2"

print(digits + " digits.")
```

taktest.x10.mx/start_test.php?test_id=31

Submitting in 0:00 minutes...

33.

You are creating a Python program that will let a user guess a number from 1 to 10. The user is allowed up to three guesses. If the user guesses the correct number, the program must stop asking for guesses. Complete the code by moving the appropriate code segments from the list on the left to the correct locations on the right. You may use each code segment once, more than once, or not at all.

```
from random import randint
target= randint(1,10)
chance = 1
print("Guess an integer from 1 to 10. You will have 3chances.")
[          while chance <= 3:          ]
guess = int(input("Guess an integer: "))
if guess > target:
print("Guess is too high")
elif guess < target:
print("Guess is too low" )
else:
print("Guess is just right!" )
[          break          ]
[          chance += 1          ]
```

[ ] [ ] [chance = 2] [pass]

[while chance < 3:] [ ]

Search

22:00 4G
IMAGE 2025-10-...

apples and oranges and bananas

14.

The Script.py file contains the following code:
import sys
print(sys.argv[2])
You run the following command:
python Script.py Cheese Bacon Bread
What is the output of the command?

- [ ] Bread
- [ ] Script.py
- [ ] Cheese
- [x] Bacon

15

- [x] random.randint(5, 11)
- [x] random.randrange(5, 12, 1)

30.

Complete the statements about assert methods by selecting the correct option from each drop-down list.

To test that the value of variables a and b are the same, use: assertEqual(a, b)

To test that objects a and b are the same, use: assertIs(a, b)

To test weather a value exists in a list, use assertIn(a, b)

31.

You are writing a function to perform safe division of numbers.
You need to ensure that a denominator and numerator are passed to the function and that the denominator is not zero.
Complete the code by selecting the correct code segment from each drop-down list.

```
def safe_divide(numerator, denominator):
    if numerator is None and denominator is None:
        print("A required value is missing.")
    elif denominator == 0:
        print("The denominator is zero.")
```

22:00 4G
IMAGE 2025-10-...

ValueError:
print("Not a valid number. Try again...")

5.

For each statement about try statements, select True or False.

A try statement can have one or more except clauses.
(•) Yes ( ) No

A try statement can have a finally clause without an except clause.
(•) Yes ( ) No

A try statement can have a finally clause and an except clause.
(•) Yes ( ) No

A try statement can have one or more finally clauses.
( ) Yes (•) No

6.

29.

You are writing code to meet the following requirements:
- Allow users to repeatedly enter words.
- Output the number of characters in each word.

Complete the code by selecting the correct option from each drop-down list.

```
x = "Hello"
[while] x != "QUIT":
num = 0
[for] char [in] x:
num += 1
print(num)
x = input("Enter a new word or QUIT to exit: ")
```

30.

A coworker wrote a program that inputs names into a database. Unfortunately, the program reversed the letters in each name.

Submitting in 0:00 minutes...

{10:0}

{5:1f}

{7:2f}

26.

You are writing a program that calculates a user's approximate year of birth.
The program asks users for the user's age (`age`) and the current year (`year`),
then outputs the user's approximate year of birth (`born`) in a message (`message`).

You write the following code:

```
age = input("Enter your age: ")
year = 2000
born = year - int(age)
message = "You were born in " + str(born)
print(message)
```

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

What data type is age in line 01? int

What data type is born in line 03? int

What data type is message in line 05? string

27.

Review the following program. Line numbers are for reference only:

```
def petStore(category, species, breed = "none"):
print(f"\nYou have selected an animal from the {category} category.")
if breed == "none":
```

The code will generate an error in line 02 and line 05.
◉ Yes ○ No

The code will correctly output data to the console.
○ Yes ◉ No

18.

You are developing a Python application for your company. You write the following code:

```
numList = [1, 2, 3, 4, 5]
alphaList = ["a", "b", "c", "d", "e"]
print(numList is alphaList)
print(numList == alphaList)
numList = alphaList
print(numList is alphaList)
print(numList == alphaList)
```

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

What is displayed after thr first print? False

What is displayed after thr second print? False

What is displayed after thr third print? True

What is displayed after thr fourth print? True

19.

The Script.py file contains the following code:

```
import sys
```

31.

A game development company needs a way to find the number of words in a list that contain a specific letter.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

```
# Function accepts list of words and letter to search for.
# Returns count of the number of words that contain that letter.
def count_letter(letter, word_list):
count = 0
for [word in word_list:]
if [letter in word:]
count += 1
return count

# word_list is populated by the readWords() function. Code not shown.
word_list = readWords()

letter = input("Which letter would you like to count")
letter_count = count_letter(letter, word_list)
print("There are: ", letter_count, " words that contain ", letter)
```

32.

Search

2.

You need to identify the data types of various type operations.

Move the appropriate data types from the list to the correct type operations on the right.
You may use each data type once, more than once, or not at all.

type(+1E10) → int

type(5.0) → float

type("True") → str

type(False) → bool

Search

Submitting in 0:00 minutes...

```
result_str = result_str + "*"
result_str = result_str + "\n"
print(result_str)
```

13.

You are writing a Python program that evaluates an arithmetic formula.

The formula is described as:
"b equals a multiplied by negative one, then raised to the second power",
where `a` is the value that will be input and `b` is the result.

You create the following code segment. Line numbers are included for reference only:

```
01 a = int(input("Enter a number for the equation: "))
02 b = [ ( ] [ - ] [ a ] [ ) ] [ **2 ]
```

Complete the code on line 02 by dragging the appropriate code segments into the correct locations.
You may use each code segment once, more than once, or not at all.

[ ] [ ] [ ] [ ] [ ]

[**] [2]

14.

Answer the questions about documenting Python code by selecting the correct option from each drop-down list.

taktest.ir10.ro/start_test.php?test_id=31

Submitting in 0:00 minutes...

35.

You write the following code to determine a student's final grade based on their current grade (grade) and rank (rank):

```
grade = 76
rank = 3

if grade > 80 and rank >= 3:
grade += 10
elif grade >= 70 and rank > 3:
grade += 5
else:
grade -= 5

print(grade)
```

What value will print?

- [x] 71
- [ ] 76
- [ ] 81
- [ ] 86

Trimite răspunsurile

Search

tter grade based on the fol
umeric grade as a whole n

he correct code segment f



else:
index += 1

22.

You are writing code to meet the following requirements:
• Allow users to repeatedly enter words.
• Output the number of characters in each word.
Complete the code by selecting the correct option from each drop-down list.

```
x = "Hello"
while x != "QUIT":
num = 0
for char in x:
num += 1
print(num)
x = input("Enter a new word or QUIT to exit: ")
```

23.

You are writing code to return a letter grade based on the following criteria:
- Thevariable `grade` stores the numeric grade as a whole number between 0 and 100.
- Grades from 90 to 100 = A.
- Grades from 80 to 89 = B

22:00 4G

IMAGE 2025-10-...

XML Quiz

taktest.x10.mx/start_test.php?test_id=31

Submitting in 0:00 minute

21.

You are writing a program to randomly assign rooms (room_number) and team-building groups (group) for a company retreat.

Complete the code by selecting the correct code segment from each drop-down list.

```
import random
roomsAssigned=[1]
room_number=1
groupList=["Ropes","Rafting","Obstacle","Wellness"]
count=0
print("Welcome to CompanyPro's Team-Building Weekend!")
name=input("Please enter your name (q to quit)? ")
while name.lower() != 'q' and count < 50:
while room_number in roomsAssigned:
    room_number=random.randint(1,50)
print(f"{name}, your room number is {room_number}")
roomsAssigned.append(room_number)
    group = random.chioce(groupList)
print(f"You will meet with the {group} Group this afternoon.")
count+=1
name=input("Please enter your name (q to quit)? ")
```

22.

elif denominator == 0:
print("The denominator is zero.")
else:
return numerator / denominator

32.

You create the following program to locate a conference room and display the room name.
The program outputs "Room does not exist." even when 1 or 2 is entered.

```
01 rooms = {1: 'Foyer', 2: 'Conference Room'}
02 room = input('Enter the room number: ')
03 if not room in rooms:
04 print('Room does not exist.')
05 else:
06 print("The room name is " + rooms[room])
```

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

Which two data types are stored in the rooms dictionary at line 01? int and string

What is the data type of room at line 02? str

Why does line 03 fail to find the rooms? Invalid syntax

33.

You are creating an eCommerce script that accepts input from the user and outputs the data in a comma-delimited format.

22:00 4G
IMAGE 2025-10-...

18.

For each statement about the following function, select True or False.

```
def
grosspay(hours=40, rate=25, pieces=0, piecerate=0, salary=0):
overtime=0
if pieces > 0:
return pieces * piecerate
if salary > 0:
pass
if hours > 40:
overtime = (hours-40) * (1.5 * rate)
return overtime + (40 * rate)
else:
return hours * rate
```

Note: You will receive partial credit for each correct selection.

A function call of grosspay() will create a syntax error.
○ Yes ◉ No

A function call of grosspay(salary=50000) will return nothing.
○ Yes ◉ No

A function call of grosspay(pieces=500, piecerate=4) will return a result of 2000.
◉ Yes ○ No

To meet the requirements, you must change line 01 to: def increment_score(score, bonus, points = 1):
(•) Yes ( ) No

If you do not change line 01 and the function is called with only two parameters, an error occurs.
(•) Yes ( ) No

Line 03 will also modify the value of the variable points declared at line 06.
( ) Yes (•) No

29.

You are writing code to generate a random integer with a minimum value of 5 and a maximum value of 11.

Which two functions should you use? Each correct answer presents a complete solution. (Choose 2.)

- [ ] random.randint(5, 12)
- [ ] random.randrange(5, 11, 1)
- [x] random.randint(5, 11)
- [x] random.randrange(5, 12, 1)

30.

Complete the statements about assert methods by selecting the correct option from each drop-down list.

To test that the value of variables a and b are the same, use: assertEqual(a, b)

To test that objects a and b are the same, use: assertIs(a, b)

To test weather a value exists in a list, use assertIn(a, b)

What is the data type of room at line 02? str

Why does line 03 fail to find the rooms? Invalid syntax

33.

You are creating an eCommerce script that accepts input from the user and outputs the data in a comma-delimited format.

You write the following code to accept input:

```
item = input("Enter the item name: ")
sales = int(input("Enter the quantity: "))
```

The output must meet the following requirements:
- Enclose strings in double quotes.
- Do not enclose numbers in quotes or other characters.
- Separate items by commas.

Which two code segments could you use? Each correct answer presents a complete solution. (Choose 2.)

- [ ] print(item + ',' + sales)
- [x] print('"{}",{1}'.format(item, sales))
- [ ] print('"' + item + '"', ',', sales)
- [x] print('"{0}",{1}'.format(item, sales))

34.

Which command will print the docstring? print(cube.__doc__)

15.

You develop a Python application for your company. A list named employees contains 200 employee names, the last five being company management. You need to slice the list to display all employees excluding management. Which two code segments should you use? Each correct answer presents a complete solution. (Choose 2.)

- [ ] employees[1:-5]
- [x] employees[0:-5]
- [ ] employees[1:-4]
- [ ] employees[0:-4]
- [x] employees[:-5]

16.

You are creating a function that manipulates a number passed into the function as a float value. The function must perform the following tasks: • Take the absolute value of the float. • Remove any decimal points after the integer. Which two math functions should you use? Each correct answer is part of the solution. (Choose 2.)

- [x] math.floor(x)
- [x] math.fabs(x)

22:00 4G
IMAGE 2025-10-...

19.

You are building a Python program that displays all prime numbers from 2 to 100. (A prime number is any number that is divisible only by itself and 1.)
Complete the code by moving the appropriate code segments from the list on the left to the correct locations on the right.

p = 2 while p <= 100: is_prime = True

for i in range(2, p):
if p % i == 0:
is_prime = False

break

if is_prime == True:
print(p)

p = p + 1

p = 2 is_prime = True while p <= 100:

continue

Search

- [ ] print("" + item + "", ',', sales)
- [x] print('"{0}",{1}'.format(item, sales))

34.

A bank is migrating their legacy bank transaction code to Python.

The bank hires you to document the migrated code.

Which documentation syntax is correct?

- [x] def get_balance():\n # Returns the current balance of the bank account\n return balance
- [ ] // Returns the current balance of the bank account\ndef get_balance():\n return balance
- [ ] def get_balance():\n /* Returns the current balance of the bank account */\n return balance
- [ ] ' Returns the current balance of the bank account\ndef get_balance():\n return balance

35.

You are creating an interactive Times Table Helper program intended for elementary school children.

Submitting in 2:54 minutes...

1.

You are writing a Python application that includes multiple operations on the same line of code.
You need to determine the correct order of operations.

Move the type of operation from the list on the left to the correct locations on the right.
with the type of operation that will be performed first at the top and the type of operation
that will be performed last at the bottom.

Operation type performed first: Parentheses

Operation type performed second: Exponents

Operation type performed third: Unary positive, negative, not

Operation type performed fourth: Multiplication and Division

Operation type performed fifth: Addition and Subtraction

Operation type performed last: And

Search

A bicycle company is creating a program that allows customers to log the number of miles biked.
The program will send messages based on how many miles the customer logs.
You write the following Python code. Line numbers are included for reference only.

```
01
02 name = input("What is your name? ")
03 return name
04
05 calories = miles * calories_per_mile
06 return calories
07 distance = int(input("How many miles did you bike this week? "))
08 burn_rate = 50
09 biker = get_name()
10 calories_burned = calc_calories(distance, burn_rate)
11 print(biker, ", you burned about ", calories_burned, " calories.")
```

You need to define the two required functions.
Which two code segments should you use for line 01 and line 04?
Each correct answer presents part of the solution. (Choose 2.)

- [x] 01 def get_name():
- [ ] 01 def get_name(biker):
- [ ] 01 def get_name(name):
- [ ] 04 def calc_calories():
- [ ] 04 def calc_calories(miles, burn_rate):
- [x] 04 def calc_calories(miles, calories_per_mile):

Search

22:00 4G
IMAGE 2025-10-...

```
unittest.TestCase ):
    test_isinstance(self) (self):
        self.assertIsInstance(obj, cls, msg=None)
if __name__ == '__main__':
    unittest.main()
```

4.

You are creating a program that accepts user input. The program must cast the input into an integer, and properly handle the error if it cannot do so.

```
while True:
    try:
        x = int(input("Please enter a number: "))
        break
    except ValueError:
        print("Not a valid number. Try again...")
```

5.

For each statement about try statements, select True or False.

A try statement can have one or more except clauses.

5.

You are creating a program to calculate the rental fee for DVDs. The fee structure is as follows:

- The default cost (`cost_per_night`) is $1.59 per night.
- If the customer returns the DVD after 8 PM, they are charged for an extra night.
- Sunday DVD rentals receive a 30% discount for the full length of the rental.
- Thursday DVD rentals receive a 50% discount for the full length of the rental.

Complete the code to meet the requirements by selecting the correct code segment from each dropdown list.

```
#DVD Rental Calculator
ontime = input("Was the video returned before 8 PM? Y or N").lower()
days_rented = int(input("How many days was the video rented?"))
weekday = input("What day was the video rented?").capitalize()
cost_per_night = 1.59
if ontime [== "n"]
days_rented +=1
if weekday [== "Sunday"]
total = (days_rented * cost_per_night) * 0.7
elif weekday [== "Thursday"]
total = (days_rented * cost_per_night) * 0.5
else:
total = days_rented * cost_per_night
print("Cost of the DVD rental is : $", total)
```

6.

17.

The following function calculates the value of an expression that uses an exponent. Line numbers are included for reference only.

```
01 def calc_power(a, b):
02 return a**b
03 base = input("Enter the number for the base: ")
04 exponent = input("Enter the number for the exponent: ")
05 result = calc_power(base, exponent)
06 print("The result is " + result)
```

For each statement, select True or False.

The code will generate an error in line 03 and line 04.
○ Yes ◉ No

The code will generate an error in line 02 and line 05.
◉ Yes ○ No

The code will correctly output data to the console.
○ Yes ◉ No

18.

You are developing a Python application for your company. You write the following code:

```
numList = [1, 2, 3, 4, 5]
alphaList = ["a", "b", "c", "d", "e"]
print(numList is alphaList)
print(numList == alphaList)
```

Other code can open the file after this code runs.
◉ Yes ○ No

25.

You are writing a function to read a data file and print the results as a formatted table.
You write code to read a line of data into a list named fields.

The printout must be formatted to meet the following requirements:
• Fruit name (fields[0]): Left-aligned in a column 10 spaces wide.
• Weight (fields[1]): Right-aligned in a column 5 spaces wide with one digit after the decimal point.
• Price (fields[2]): Right-aligned in a column 7 spaces wide with two digits after the decimal point.

The following shows a sample output:
Oranges 5.6 1.33

Complete the code using drag-and-drop by placing the correct formatting segments:

print(" {0:10} _ {1:5.1f} _ {2:7.2f} _".format(fields[0], eval(fields[1]), eval(fields[2])))

{10:0} {5:1f} {7:2f}

26.

30.

A coworker wrote a program that inputs names into a database. Unfortunately, the program reversed the letters in each name.

You need to write a Python function that outputs the characters in a name in the correct order.

Complete the code by selecting the code segment from each drop-down list.

```
# Function reverses characters in a string.
# returns new string in reversed order.

def reverse_name(backward_name):
forward_name = ""
length = [ len(backward_name) - 1 ]
while length >= 0:
forward_name += [ backward_name[length] ]
length = length - 1
return forward_name

print(reverse_name("nohtyp"))
```

31.

22:00 4G
IMAGE 2025-10-...

The code will generate an error in line 02 and line 05.
Yes No

The code will correctly output data to the console.
Yes No

12.

What does the following statement do?\n\ndata = input()

- [x] Allows a user to enter text in the console
- [ ] Creates an HTML input element
- [ ] Displays all input peripheral devices on the computer
- [ ] Displays a message box that allows user input

13

finally: displayResult()

assert:

11.

A company needs help updating their file system.
You must create a simple file-manipulation program that performs the following actions:
- Checks to see whether a file exists.
- If the file exists, displays its contents.
Complete the code by selecting the correct code segment from each drop-down list.

```
import os
if [os.exist("myFile.txt")]
file = open('myFile.txt')
[print(file.read())]
file.close()
```

12.

You are writing code to create an E shape from asterisks. You need to print five lines of code,
with four asterisks each on the first, third, and fifth lines and one asterisk each on the second and fourth lines, as shown.

```
****
```

Sonerie

Place the notes within /* and */ in any code segment.

Place the notes within in any code segment.

16.

A company needs help updating their file system.
You must create a simple file-manipulation program that performs the following actions:
- Checks to see whether a file exists.
- If the file exists, displays its contents.
Complete the code by selecting the correct code segment from each drop-down list.

```
import os
if [os.exist("myFile.txt"):]
file = open('myFile.txt')
[print(file.read())]
file.close()
```

17.

26.

You find errors while evaluating the following code. Line numbers are included for reference only.

```
01 numbers = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
02 index = 0
03 while(index < 0)
04 print(numbers[index])
05
06 if numbers(index) = 6
07 break
08 else:
09 index += 1
```

You need to correct the code at line 03 and line 06.

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

Which code segment should use at line 03? while (index < 10):

Which code segment should use at line 06? if numbers[index] == 6:

27.

for char in x:
num += 1
print(num)
x = input("Enter a new word or QUIT to exit: ")

23.

You are writing code to return a letter grade based on the following criteria:
- Thevariable `grade` stores the numeric grade as a whole number between 0 and 100.
- Grades from 90 to 100 = A.
- Grades from 80 to 89 = B.
- Grades from 70 to 79 = C.
- All other grades are failing.

Complete the code by selecting the correct code segment from each drop-down list.

if grade <= 100:
if grade>= 90:
print("Your grade is A.")
elif grade >= 80:
print("Your grade is B.")
elif grade < 80 and grade> 69:
print("Your grade is C.")
else:
print("Your grade is failing.")
else:
print("Invalid grade entered.")

24.

Other code can open the file after this code runs.
◉ Yes ○ No

24.

You need to identify the results of performing various slicing operations on the following sequence structure:
alph = "abcdefghijklmnopqrstuvwxyz"

Move the appropriate results from the list on the left to the correct slicing operations on the right.
You may use each result once, more than once, or not at all.

alph[3:6] def

alph[:6] abcdef

cde

abcde

taktest.x10.mx/start_test.php?test_id=31

Submitting in 0:00 minutes...

28.

You are creating a function to calculate admission fees (admission_fee) based on the following rules:

- Anyone under age 5 = free admission
- Anyone age 5 or older who is in school = $10
- Anyone age 5 to 17 who is not in school = $20
- Anyone older than age 17 who is not in school = $50

rate represents the price in dollars.

Complete the code by selecting the correct code segment from each drop-down list.

```
def admission_fee(age, school):
rate = 0
[if age >= 5 and school == True:]
rate = 10
[else age >= 5 and school == False:]
[if age <= 17:]
rate = 20

else:
rate = 50

return rate
```

29.

Search

Submitting in 0

32.

Review the following code segment:

```
product = 2
n = 5
while (n != 0):
product *= n
print (product)
n -= 1
if n == 3:
break
```

How many lines of output does the code print?

- [ ] 1
- [x] 2
- [ ] 3
- [ ] 4

33.

You are creating a Python program that will let a user guess a number from 1 to 10.

Search

print(file.read())
file.close()

12.

You are writing code to create an E shape from asterisks. You need to print five lines of code,
with four asterisks each on the first, third, and fifth lines and one asterisk each on the second and fourth lines, as shown.

```
****
*
****
*
****
```

Complete the code by selecting the correct numbers in the boxes. Enter each number as an integer.

```
result_str = ""
for row in range(1, 6 ):
for column in range(1, 5 ):
if (row == 1 or row == 3 or row == 5):
result_str = result_str + "*"
elif column == 1:
result_str = result_str + "*"
result_str = result_str + "\n"
print(result_str)
```

13.

Complete the code on line 02 by dragging the appropriate code segments into the correct locations.
You may use each code segment once, more than once, or not at all.

[ ] [ ] [ ] [ ]
[**] [2]

14.

Answer the questions about documenting Python code by selecting the correct option from each drop-down list.

Whitch caracter(s) signal the beginning and ending of single-line docstring? """

When documenting a function, what is the standart location for the docstring? Immediately after the function header

Review the following function:

```
def cube(n):
""" Returns the cube of number n """
return n*n*n
```

Whitch command will print the docstring? print(cube.__doc__)

15.

You develop a Python application for your company. A list named employees contains 200 employee names, the last five being company management. You need to slice the list to display all employees excluding management. Which two code segments should you use? Each correct answer presents a complete solution. (Choose 2.)

☐ employees[1: 5]

3.

You need to test whether an object is an instance of a specific class.

Complete the code by selecting the correct option from each drop-down list.

```
import [import] unittest
class TestIsInstance([unittest.TestCase]):
def [test_isInstance(self)] (self):
    [self.assertIsInstance(obj, cls, msg=None)]
if _name_ == '_main_':
unittest.main()
```

4.

taktest.x10.mx/start_test.php?test_id=31

Submitting in 0:00 minutes

25.

You work on a team that is developing a game.

You need to write code that generates a random number that meets the following requirements:
- The number is a multiple of 5.
- The lowest number is 5.
- The highest number is 100.

Which two code segments will meet the requirements? Each correct answer presents a complete solution. (Choose 2.)

- [ ] from random import randrange print(randrange(0, 100, 5))
- [ ] from random import randint print(randint(0, 20) * 5)
- [x] from random import randint print(randint(1, 20) * 5)
- [x] from random import randrange print(randrange(5, 105, 5))

26.

You find errors while evaluating the following code. Line numbers are included for reference only.

average_balance = int(total_deposits / number_of_customers)

- [x] average_balance = total_deposits // number_of_customers

9.

You are developing a Python application for your school. The application must read and write data to a text file.
If the file does not exist, the application must create it. If the file contains content, the application must delete the content.

Which code segment should you use?

- [ ] open("local_data", "w")
- [ ] open("local_data", "r")
- [x] open("local_data", "w+")
- [ ] open("local_data", "r+")

10.

To test that objects a and b are the same, use: assertIs(a, b)

To test weather a value exists in a list, use assertIn(a, b)

31.

You are writing a function to perform safe division of numbers.
You need to ensure that a denominator and numerator are passed to the function and that the denominator is not zero.
Complete the code by selecting the correct code segment from each drop-down list.

```
def safe_divide(numerator, denominator):
    if numerator is None or denominator is None:
        print("A required value is missing.")
    elif denominator == 0:
        print("The denominator is zero.")
    else:
        return numerator / denominator
```

32.

You create the following program to locate a conference room and display the room name.
The program outputs "Room does not exist." even when 1 or 2 is entered.

20.

You write the following code:

```
a = 'Config1'
print(a)
b = a
a += 'Config2'
print(a)
print(b)
```

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

What is displayed after the second print? Config1Config2

What is displayed after the third print? Config1

21.

You are developing a Python program for an online product distribution company.

- [ ] employees[0:-4]
- [x] employees[:-5]

16.

You are creating a function that manipulates a number passed into the function as a float value. The function must perform the following tasks: • Take the absolute value of the float. • Remove any decimal points after the integer. Which two math functions should you use? Each correct answer is part of the solution. (Choose 2.)

- [x] math.floor(x)
- [x] math.fabs(x)
- [ ] math.fmod(x)
- [ ] math.frexp(x)

17.

The following function calculates the value of an expression that uses an exponent. Line numbers are included for reference only.

```
01 def calc_power(a, b):
02 return a**b
03 base = input("Enter the number for the base: ")
04 exponent = input("Enter the number for the exponent: ")
```

27.

Review the following program. Line numbers are for reference only:

```
def petStore(category, species, breed = "none"):
print(f"\nYou have selected an animal from the {category} category.")
if breed == "none":
print(f"The {category} you selected is a {species}")
else:
print(f"The {category} you selected is a {species} {breed}")

category = input("Enter dog, cat, or bird:")
species = input("Enter species:")
if category == "dog" or category == "cat":
breed = input("Enter breed:")
petStore(category, species, breed)
else:
petStore(category, species)

petStore(breed="Maltese", species="Canine", category="dog")
petStore("bird", species="Scarlet Macaw")
```

For each statement about the program, select True or False.

The function returns a value.
○ Yes ◉ No

The function calls at lines 12 and 15 are valid.
◉ Yes ○ No

The function calls at lines 14 and 16 will result in an error.
○ Yes ◉ No

28.

4.

A company asks you to debug some code that is causing problems with their payroll. They ask you to find the source of the payroll errors.

The following variables have been declared:

```
employee_pay = [15000, 120000, 35000, 45000]
count = 0
sum = 0
```

There are two errors in the following code:

```
for index in range(0, len(employee_pay)-1):
count += 1
sum += employee_pay[index]
average = sum/count
print("The total payroll is:", sum)
print("The average salary is:", average)
```

Which code should you use to fix the errors?

To answer, select the appropriate code segments in the answer area.

```
for index in range [(len(employee_pay)):]
count += 1
sum += employee_pay[index]
average = [sum/count]
print("The total payroll is:", sum)
print("The average salary is:",average)
```

5.

```
total = days_rented * cost_per_night
print("Cost of the DVD rental is : $", total)
```

6.

For each statement about try statements, select True or False.

A try statement can have one or more except clauses.
(•) Yes ( ) No

A try statement can have a finally clause without an except clause.
(•) Yes ( ) No

A try statement can have a finally clause and an except clause.
(•) Yes ( ) No

A try statement can have one or more finally clauses.
( ) Yes (•) No

7.

Students are attending an activity night at their school. The following function tells students where to go for their activities:

22:00 4G
IMAGE 2025-10-...

file.write ("End of listing")
file.close()

23.

Review the following code segment:

```
f = open("python.txt", "a")
f.write("This is a line of text.")
f.close()
```

For each statement about the code segment, select True or False.

A file named python.txt is created if it does not exist.
- (•) Yes
- ( ) No

The data in the file will be overwritten.
- ( ) Yes
- (•) No

Other code can open the file after this code runs.
- (•) Yes
- ( ) No

24.

Search

22:00 4G
IMAGE 2025-10-...

11.

The following function calculates the value of an expression that uses an exponent.
Line numbers are included for reference only.

```
01 def calc_power(a, b):
02 return a ** b
03 base = input("Enter the number for the base: ")
04 exponent = input("Enter the number for the exponent: ")
05 result = calc_power(base, exponent)
06 print("The result is " + result)
```

For each statement, select True or False.

The code will generate an error in line 03 and line 04.
◉ Yes ○ No

The code will generate an error in line 02 and line 05.
◉ Yes ○ No

The code will correctly output data to the console.
○ Yes ◉ No

Submitting in 0:00 minutes...

Students are attending an activity night at their school. The following function tells students where to go for their activities.

```
def roomAssignment(student, year):
"""Assign rooms to students"""
if year == 1:
print(f"\n{student.title()}, please report to room 115")
elif year == 2:
print(f"\n{student.title()}, please report to room 210")
elif year == 3:
print(f"\n{student.title()}, please report to room 320")
elif year == 4:
print(f"\n{student.title()}, please report to room 405")
elif year == 5:
print(f"\n{student.title()}, please report to room 515")
else:
print(f"\n{student.title()}, please report to room 625")
```

Which two code segments can be used to call the function? (Choose 2.)
Each correct code segment is a complete solution.

☐
```
name = input('What is your name?')
grade = 0
while grade not in (1, 2, 3, 4, 5, 6):
grade = int(input('What grade are you in (1-6)?'))
roomAssignment(name, year=grade)
```

☐
```
name = input('What is your name?')
grade = 0
while grade not in (1, 2, 3, 4, 5, 6):
grade = int(input('What grade are you in (1-6)?'))
roomAssignment(student, year)
```

☑
```
roomAssignment('Sherlock Sassafrass', 4)
```

☑
```
roomAssignment(year=6, name='Minnie George')
```

22:00 4G
IMAGE 2025-10-...

9.

You are writing a function that increments the player score in a game.

The function has the following requirements:
- If no value is specified for points, then points start at one.
- If bonus is True, then points must be doubled.

You write the following code. Line numbers are included for reference only.

```
01 def increment_score(score, bonus, points):
02 if bonus == True:
03 points = points * 2
04 score = score + points
05 return score
06 points = 5
07 score = 10
08 new_score = increment_score(score, True, points)
```

For each statement, select True or False.

Note: You will receive partial credit for each correct selection.

To meet the requirements, you must change line 01 to: def increment_score(score, bonus, points = 1).
◉ Yes ○ No

If you do not change line 01 and the function is called with only two parameters, an error occurs.
◉ Yes ○ No

Line 03 will also modify the value of the variable points declared at line 06.
○ Yes ◉ No

Search

22:00 4G
IMAGE 2025-10-...

Cheese

Bacon

15.

You develop a Python application for your company.
You want to add notes to your code so other team members will understand it.
What should you do?

- [x] Place the notes after # on any line.
- [ ] Place the notes after // on any line.
- [ ] Place the notes within /* and */ in any code segment.
- [ ] Place the notes within in any code segment.

16.

22:00 4G
IMAGE 2025-10-...

taktest.x10.mx/start_test.php?test_id=31

Submitting in 0:00 minutes...

20.

You are creating an eCommerce script that accepts input from the user and outputs the data in a comma-delimited format.

You write the following code to accept input:

```
item = input("Enter the item name: ")
sales = int(input("Enter the quantity: "))
```

The output must meet the following requirements:
- Enclose strings in double quotes.
- Do not enclose numbers in quotes or other characters.
- Separate items by commas.

You need to complete the code to meet the requirements.

Which two code segments could you use? Each correct answer presents a complete solution. (Choose 2.)

- [ ] print(item + ',' + sales)
- [ ] print("{0},{1}".format(item, sales))
- [x] print('"{0}",{1}'.format(item, sales))
- [x] print('"' + item + '"', ',', sales)

21.

Search

28.

You are writing a function that increments the player score in a game.

The function has the following requirements:
• If no value is specified for points, then points start at one.
• If bonus is True, then points must be doubled.

You write the following code. Line numbers are included for reference only:

```
01 def increment_score(score, bonus, points):
02 if bonus == True:
03 points = points * 2
04 score = score + points
05 return score
06 points = 5
07 score = 10
08 new_score = increment_score(score, True, points)
```

For each statement, select True or False.

To meet the requirements, you must change line 01 to: def increment_score(score, bonus, points = 1):
◉ Yes ○ No

If you do not change line 01 and the function is called with only two parameters, an error occurs.
◉ Yes ○ No

Line 03 will also modify the value of the variable points declared at line 06.
○ Yes ◉ No

29.

3.

You are writing a program to display special offers for My Healthy Eats Delivery. Line numbers are for reference only:

```
01 import datetime
02 dailySpecials=("Spaghetti","Macaroni and Cheese","Meatloaf","Fried Chicken")
03 weekendSpecials=("Lobster","Prime Rib","Parmesan-Crusted Cod")
04
05
06 print("My Healthy Eats Delivery")
07 if today == "Friday" or today == "Saturday" or today =="Sunday":
08 print("The weekend specials include:")
09 for item in weekendSpecials:
10 print(item)
11 else:
12 print("The weekday specials include: ")
13 for item in dailySpecials:
14 print(item)
15
16 print(f"Pricing specials change in {daysLeft} days")
```

Complete the code in lines 04, 05, and 15 by selecting the correct option from each drop-down list.

In line 04, retrieve the current date. [now = datetime.datetime.now()]

In line 05, retrieve the weekday. [today = now.strftime("%A")]

In line 15, calculate the number of days left in the week. [daysLeft = 6 - datetime.datetime.weekday()]

* Returns the current balance of the bank account\ndef get_balance():\n return balance

35.

You are creating an interactive Times Table Helper program intended for elementary school children.

You need to complete a function named times_tables that computes and displays all multiplication table results from 2 to 12, as shown below:

4 6 8 10 12 14 16 18 20 22 24
6 9 12 15 18 21 24 27 30 33 36
8 12 16 20 24 28 32 36 40 44 48
10 15 20 25 30 35 40 45 50 55 60
12 18 24 30 36 42 48 54 60 66 72
14 21 28 35 42 49 56 63 70 77 84
16 24 32 40 48 56 64 72 80 88 96
18 27 36 45 54 63 72 81 90 99 108
20 30 40 50 60 70 80 90 100 110 120
22 33 44 55 66 77 88 99 110 121 132
24 36 48 60 72 84 96 108 120 132 144

Complete the missing code segments by selecting the correct options from each drop-down list.

```
# Display time tables 2 - 12
def times_tables():
    [for col in range(2, 13):]
        [for row in range(2, 13):]
            print(row * col, end = " ")
        print()
# main
times_tables()
```

Trimite răspunsurile

Testul a fost trimis cu succes!

print("Your grade is failing.")
else:
print("Invalid grade entered.")

24.

Review the following code segment:

```
f = open("python.txt", "a")
f.write("This is a line of text.")
f.close()
```

For each statement about the code segment, select True or False.


A file named python.txt is created if it does not exist.
(•) Yes ( ) No

The data in the file will be overwritten.
( ) Yes (•) No

Other code can open the file after this code runs.
(•) Yes ( ) No

25.

22:00 4G
IMAGE 2025-10-...

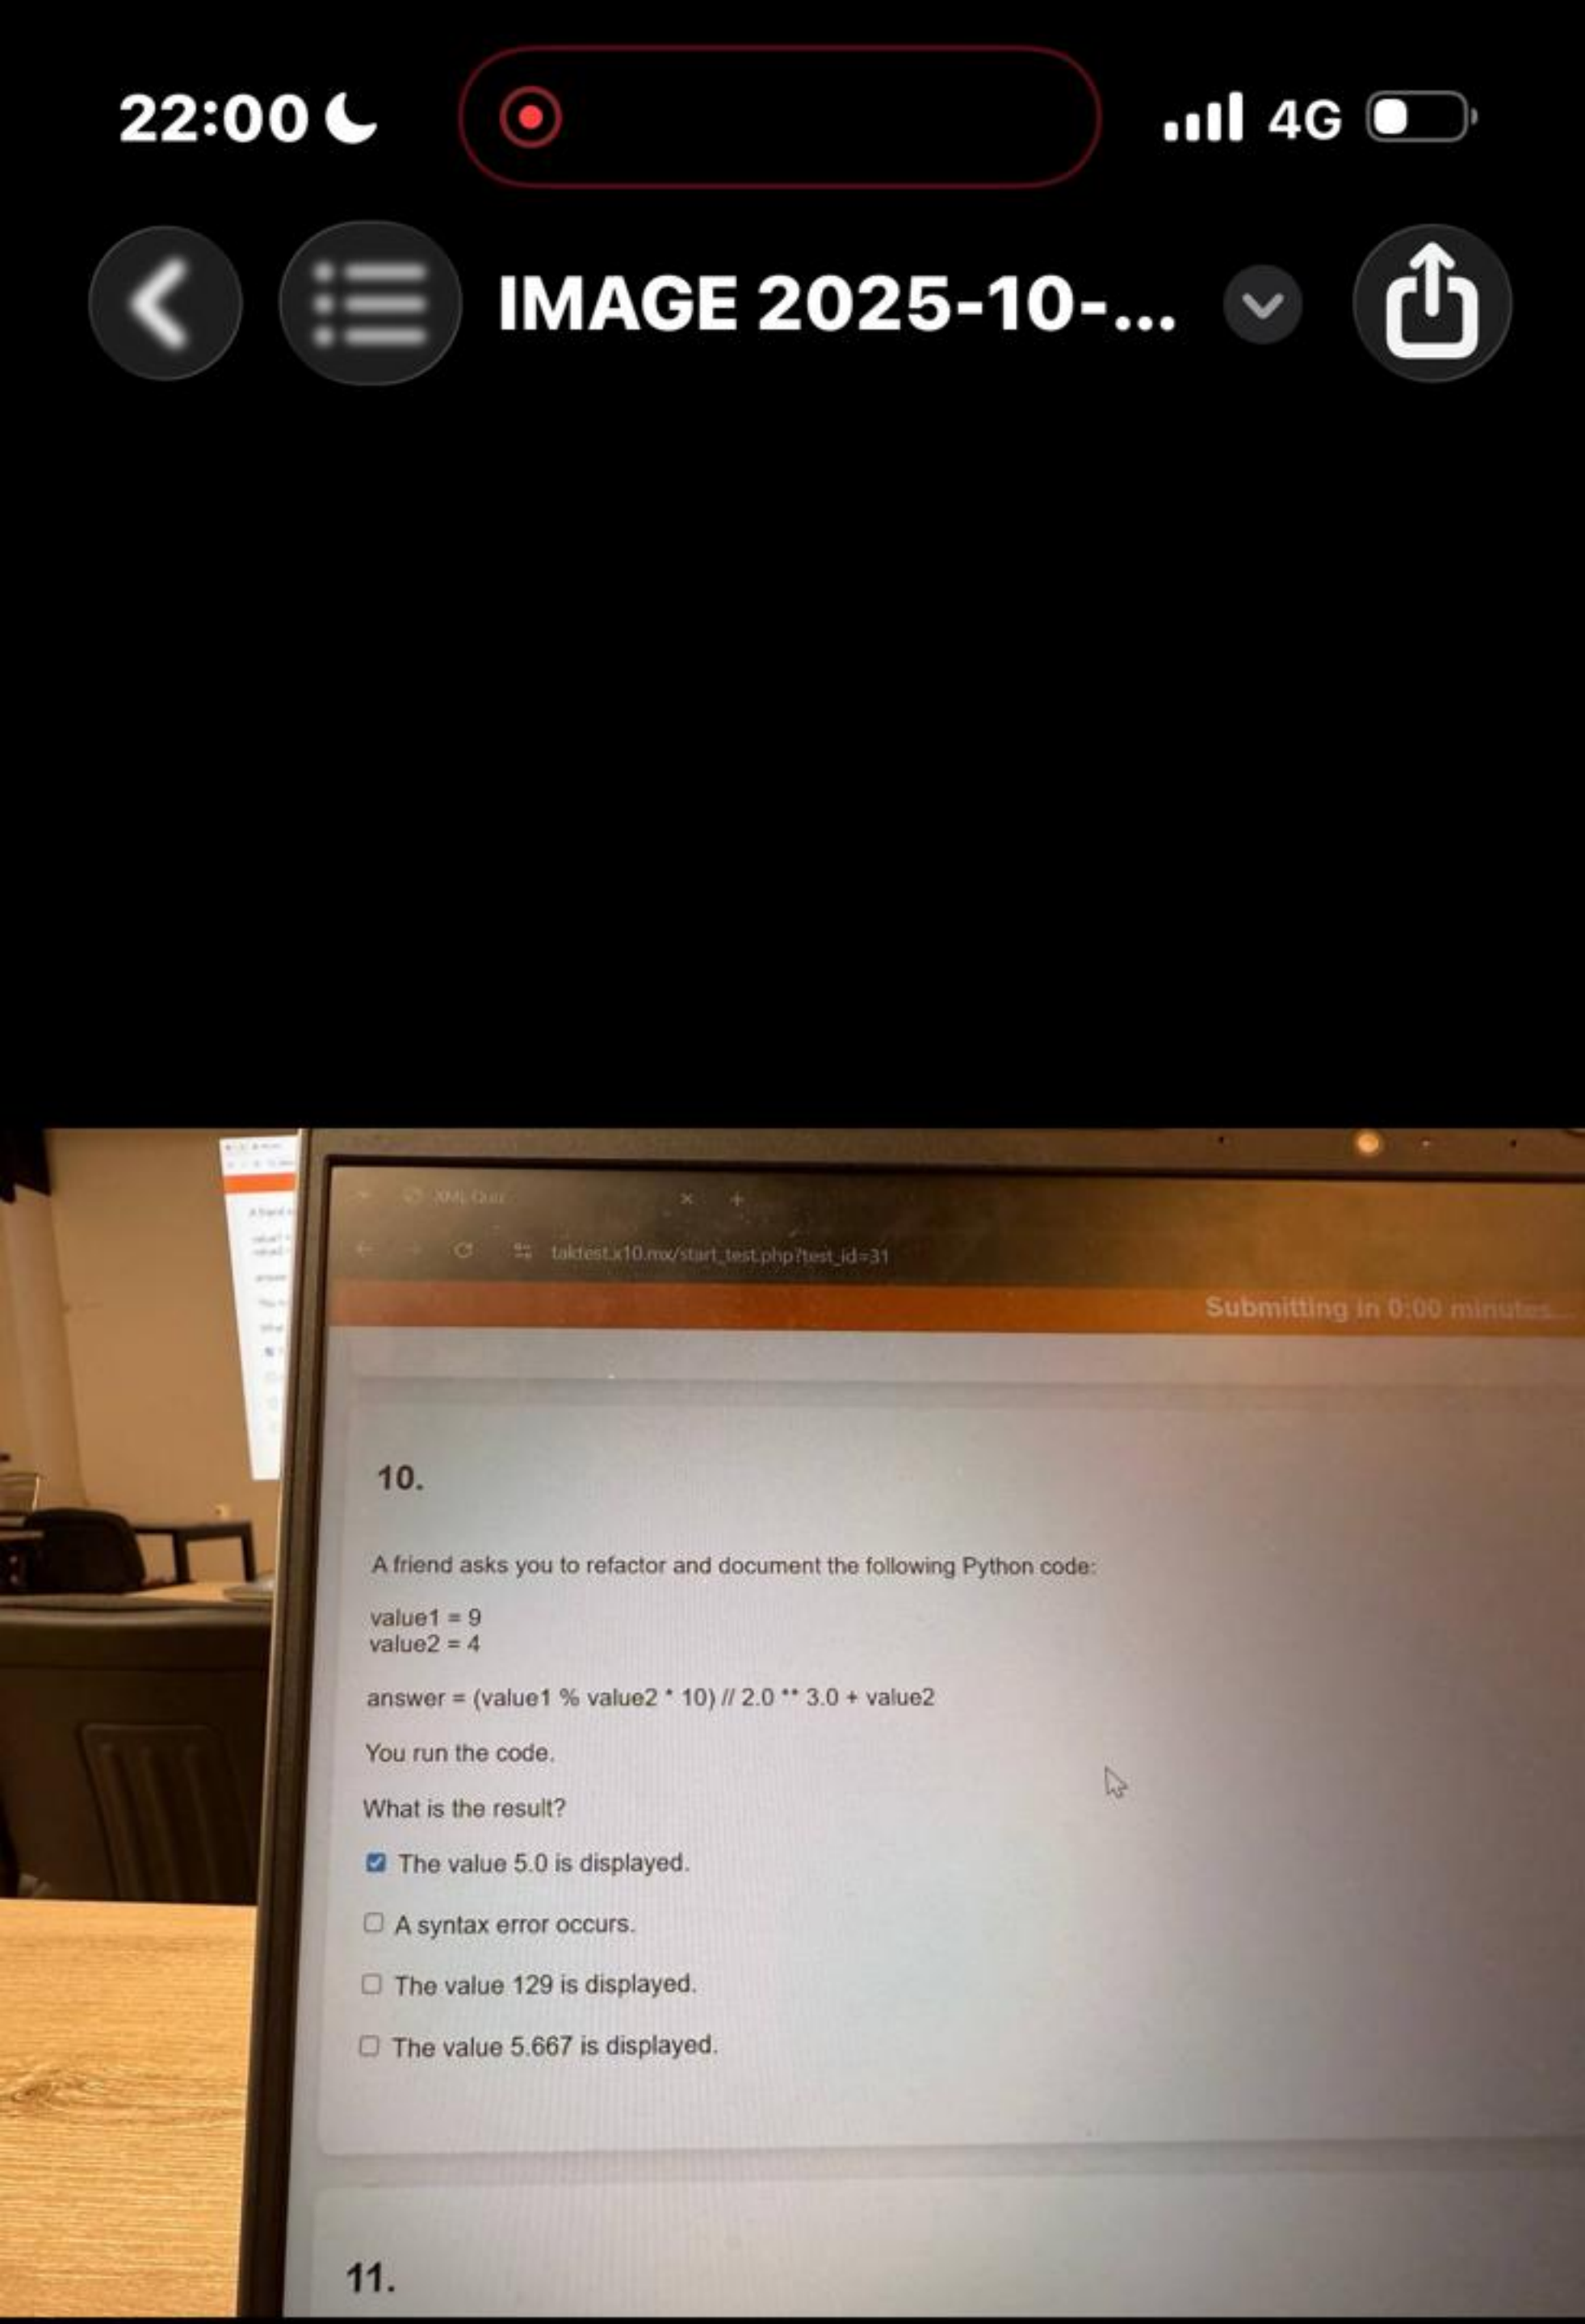

displayed after thr second print? False

What is displayed after thr third print? True

What is displayed after thr fourth print? True

19.

The Script.py file contains the following code:

```
import sys
print(sys.argv[2])
```

You run the following command:

```
python Script.py Cheese Bacon Bread
```

What is the output of the command?

- [x] Bacon
- [ ] Script.py
- [ ] Bread
- [ ] Cheese

20.

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

What is displayed after the second print? Config1Config2

What is displayed after the third print? Config1

21.

You are developing a Python program for an online product distribution company.
The program must iterate through a list of products (`productIdList`) and escape when it finds a specific product ID.
Complete the code by selecting the correct code segment from each drop-down list.

```
productIdList = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
index= 0
while (index < 10):
print(productIdList[index])
if productIdList[index] == 6:
break
else:
index += 1
```

22.

```
letter_grade = 'D'
else:
letter_grade = 'F'
```

2.

You are developing a Python application for your company.

You need to accept input from the user and print that information to the user's screen.
You start with the following code. Line numbers are included for reference only:

```
01 print("What is your name?")
02 __
03 print(name)
```

Which code should you write at line 02?

- [ ] input(name)
- [ ] name = input
- [x] name = input()
- [ ] input("name")

3.

34.

You write the following function to read a data file and print each line of the file.
Line numbers are included for reference only.

```
01 def read_file(file):
02 line = None
03 if os.path.isfile(file):
04 data = open(file,'r')
05 for line in data:
06 print(line)
```

When you run the program, you receive an error on line 03.

What is causing the error?

- [x] You need to import the os library.
- [ ] The isfile method does not accept one parameter.
- [ ] The isfile method does not exist in the path object.
- [ ] The path method does not exist in the os object.

35.