

# Applying Genetic Programming to Bytecode and Assembly

Eric Collom

Division of Science and Mathematics  
University of Minnesota, Morris  
Morris, Minnesota, USA

29 April '14,  
UMM Senior Seminar

# Outline

- 1 Evolutionary Computation
- 2 Why Evolve Bytecode and Assembly?
- 3 Java bytecode and the JVM
- 4 FINCH:Evolving Java Bytecode
- 5 Using Instruction-level Code to Automate Bug Repair
- 6 Conclusions

# Outline

# 1 Evolutionary Computation

- What is it?
- How does it work?
- Genetic Programming


## 2 Why Evolve Bytecode and Assembly?

### 3 Java bytecode and the JVM

## 4 FINCH:Evolving Java Bytecode

# What is Evolutionary Computation?

- Evolutionary Computation (EC) is a technique that is used to automate computer problem solving.
- Loosely emulates evolutionary biology

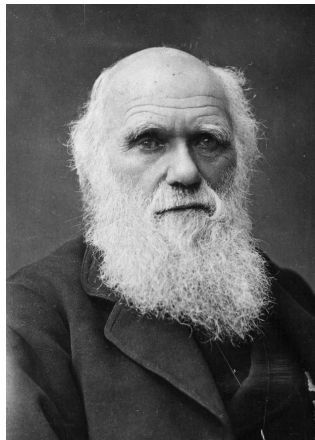


Charles Darwin

<http://tinyurl.com/lqwj3wt>


# How does it work?

- Continuous optimization
- Selection is driven by the *fitness* of individuals
- Genetic operators mimic sexual reproduction and mutation

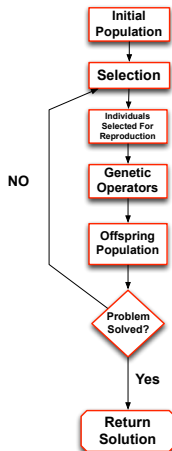


# Genetic Programming

- Genetic programming (GP) uses the EC process to evolve **programs**
- This done by using an Evolutionary Algorithm (EA)

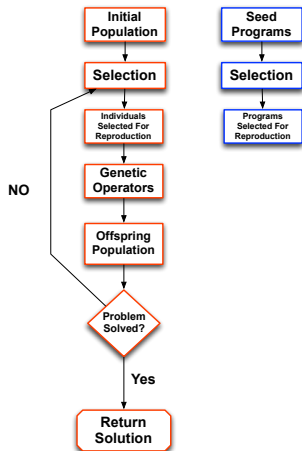


# Genetic Programming

Two genetic operators used in GP are *crossover* and *mutation*

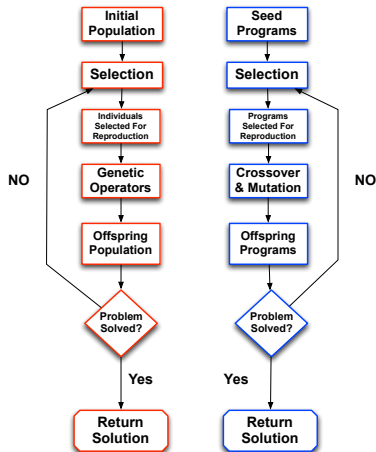


# Crossover

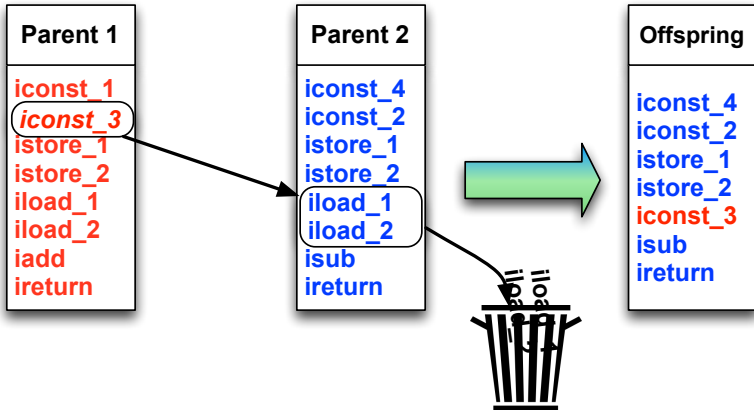

Crossover with Java Bytecode



# Mutation

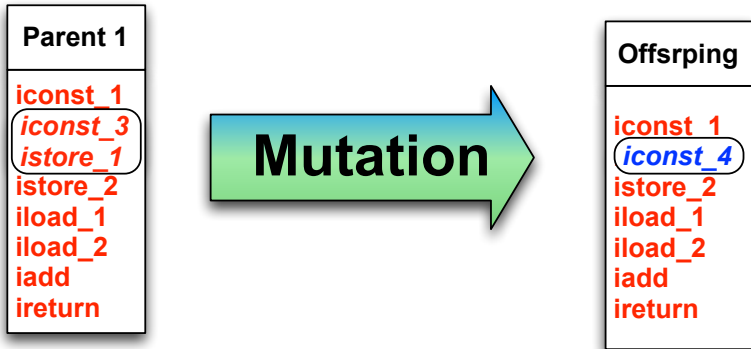

Crossover with Java Bytecode

# Outline

- 1 Evolutionary Computation
- 2 Why Evolve Bytecode and Assembly?**
  - Difficulties With Source Code
  - Instruction-Level Code
- 3 Java bytecode and the JVM
- 4 FINCH:Evolving Java Bytecode
- 5 Using Instruction-level Code to Automate Bug Repair

# Source Code Semantic Constraints

- It is difficult to apply evolution to an entire program in source code
  - Source code is made to simplify reading and writing programs
  - Source code does not represent the semantic constraints of the program.

# Syntax vs Semantics

- Syntax represents structure
- Semantics represent meaning

**Semantically Wrong:** The sun rises in the West.

**Semantically Correct:** The sun rises in the East.

# Syntax vs Semantics

Both (a) and (b) are valid syntactically. However, (b) is invalid semantically.

```
float x; int y = 7;
if(y >= 0){
    x = y;
}else{
    x = -y;
}
System.out.println(x);
```

(a)

```
float y; int x = 7;
if(y >= 0){
    y = x;
    x = y;
}
System.out.println(z);
```

(b)

# Instruction-Level Code Constraints


- Consists of smaller alphabets
- Simpler syntactically
- Fewer semantic constraints to violate

# Outline

- 1 Evolutionary Computation
- 2 Why Evolve Bytecode and Assembly?
- 3 Java bytecode and the JVM**
- 4 FINCH:Evolving Java Bytecode
- 5 Using Instruction-level Code to Automate Bug Repair
- 6 Conclusions

# Java Virtual Machine



- A frame stores data and partial results as well as return values for methods
- Each method call has a frame

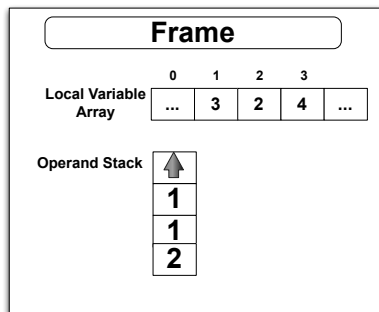



# Java bytecode and Frames

- Opcodes
- The prefix indicates type

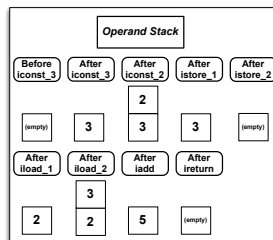

# Outline

- 1 Evolutionary Computation
- 2 Why Evolve Bytecode and Assembly?
- 3 Java bytecode and the JVM
- 4 FINCH:Evolving Java Bytecode**
  - How it Works
  - The Array Sum Problem
- 5 Using Instruction-level Code to Automate Bug Repair

# What is FINCH?

- FINCH is an EA developed by Orlov and Sipper
- It evolves Java bytecode
- It deals with semantic constraints

# Dealing With Semantic Constraints


The semantic constraints that are checked for are

- Stack and Frame Depth
- Variable Types
- Control Flow


# Dealing With Semantic Constraints

- 1 Apply crossover to two parents
- 2 Check if the offspring complies to semantic constraints
- 3 If the program passes the constraint test then it proceeds to offspring generation
- 4 If it fails the constraint check then another attempt is made with the same parents

# Bad Crossover

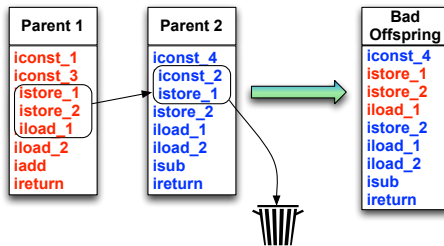

# Good Crossover

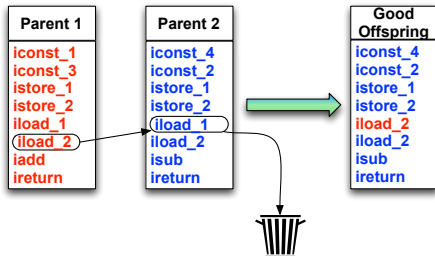

# Array Sum

- The array sum problem
  - Started with a worst case fitness seed program
  - Counted function calls to check for a non-halting state

```
int sumlistrec(List list) {  
    int sum = 0;  
    if(list.isEmpty())  
        sum *= sumlistrec(list);  
    else  
        sum += list.get(0)/2 + sumlistrec(  
            list.subList(1, list.size()));  
  
    return sum;  
}
```



# Array Sum

## Decompiled Solution

```
int sumlistrec(List list) {  
    int sum = 0;  
    if(list.isEmpty())  
        sum = sum;  
    else  
        sum += ((Integer) list.get(0)).intValue() +  
               sumlistrec(list.subList(1,list.size()));  
  
    return sum;  
}
```

# Outline

- 1 Evolutionary Computation
- 2 Why Evolve Bytecode and Assembly?
- 3 Java bytecode and the JVM
- 4 FINCH:Evolving Java Bytecode
- 5 Using Instruction-level Code to Automate Bug Repair**
  - How it Works
  - Results

# Automating Bug Repair

- Schulte, et al., automated bug repair by evolving Java bytecode and x86 assembly
- Fixed bugs in real code
- Did not check for semantic constraints

# Weighted Path

- Programs at times consist of thousands of lines of code
- Uses a weighted path due to size of programs
- The weight of a path was determined by the instructions that were executed by tests

# Weighted Path

- Test were provided that consisted of one *negative* test and multiple *positive* tests
- The negative test was used to represent the bug and check if individuals found a solution
- The positive tests were used to retain functionality

# Instruction Weight

- Each instruction executed only by the negative test was given a weight of 1.0
- An instruction executed by the negative test and atleast one positive was given a weight of 0.1
- If an instruction was not executed by the negative test case a weight of 0 was assigned

# What was debugged?

Schulte et al., were able to debug:

- Infinite loops
- Buffer overflows
- Incorrect type declarations

# Outline

- 1 Evolutionary Computation
- 2 Why Evolve Bytecode and Assembly?
- 3 Java bytecode and the JVM
- 4 FINCH:Evolving Java Bytecode
- 5 Using Instruction-level Code to Automate Bug Repair
- 6 Conclusions**



# Conclusions

- It is difficult to evolve entire programs in source code due to semantic constraints
- It is easier to deal with semantic constraints with instruction-level code
- It is feasible to not deal with semantic constraints in some situations
- It is possible to evolve small programs and fix simple bugs using instruction level code

coll0474@morris.umn.edu

# Questions?

# References



M. Orlov and M. Sipper.

Flight of the FINCH Through the Java Wilderness.  
*Evolutionary Computation, IEEE Transactions on*,  
15(2):166–182, April 2011.



E. Schulte, S. Forrest, and W. Weimer.

Automated Program Repair Through the Evolution of  
Assembly Code.

*In Proceedings of the IEEE/ACM International Conference  
on Automated Software Engineering, ASE '10*, pages  
313–316, New York, NY, USA, 2010. ACM.