

Boing Network — Testnet


👤 **Everyday users:** create a [wallet](#), request testnet BOING at [the faucet](#), then watch it on [boing.observer](#). You do **not** need to run a node.

🔧 **Developers:** public RPC is <https://testnet-rpc.boing.network/>. Smoke with `npm run preflight-rpc` from the tutorial package.

🔧 **Operators:** Part 1 (nodes + bootnodes), [TESTNET-RPC-INFRA.md](#), and §9 release tags.

Purpose: Single guide for joining the testnet, using the Testnet Portal, and the incentivized testnet program (readiness, promotion, mainnet migration).

References: [TESTNET-RPC-INFRA.md](#) (single map: testnet ops + public RPC + infra), [RUNBOOK.md](#), [READINESS.md](#), [RPC-API-SPEC.md](#), [INFRASTRUCTURE-SETUP.md](#), [VIBEMINER-INTEGRATION.md](#)

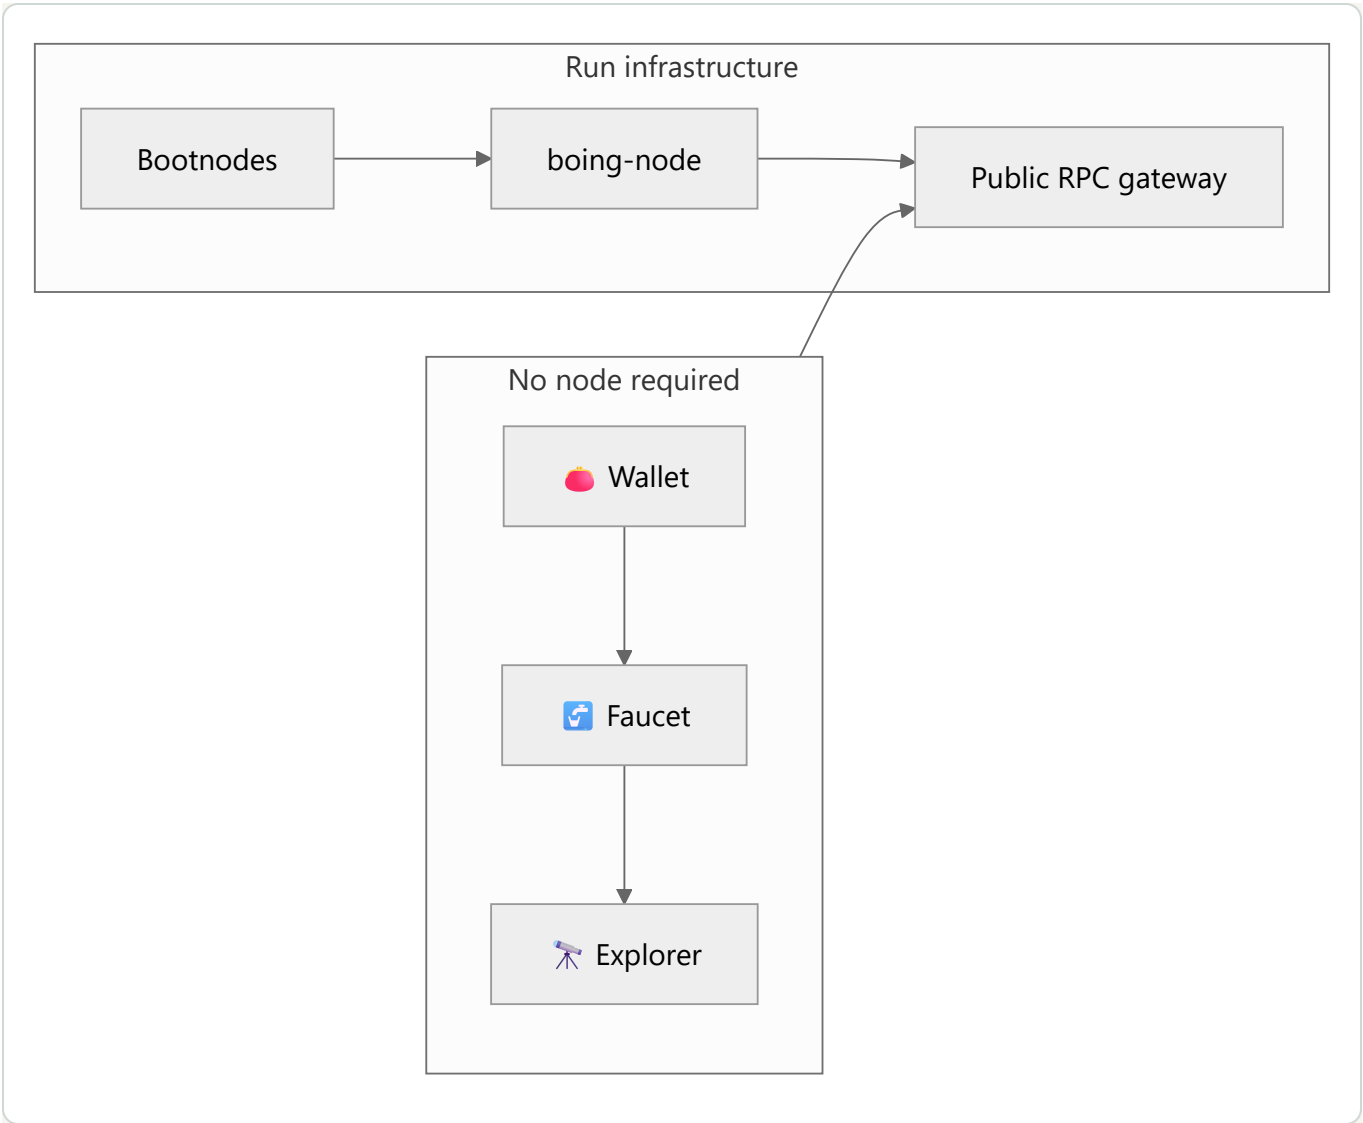

I want to...	Do this
 Use the chain today	boing.express → faucet → explorer
 Call JSON-RPC	POST https://testnet-rpc.boing.network/ with <code>boing_health</code> / <code>boing_chainHeight</code>
 One-click node	VibeMiner using GET https://boing.network/api/networks
 Join as a validator	Part 1 below: P2P listen + hosted bootnodes + faucet + Bond

Hosted bootnodes (2026-08-24): `/ip4/169.155.48.188/tcp/4001` and `/ip4/109.105.220.118/tcp/4001` . Canonical public RPC hostname is the Worker gateway — **not** a home Cloudflare Tunnel.

Table of Contents

- [Part 1 — Join Testnet](#) — Run nodes, bootnodes, faucet, single vs multi-node ([\\$9 release tags](#))
- [Part 2 — Testnet Portal](#) — Registration, dashboards, community quests
- [Part 3 — Incentivized Testnet](#) — Readiness, promotion, mainnet migration

Part 1 — Join Testnet

Run nodes on the testnet, get testnet BOING from the faucet, and join as a validator or developer.

1. Single node vs multi-node

Mode	Use case	How to run
Single node	Local dev, trying the chain alone, no P2P	Run <code>boing-node</code> without <code>--p2p-listen</code> . The node runs in isolation: it produces blocks if <code>--validator</code> , and serves RPC. No other peers.
Multi-node testnet	Public testnet: many nodes syncing and validating together	Run <code>boing-node</code> with <code>--p2p-listen</code> and <code>--bootnodes</code> . Your node joins the P2P network, syncs blocks from peers, and (if <code>--validator</code>) can produce blocks when it's the leader. For multi-validator BFT (votes over P2P), also set <code>--validators</code> / <code>BOING_VALIDATORS</code> and <code>--validator-key</code> / <code>BOING_VALIDATOR_KEY</code> (see RUNBOOK.md §8.1). Default without those flags remains single-validator.

Summary:

- **Single node** = one machine, one chain, no peer discovery. Good for "run a chain on my laptop."
- **Multi-node** = many nodes connected via P2P; they discover each other using **bootnodes** and stay in sync.

2. What are bootnodes?

Bootnodes are well-known peer addresses that new nodes **dial on startup** to join the network. Without them, a node with P2P enabled would only see peers on the same LAN (via mDNS). With bootnodes, your node can connect to the public testnet even from home.

- **Format:** Multiaddr, e.g. `/ip4/1.2.3.4/tcp/4001` (IP + port where a testnet node is listening).
- **Who runs them:** Usually the team or community; they run a node with a stable IP and publish its address.
- **How you use them:** Pass `--bootnodes /ip4/.../tcp/4001,/ip4/.../tcp/4002` when starting your node (comma-separated).

Example (replace with real testnet bootnodes):

```
./boing-node --p2p-listen /ip4/0.0.0.0/tcp/4001 \  
  --bootnodes /ip4/testnet.boing.network/tcp/4001 \  
  --validator --rpc-port 8545 --data-dir ./data
```

3. Running a single node (no P2P)

```
cargo build --release

# Full node (no block production)
./target/release/boing-node --rpc-port 8545 --data-dir ./data

# Validator (produces blocks)
./target/release/boing-node --validator --rpc-port 8545 --data-dir ./data
```

RPC: `http://127.0.0.1:8545/` . No bootnodes needed.

4. Running on the multi-node testnet

1. Build

```
cargo build --release
```

2. Start with P2P + bootnodes (use the bootnode list from [Join Testnet](#) or §6 below):

```
./target/release/boing-node \
  --p2p-listen /ip4/0.0.0.0/tcp/4001 \
  --bootnodes "<BOOTNODE_1>,<BOOTNODE_2>" \
  --validator \
  --rpc-port 8545 \
  --data-dir ./boing-data
```

3. Get testnet BOING from the [Faucet](#) (see §5).

4. Stake by submitting a `Bond` transaction via RPC (stake accounting is live). `Unbond` queues stake for a delay (`UNBONDING_DELAY_BLOCKS`); claim with `ClaimUnbond`. **Validator set for consensus:** static list via `--validators` / `BOING_VALIDATORS` by default; opt-in stake epochs with `--validator-set stake` / `BOING_VALIDATOR_SET=stake` and min stake via `BOING_STAKE_VALIDATOR_MIN_STAKE` (see [RUNBOOK.md](#) §8.1). Optional `--leader-election vrf`. On-chain slashing remains a follow-up — [NEXT-STEPS-FUTURE-WORK.md](#).

5. Faucet (testnet BOING)

Testnet nodes can expose a **faucet** so users get test BOING without mining.

5.1 RPC method: `boing_faucetRequest`

When the node is started with `--faucet-enable`, it accepts:

Method	Params	Description
<code>boing_faucetRequest</code>	<code>[hex_account_id]</code>	Send 1,000,000 testnet BOING to the given account (32-byte hex) — enough for native fees (a transfer is 1 BOING ; a token deploy is typically ~10–20 BOING) plus min validator stake (10,000). Rate limit: 1 request per 60 seconds per account .

Example (curl):

```
# Your account ID as 32-byte hex (e.g. from your wallet)
curl -s -X POST http://127.0.0.1:8545/ -H "Content-Type: application/json" \
  -d '{"jsonrpc": "2.0", "id": 1, "method": "boing_faucetRequest", "params": ["0xYOUR_32_BYTE_ACCOUNT_ID_HEX"]}'
```

Response (success):

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "ok": true,
    "amount": 1000000,
    "to": "hex_account_id",
    "message": "Check your wallet; tx is in the mempool."
  }
}
```

Notes:

- Only nodes started with `--faucet-enable` support this. **Do not use on mainnet.**
- The faucet account is funded at genesis with 10,000,000 testnet BOING; each request sends **1,000,000**.
- If you get "Faucet cooldown", wait 60 seconds and try again for the same account.

5.2 Public faucet page

The website provides a **dedicated faucet page** at boing.network/faucet (or your deployment path). Enter your account ID (hex) and request testnet BOING; the page calls the testnet RPC's `boing_faucetRequest` for you.

Testnet RPC URL: <https://testnet-rpc.boing.network/> (also on the [Testnet](#) page).

5.3 Native constant-product AMM pool (chain 6913)

The in-ledger **MVP constant-product pool** is a normal **32-byte contract** `AccountId`. Integrators should read `boing_getNetworkInfo.end_user.canonical_native_cp_pool` on public RPC (or set `REACT_APP_BOING_NATIVE_AMM_POOL` on a private chain). The hosted Fly testnet currently has **no published canonical pool** (`end_user` fields are `null`). Historical hex `0x7247ddc3...` was the previous tunnel ledger (operator-published **2026-05-21**); do not assume it exists on the current hosted chain. New pool rotations: [OPS-CANONICAL-TESTNET-NATIVE-AMM-POOL.md](#), [FLY-IO.md](#).

6. Bootnode list (testnet)

Public testnet connectivity (as of **2026-08-24**):

- **Website:** boing.network/testnet/join and [Bootnodes](#) (`website/src/config/testnet.ts` or env `PUBLIC_BOOTNODES`)
- **Networks API:** GET `https://boing.network/api/networks` — VibeMiner sync
- **RPC:** `https://testnet-rpc.boing.network/` — smoke: `npm run preflight-rpc`, `npm run verify-public-testnet-rpc`, `npm run verify-qa-alignment`
- **Explorer:** [boing.observer](#) — token/NFT metadata on `/asset/:address` and `/tokens`

Bootnode	Multiaddr	Notes
Primary	<code>/ip4/169.155.48.188/tcp/4001</code>	Fly.io boing-testnet-1 (validator + faucet)
Secondary	<code>/ip4/109.105.220.118/tcp/4001</code>	Fly.io boing-testnet-2 (full node)

Operator maintenance:

1. **Bootnodes:** Keep at least one stable P2P listener on **4001**; update the table when adding a second IP.
2. **Public RPC:** Hosted Fly nodes behind the Cloudflare Worker at `https://testnet-rpc.boing.network/` (FLY-IO.md). Publish `BOING_CANONICAL_NATIVE_*` per `tools/boing-node-public-testnet.env.example`.
3. **Genesis:** All validators must share genesis so the faucet account holds testnet BOING.
4. **Docs:** Incentive program — [Part 3](#). Critical path — [READINESS.md](#) §3.

Local multi-node dev (no public bootnodes required):

Terminal 1 (first node):

```
./target/release/boing-node --p2p-listen /ip4/127.0.0.1/tcp/4001 --validator --rpc-port 8545
```

Terminal 2 (second node, dials the first):

```
./target/release/boing-node --p2p-listen /ip4/127.0.0.1/tcp/4002 \
  --bootnodes /ip4/127.0.0.1/tcp/4001 \
  --rpc-port 8546
```

7. One-click mining / validator UI (VibeMiner)

For users who prefer a **desktop UI** instead of the terminal, Boing testnet can be used with **VibeMiner**, which provides one-click mining/validating. See [VIBEMINER-INTEGRATION.md](#) for how networks (including Boing) integrate and how to run a node via VibeMiner.

8. Incentivized testnet (summary)

When the Boing team runs an **incentivized testnet** (rewarding validators, developers, and users), the same testnet setup applies: use the published bootnodes and public RPC, get testnet BOING from the faucet, and stake to validate. For incentive rules, duration (e.g. 2–4 weeks), launch checklist, promotion, and mainnet migration, see [Part 3 — Incentivized Testnet](#) below. Check the website and announcements for the current phase and any leaderboards or reward criteria.

9. Ship a new testnet node binary (release tags)

GitHub Actions builds `release-{linux-x86_64,macos-aarch64,windows-x86_64}.zip` when you push a tag matching `testnet*` or `v*` (see `.github/workflows/release.yml`).

1. Ensure `main` has the code you want shipped.
2. Create and push an **annotated** tag (example `testnet-v0.1.8`):

```
git checkout main
git pull
git tag -a testnet-v0.1.8 -m "Testnet node: describe changes"
git push origin testnet-v0.1.8
```

3. Wait for workflow **Release binaries** to finish. For `testnet*` tags the workflow **publishes** the release immediately so `https://github.com/.../releases/download/<tag>/...` works. For `v*` tags it may create a **draft** until you click **Publish release** in GitHub → Releases.
4. If downloads return HTTP **404**, the release is usually still a **draft** or uploads are incomplete — open **Releases** and confirm the assets exist.
5. Refresh Boing website D1 listing SHAs (from repo root or `website/`):

```
node scripts/network-listings-release-sql.mjs testnet-v0.1.8
node scripts/network-listings-release-sql.mjs testnet-v0.1.8 --apply
# or: cd website && node scripts/network-listings-release-sql.mjs testnet-v0.1.8 [--apply]
```

6. Bump `BOING_TESTNET_DOWNLOAD_TAG` in `website/functions/api/networks.js` (and `BOING_ZIP_SHA` if you use URL rewrite helpers) so `GET /api/networks` returns the new `meta.boing_testnet_download_tag`. Deploy **boing.network**. Then align **VibeMiner** defaults with `meta` — `VIBEMINER-INTEGRATION.md` §6.

9.1 Release checklist (ordered)

Use when shipping a new `testnet-v0.1.x` so **VibeMiner** downloads, `GET /api/networks`, and D1 listings stay aligned.

0. CI permissions — If **Release binaries** builds zips but the release job fails with **HTTP 403**, ensure `.github/workflows/release.yml` has `permissions: contents: write`. One-off recovery: `gh release create <tag> release-*.zip` from failed run artifacts.

1. Tag and wait for assets

1. Ensure `main` contains the code you want in the zips.
2. Push an annotated tag (example `testnet-v0.1.8`):

```
git checkout main && git pull
git tag -a testnet-v0.1.8 -m "Testnet node: describe changes"
git push origin testnet-v0.1.8
```

3. Wait for **Release binaries** to finish. Confirm each asset returns **200**:

- `release-windows-x86_64.zip`
- `release-linux-x86_64.zip`
- `release-macos-aarch64.zip`

2. Pin SHA256 (Boing repo)

```
node scripts/network-listings-release-sql.mjs testnet-v0.1.8
# optional: --apply
```

Paste the three zip hashes into `website/functions/api/networks.js` — `BOING_ZIP_SHA` — and `packages/shared/src/boing-testnet-node.ts` in **VibeMiner** (`BOING_TESTNET_ZIP_SHA256_*`). Empty or non-64-hex values skip integrity verification.

3. D1 / listings

- **boing.network**: apply generated SQL (e.g. `website/migrations/2026-04-08-network-listings-boing-testnet-v0-1-8.sql`) on `boing-network-db`.
- **VibeMiner**: apply matching migration on `vibeminer-db` so listings upgrade from older tags.

4. Deploy — Deploy **boing.network** (Workers / Pages) and **VibeMiner** web/API so `/api/networks` and app defaults match.

5. Public RPC (separate) — Updating listing URLs does **not** upgrade `https://testnet-rpc.boing.network`. Deploy the same `boing-node` build behind public RPC per [PUBLIC-RPC-NODE-UPGRADE-CHECKLIST.md](#).

6. Local binary (optional) — `VIBEMINER_BOING_NODE_EXE` bypasses zip download (see VibeMiner [docs/NODE_RUNNING.md](#)).

Also: [WEBSITE-AND-DEPLOYMENT.md](#), [TESTNET-RPC-INFRA.md](#).

Part 2 — Testnet Portal

A dedicated testnet portal where participants register as **developer**, **user**, or **node operator**, with role-specific dashboards, community pages, and metrics. Replaces the standalone quests page with a unified experience. References: [DEVELOPMENT-AND-ENHANCEMENTS.md](#), [BOING-BLOCKCHAIN-DESIGN-PLAN.md](#).

2.1 Overview

The **Testnet Portal** is the single place to:

- **Sign up** — Register with a testnet account ID and choose role: **Developer**, **User**, or **Node operator**.
- **Track metrics** — Each role has a dedicated dashboard and community page with relevant metrics.
- **Qualify for rewards** — Registration and activity feed into the incentivized testnet rules (Community & Grants pool). Developers have a dedicated portion of the ecosystem pool for **successful dApps** (mainnet); testnet dev participation qualifies for grants and recognition.

Site structure:

Path	Purpose
<code>/testnet</code>	Portal landing: choose role, register, or go to dashboard
<code>/testnet/register</code>	Registration form (account ID + role + optional contact)
<code>/testnet/developers</code>	Developers community + dashboard (dApps, metrics, link to dApp incentive pool)
<code>/testnet/users</code>	Users community + dashboard (quests, faucet, feedback)
<code>/testnet/operators</code>	Node operators community + dashboard (leaderboard, uptime, blocks)

The **Join Testnet** hub is at `/testnet/join` (bootnodes, faucet, single-vs-multi). It links prominently to the portal for registration and dashboards. **Community Quests** live under **Users** at `/testnet/users/quests` (the old `/network/quests` URL redirects there).

2.2 Registration

- **Required:** Account ID (32-byte hex), Role (developer | user | node_operator).
- **Optional:** Email, Discord handle, GitHub username (for devs), node multiaddr (for operators).
- **Storage:** D1 table `portal_registrations` . One registration per account ID; role can be updated (e.g. user → developer) until testnet end.
- **API:** `POST /api/portal/register` — validate `account_id` and role; insert or update; return success. Rate limit per IP.
- **Verification:** No email verification required for Phase 1. Optional: later, link registration to on-chain identity (e.g. sign a message with the account key).

2.3 Role-Specific Dashboards & Metrics

Developers

- **Community page:** </testnet/developers> — Who's building, links to docs, SDK, CLI, and **success-based dApp incentives**.
- **Dashboard (per account):** Registered dApps; metrics placeholder (fees, tx count when indexer/RPC supports it). **Rewards:** Testnet BOING, bug bounties, dApp recognition; mainnet eligibility for grants and dApp incentive pool.

Users

- **Community page:** </testnet/users> — Quests, faucet link, feedback. **Dashboard:** Quest progress, faucet/first tx badges. **Rewards:** Faucet + quests + feedback; optional capped NFT/mainnet recognition per Incentivized Testnet Rules.

Node operators

- **Community page:** </testnet/operators> — How to run a node, bootnodes, VibeMiner, leaderboard. **Dashboard:** Validator metrics (blocks, uptime when available), leaderboard. **Rewards:** Testnet BOING (blocks) + leaderboard/uptime; mainnet allocation or NFT for top N (capped).

2.4 Data Model (D1)

```
CREATE TABLE IF NOT EXISTS portal_registrations (  
  account_id_hex TEXT PRIMARY KEY,  
  role TEXT NOT NULL,  
  email TEXT,  
  discord_handle TEXT,  
  github_username TEXT,  
  node_multiaddr TEXT,  
  created_at TEXT NOT NULL,  
  updated_at TEXT NOT NULL  
);  
  
CREATE TABLE IF NOT EXISTS portal_dapps (  
  id INTEGER PRIMARY KEY AUTOINCREMENT,  
  contract_hex TEXT NOT NULL,  
  owner_account_hex TEXT NOT NULL,  
  name TEXT,  
  registered_at TEXT NOT NULL,  
  UNIQUE(contract_hex)  
);  
CREATE INDEX IF NOT EXISTS idx_portal_dapps_owner ON portal_dapps(owner_account_hex);
```

2.5 API (Cloudflare Worker)

Method	Path	Purpose
POST	/api/portal/register	Register or update role
GET	/api/portal/me?account_id_hex=0x...	Registration + role-specific summary
GET	/api/portal/leaderboard?role=node_operator&limit=20	Leaderboard for operators
POST	/api/portal/dapps	Register a dApp (dev only)
GET	/api/quests/status?account_id_hex=0x...	Quest progress for users

2.6 Implementation Phases

Phase	Scope
Phase 0	Static portal: landing, register, community pages with placeholders.
Phase 1	D1 + API: register, me; dashboards show "Registered as X" and (users) link to quests.
Phase 2	Quest integration: quest list and progress; on-chain verification for faucet/first_tx.
Phase 3	Operator metrics: leaderboard and per-account blocks/uptime from indexer or RPC.

2.7 Community Quests

Community quests are user-facing tasks (e.g. "Use the faucet", "Send a transaction", "Share feedback") that qualify participants for testnet rewards. Completion can be **auto-verifiable on-chain** or **manual with proof**.

Quest types (examples)

Quest ID	Name	Verification	Reward tier
faucet	First drip	On-chain: faucet tx or balance > 0	Base user
first_tx	First transaction	On-chain: nonce ≥ 1 or tx in block	Base user
validator_connect	Join the network	Manual: node ID / multiaddr or screenshot	Validator
feedback	Share feedback	Manual: form + account ID	Bonus
social	Join community	Manual: Discord handle + account ID	Bonus
docs	Read and confirm	Manual: "I have read" + account ID	Base user

D1 tables (quests)

```
CREATE TABLE IF NOT EXISTS quests (
  id TEXT PRIMARY KEY,
  name TEXT NOT NULL,
  description TEXT,
  verification_type TEXT NOT NULL,
  reward_tier TEXT,
  active INTEGER DEFAULT 1,
  created_at TEXT
);

CREATE TABLE IF NOT EXISTS quest_completions (
  id INTEGER PRIMARY KEY AUTOINCREMENT,
  quest_id TEXT NOT NULL,
  account_id_hex TEXT NOT NULL,
  proof_type TEXT,
  proof_value TEXT,
  submitted_at TEXT NOT NULL,
  verified_at TEXT,
  rejected_reason TEXT,
  FOREIGN KEY (quest_id) REFERENCES quests(id)
);

CREATE INDEX IF NOT EXISTS idx_quest_completions_account ON quest_completions(account_id_hex);
CREATE INDEX IF NOT EXISTS idx_quest_completions_quest ON quest_completions(quest_id);
CREATE UNIQUE INDEX IF NOT EXISTS idx_quest_completions_unique ON quest_completions(quest_id, account_id_hex);
```

Quest API

Method	Path	Purpose
GET	<code>/api/quests</code>	List active quests
POST	<code>/api/quests/submit</code>	Submit a completion
GET	<code>/api/quests/status?account_id_hex=0x...</code>	Quest progress for account

Define incentive rules on a single **Incentivized Testnet Rules** page (e.g. `/incentivized-rules`); link from Quests and announcements.

Part 3 — Incentivized Testnet

Readiness, promotion, and mainnet migration for an incentivized testnet where validators, developers, and users can earn rewards. References: [READINESS.md](#), [RUNBOOK.md](#), [BOING-BLOCKCHAIN-DESIGN-PLAN.md](#), [BUILD-ROADMAP.md](#).

3.1 Readiness & Launch

Current Status

VibeMiner shows "no nodes" until bootnodes and public RPC are live. Complete [TESTNET-RPC-INFRA.md](#) §3 and [READINESS.md](#) §3 before announcing the incentivized testnet.

Duration

Duration	Recommendation
1 week	Soft launch or rehearsal only
2–4 weeks	Recommended for first incentivized testnet
1 month+	Consider for Phase 2 after a 2–4 week Phase 1

Technical Readiness Checklist

- ☐ Bootnodes running; multiaddrs in this doc (§6) and website
- ☐ Public RPC live; faucet enabled and tested
- ☐ Genesis and chain ID documented; multi-node sync verified
- ☐ Website testnet/faucet pages show correct RPC and bootnodes

Incentive Program Design

Role	Primary incentive	Optional mainnet link
Validators	Testnet BOING (blocks) + leaderboard/uptime	Small allocation or NFT for top N (capped)
Developers	Testnet BOING, bug bounties, dApp recognition	Grant eligibility
Users	Faucet + quests/feedback	Optional NFT (capped)

Document caps and eligibility in a single "Incentivized Testnet Rules" page.

Pre-Launch Checklist

- ☐ Incentive program documented with criteria and caps
- ☐ **Testnet Portal** live: registration (developer / user / node operator), dashboards; see [Part 2](#). Community quests live under **Users** at [/testnet/users](#).
- ☐ Bug bounty scope (if any) defined; contact for submissions
- ☐ Feedback channel live (Discord, GitHub Discussions)

- ☐ Announcement draft with start/end dates and links

Launch Day

1. Publish bootnode list and public RPC URL
2. Announce start with duration and links
3. Monitor RPC and bootnodes
4. Pin quick start in Discord/Telegram

Phase 1 Parameters (fill before launch)

Parameter	Placeholder
Start date	e.g. 2025-03-15
End date	2–4 weeks recommended
Public RPC	https://testnet-rpc.boing.network/
Validator rewards	TBD — define criteria and caps
Developer rewards	TBD — per track
Bug bounty	GitHub Security Advisories or security@

3.2 Promotion

One-liner: "Earn testnet BOING and qualify for mainnet BOING. Run a validator, build a dApp, or complete quests — rewards from our Community & Grants pool."

Channels and timeline: Teaser 2–3 weeks before; publish full rules 1 week before; announce on launch day; link testnet, faucet, rules. Promote via Twitter/X, Discord, Telegram, blog, website, VibeMiner/partners. Link to the **Testnet Portal** (/testnet) for registration and dashboards.

3.3 Mainnet Migration

Before testnet ends: Fix end date; clarify "mainnet reward" meaning; collect validator addresses, bug reports, quest submissions.

After testnet ends: Thank-you post; publish results/leaderboards; no new promises; stick to published rules.

Mainnet launch: "Same chain you tested is now mainnet"; publish "Testnet rewards claim" page; distribute mainnet BOING from Community & Grants pool per rules. Reserve a defined **Testnet Rewards** slice (e.g. X% of initial supply) from **Community & Grants (15%)**; publish the cap.

3.4 Appendix A — Reddit Post Draft (Promotion)

Use this draft to promote the incentivized testnet on Reddit. Fill in **[PLACEHOLDERS]** (dates, links) before posting. Check each subreddit's rules and use the right flair.

Title options (pick one or adapt)

- **Boing Network — Incentivized testnet is live: earn testnet BOING as validator, developer, or user (L1 with protocol-enforced QA)**
- **We're running an incentivized testnet for Boing Network — an L1 where only quality deployments are accepted on-chain. Validators, devs, and users can earn rewards.**
- **Boing Network incentivized testnet: 2–4 weeks to run a validator, build a dApp, or complete quests — rewards from our Community & Grants pool**

Post body (short)

Boing Network is an L1 blockchain built from first principles with **protocol-enforced quality assurance**. We're the first chain where only deployments that meet defined security and compliance rules are accepted on-chain. We're launching our **incentivized testnet** and invite validators, developers, and users to participate. **Validators:** Earn testnet BOING for blocks and uptime; top performers can qualify for mainnet recognition. **Developers:** Testnet BOING, bug bounties, dApp recognition, grant eligibility. **Users:** Faucet, quests, feedback; optional rewards per rules. All rewards from our **Community & Grants pool**. Timeline: Start [DATE], End [DATE], 2–4 weeks. **How to start:** boing.network/testnet/join · boing.network/faucet · Build from source or use **VibeMiner** for one-click validator. Rules & rewards: [Link to Incentivized Testnet Rules when live]. Tech: Rust, HotStuff BFT, libp2p, custom VM, Sparse Merkle. CLI: `boing init`, `boing dev`, `boing deploy`; TypeScript SDK. Questions welcome below.

Links to include

- Website: <https://boing.network>
- Join testnet: <https://boing.network/testnet/join>
- Faucet: <https://boing.network/faucet>
- GitHub: <https://github.com/Boing-Network/boing.network>
- Testnet doc: <https://github.com/Boing-Network/boing.network/blob/main/docs/TESTNET.md>

Subreddit tips

- **r/cryptocurrency / r/CryptoCurrency:** Use flair; respect karma rules; no referral links.
- **Large general forums:** Keep it technical and factual; avoid hype.
- **r/altcoin:** Focus on participation, not price.

- Post once per subreddit; answer comments; add a short comment after posting to seed discussion.

Boing Network — Authentic. Decentralized. Optimal. Sustainable.