

Meta-Analysis_TMS_Physical_Activity

IM Lahart, A Farajzadeh, MP Boisgontier

19 de August, 2026

Contents

R Markdown file set-up and packages	2
Meta-analysis	3
Import Pearson r data	3
Data file glimpse	3
Calculating z and var.z	3
Excitability (CSE): Primary analysis of using metafor::rma.mv()	3
Excitability (CSE): Converting Fisher's z back to Pearson's r	3
Excitability (CSE): Explore heterogeneity	4
Excitability (CSE): Sensitivity analysis using meta::metacor()	5
Excitability (CSE): Forest plot	5
Inhibition (SICI, LICI, cSP, iSP): Primary analysis of using metafor::rma.mv()	7
Inhibition (SICI, LICI, cSP, iSP): Converting Fisher's z back to Pearson's r	7
Inhibition (SICI, LICI, cSP, iSP): Explore heterogeneity	8
Inhibition (SICI, LICI, cSP, iSP): Sensitivity analysis using meta::metacor()	8
Inhibition (SICI, LICI, cSP, iSP): Forest plot	9
Facilitation (ICF, SICF): Primary analysis of using metafor::rma.mv()	10
Facilitation (ICF, SICF): Converting Fisher's z back to Pearson's r	11
Facilitation (ICF, SICF): Explore heterogeneity	11
Facilitation (ICF, SICF): Sensitivity analysis using meta::metacor()	12
Facilitation (ICF, SICF): Forest plot	13

Meta-analysis: Subgroup analyses	14
Inhibition measure	14
Facilitation Measure	17
Physical Activity Objectivity for Excitability	20
Physical Activity Objectivity for Inhibition	23
Physical Activity Objectivity for Facilitation	26
Meta Regressions	29
Excitability	29
Meta-regressions by proportion of women	29
Meta-regressions by age	30
Meta-regressions by study quality	31
Inhibition	31
Meta-regressions by proportion of women	31
Meta-regressions by age	32
Meta-regressions by study quality	33
Facilitation	33
Meta-regressions by proportion of women	33
Meta-regressions by age	34
Meta-regressions by study quality	34
Equivalence Testing	35
Excitability	35
Inhibition	37
Facilitation	38
Figure	40
Publication bias analysis	42
Small-study effects	42
Funnel plot	42
Egger's test	45
References	47

R Markdown file set-up and packages

Packages required: 1) dmetar 2) tidyverse 3) meta 4) metafor 5) esc 6) TOSTER

Meta-analysis

Import Pearson r data

Data file glimpse

Calculating z and var.z

Excitability (CSE): Primary analysis of using metafor::rma.mv()

```
m.cor.excitability <- rma.mv(yi = z, # pool correlation coefficients Fishers Z transformation https://b
    V = var.z, # sampling variance of Fisher's Z values: 1/(N-3), where N = the sample size
    slab = author,
    data = excitability_r,
    random = ~ 1 | author/cor_id,
    test = "t",
    method = "REML")
summary(m.cor.excitability)
```

```
##
## Multivariate Meta-Analysis Model (k = 27; method: REML)
##
##   logLik  Deviance      AIC      BIC      AICc
##   4.4134   -8.8269   -2.8269    0.9474   -1.7360
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000    18     no      author
## sigma^2.2  0.0000  0.0000    27     no  author/cor_id
##
## Test for Heterogeneity:
## Q(df = 26) = 26.0827, p-val = 0.4586
##
## Model Results:
##
## estimate      se      tval  df      pval      ci.lb  ci.ub
## -0.0259  0.0382  -0.6775  26   0.5041  -0.1044  0.0527
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Excitability (CSE): Converting Fisher's z back to Pearson's r

```
round(convert_z2r(-0.0287), 2) # point estimate
```

```
## [1] -0.03
```

```
round(convert_z2r(-0.1190), 2) # lower CI
```

```
## [1] -0.12
```

```
round(convert_z2r(0.0617), 2) # Upper CI
```


```
## [1] 0.06
```

Excitability (CSE): Explore heterogeneity

```
i2 <- var.comp(m.cor.excitability)
summary(i2)
```

```
##           % of total variance  I2
## Level 1      1.000000e+02 ---
## Level 2      4.812659e-08  0
## Level 3      5.857891e-09  0
## Total I2: 0%
```

```
plot(i2)
```

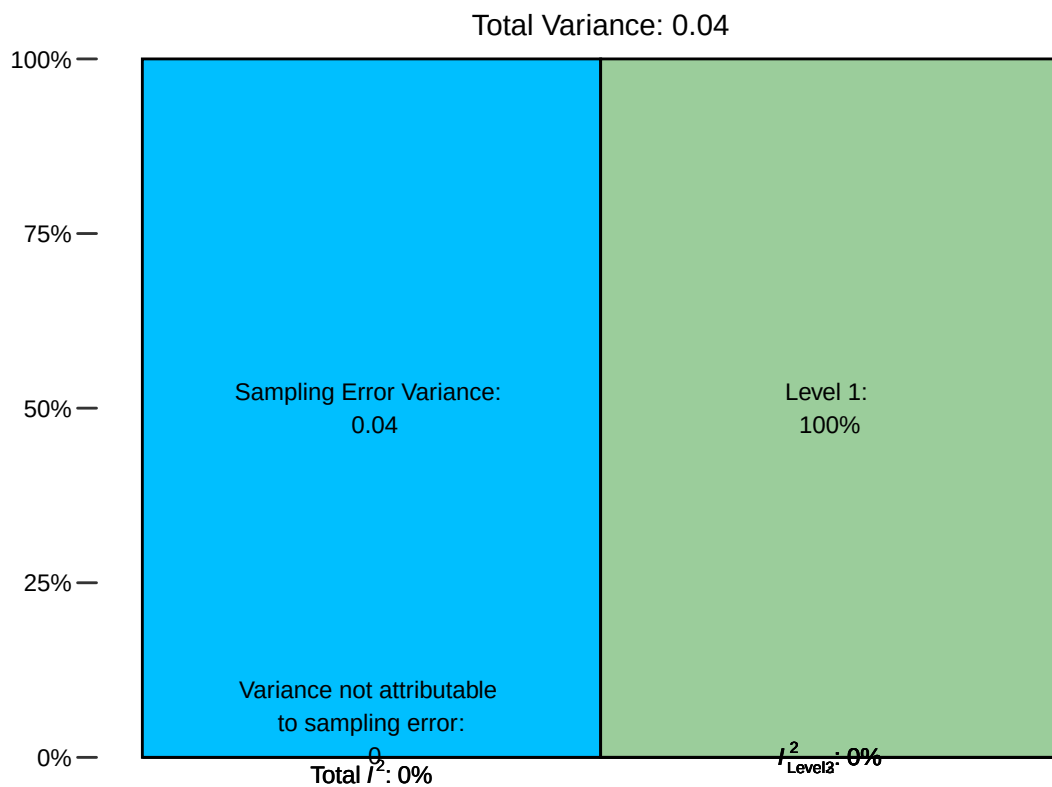

ADD TEXT

Excitability (CSE): Sensitivity analysis using meta::metacor()

```
m.excitability <- metacor(cor = cor,
  n = n,
  studlab = author,
  data = excitability_r,
  cluster = cluster,
  common = FALSE,
  random = TRUE,
  method.tau = "REML",
  method.random.ci = "HK",
  title = "Sensitivity meta-analysis using metacor")

m.excitability


## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 18
## Number of estimates: k = 27
## Number of observations: o = 766
##
##              COR              95%-CI      t p-value
## Random effects model -0.0259 [-0.1040; 0.0526] -0.68 0.5041
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 < 0.0001 [0.0000; 0.0236]; tau.1 < 0.0001 [0.0000; 0.1537] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0280]; tau.2 < 0.0001 [0.0000; 0.1675] (within cluster)
## I^2 = 0.3% [0.0%; 42.7%]; H = 1.00 [1.00; 1.32]
##
## Test of heterogeneity:
##      Q d.f. p-value
## 26.08  26  0.4586
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 26)
## - Fisher's z transformation of correlations

#Corticospinal excitability ADD TEXT
```

Excitability (CSE): Forest plot

```
forest(m.excitability,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
```

```
fs.hetstat = 10,
col.subgroup = "black",
addrows.below.overall = 2)
```

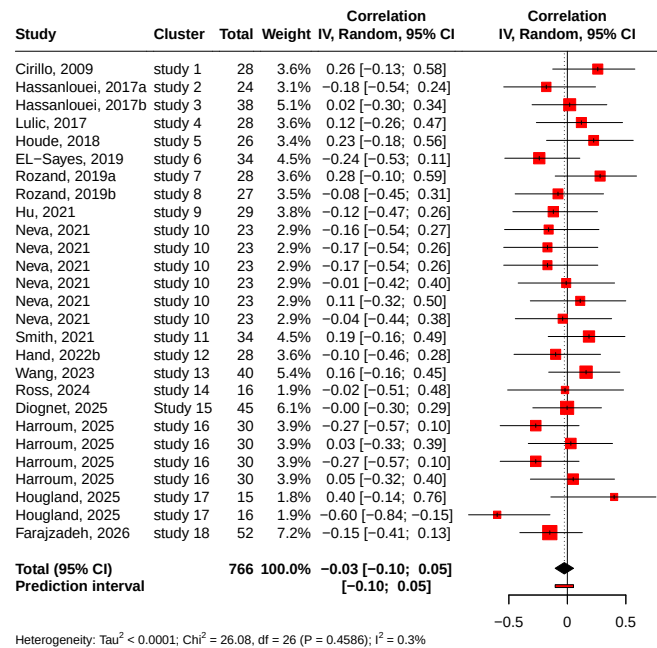

Excitability (CSE): Save plot

```
library(svglite)

svglite("forest_plot_excitability.svg", height = 7, width = 7)

forest(m.excitability,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Inhibition (SICI, LICI, cSP, iSP): Primary analysis of using metafor::rma.mv()

```
m.cor.inhibition <- rma.mv(yi = z, # pool correlation coefficients Fishers Z transformation https://bookdown.org/johnfox/metafor/
                           V = var.z, # sampling variance of Fisher's Z values: 1/(N-3), where N = the sample size
                           slab = author,
                           data = inhibition_r,
                           random = ~ 1 | author/cor_id,
                           test = "t",
                           method = "REML")
summary(m.cor.inhibition)
```

```
##
## Multivariate Meta-Analysis Model (k = 20; method: REML)
##
##      logLik  Deviance      AIC      BIC      AICc
##      1.5663   -3.1325    2.8675    5.7008    4.4675
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0181  0.1346     15     no      author
## sigma^2.2  0.0000  0.0000     20     no  author/cor_id
##
## Test for Heterogeneity:
## Q(df = 19) = 27.6145, p-val = 0.0911
##
## Model Results:
##
## estimate      se      tval  df      pval      ci.lb  ci.ub
## -0.0011  0.0548  -0.0208  19  0.9836  -0.1158  0.1135
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Inhibition (SICI, LICI, cSP, iSP): Converting Fisher's z back to Pearson's r

```
round(convert_z2r(0.0237), 2) # point estimate
```

```
## [1] 0.02
```

```
round(convert_z2r(-0.1021), 2) # lower CI
```

```
## [1] -0.1
```

```
round(convert_z2r(0.1496), 2) # Upper CI
```


```
## [1] 0.15
```

Inhibition (SICI, LICI, cSP, iSP): Explore heterogeneity

```
i2 <- var.comp(m.cor.inhibition)
summary(i2)
```

```
##           % of total variance      I2
## Level 1      6.502902e+01    ---
## Level 2      3.678491e-08      0
## Level 3      3.497098e+01  34.97
## Total I2: 34.97%
```

```
plot(i2)
```

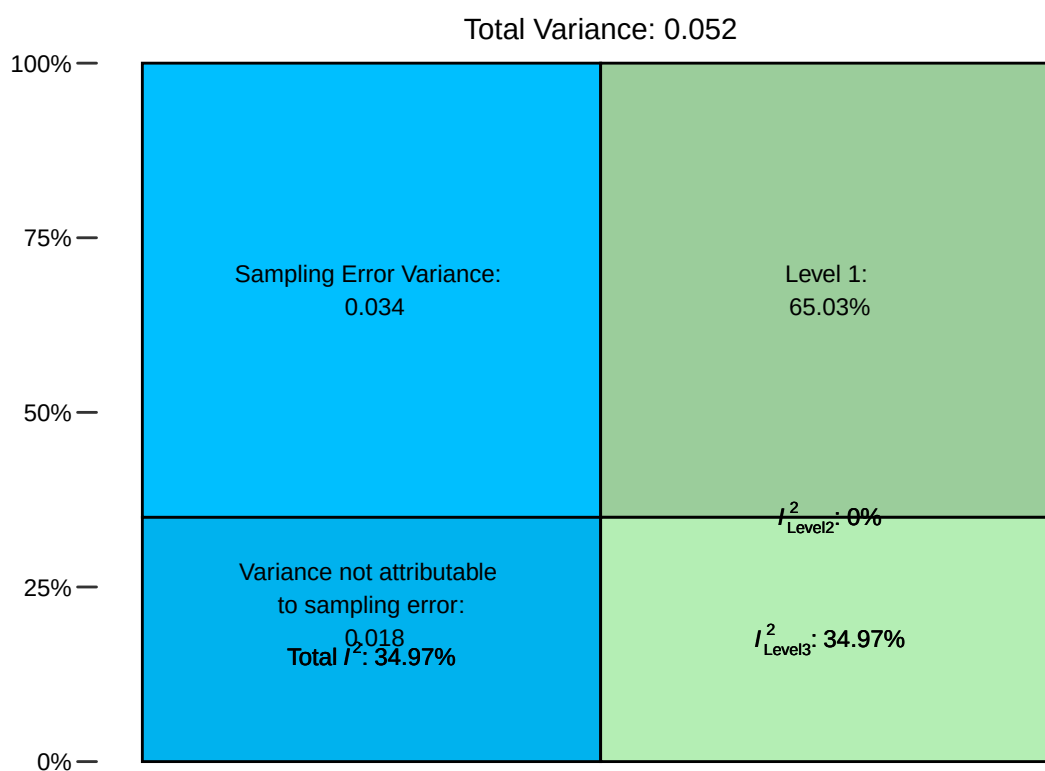

ADD TEXT

Inhibition (SICI, LICI, cSP, iSP): Sensitivity analysis using meta::metacor()

```
m.inhibition <- metacor(cor = cor,
  n = n,
  studlab = author,
  data = inhibition_r,
  cluster = cluster,
```



```

        common = FALSE,
        random = TRUE,
        method.tau = "REML",
        method.random.ci = "HK",
        title = "Sensitivity meta-analysis using metacor")

m.inhibition

## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 15
## Number of estimates: k = 20
## Number of observations: o = 656
##
##              COR              95%-CI      t p-value
## Random effects model 0.0008 [-0.1140; 0.1155] 0.01  0.9888
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 = 0.0184 [0.0000; 0.0842]; tau.1 = 0.1356 [0.0000; 0.2901] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0617]; tau.2 < 0.0001 [0.0000; 0.2484] (within cluster)
## I^2 = 31.2% [0.0%; 60.0%]; H = 1.21 [1.00; 1.58]
##
## Test of heterogeneity:
##      Q d.f. p-value
## 27.61  19  0.0911
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 19)
## - Fisher's z transformation of correlations

#Cortical inhibition ADD TEXT


```

Inhibition (SICI, LICI, cSP, iSP): Forest plot

```

forest(m.inhibition,
       layout = "Revman5",
       common = FALSE,
       xlim = c(-0.9,0.9),
       prediction = TRUE,
       fs.hetstat = 10,
       col.subgroup = "black",
       addrows.below.overall = 2)

```

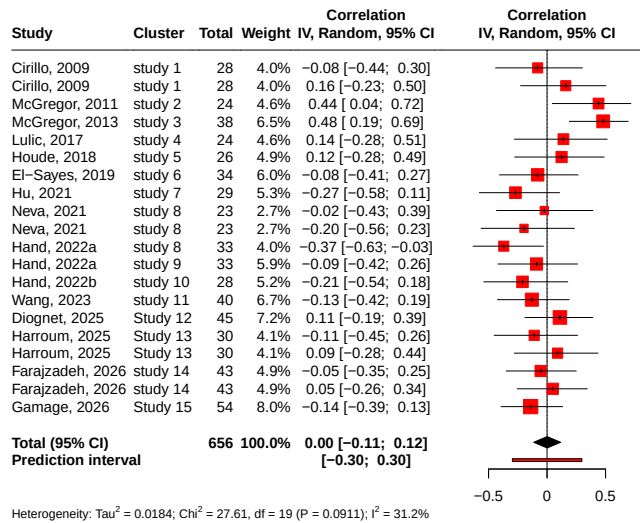

Inhibition (SICI, LICI, cSP, iSP): Save plot

```
library(svglite)

svglite("forest_plot_inhibition.svg", height = 7, width = 7)

forest(m.inhibition,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Facilitation (ICF, SICF): Primary analysis of using metafor::rma.mv()

```
m.cor.facilitation <- rma.mv(yi = z, # pool correlation coefficients Fishers Z transformation https://b
  V = var.z, # sampling variance of Fisher's Z values: 1/(N-3), where N = the sample size
  slab = author,
  data = facilitation_r,
  random = ~ 1 | author/cor_id,
  test = "t",
  method = "REML")
summary(m.cor.facilitation)
```

```
##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
##   logLik  Deviance      AIC      BIC      AICc
##   2.8964   -5.7927    0.2073    1.9021    2.8740
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000     8     no      author
## sigma^2.2  0.0000  0.0000    14     no  author/cor_id
##
## Test for Heterogeneity:
## Q(df = 13) = 12.4067, p-val = 0.4946
##
## Model Results:
##
## estimate      se      tval  df      pval      ci.lb  ci.ub
##   0.0600  0.0520  1.1540  13  0.2693  -0.0523  0.1723
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Facilitation (ICF, SICF): Converting Fisher's z back to Pearson's r

```
round(convert_z2r(0.0674), 2) # point estimate
```

```
## [1] 0.07
```

```
round(convert_z2r(-0.0449), 2) # lower CI
```

```
## [1] -0.04
```

```
round(convert_z2r(0.1797), 2) # Upper CI
```


```
## [1] 0.18
```

Facilitation (ICF, SICF): Explore heterogeneity

```
i2 <- var.comp(m.cor.facilitation)
summary(i2)
```

```
##           % of total variance  I2
## Level 1      1.000000e+02 ---
## Level 2      2.762553e-08  0
## Level 3      0.000000e+00  0
## Total I2: 0%
```

```
plot(i2)
```

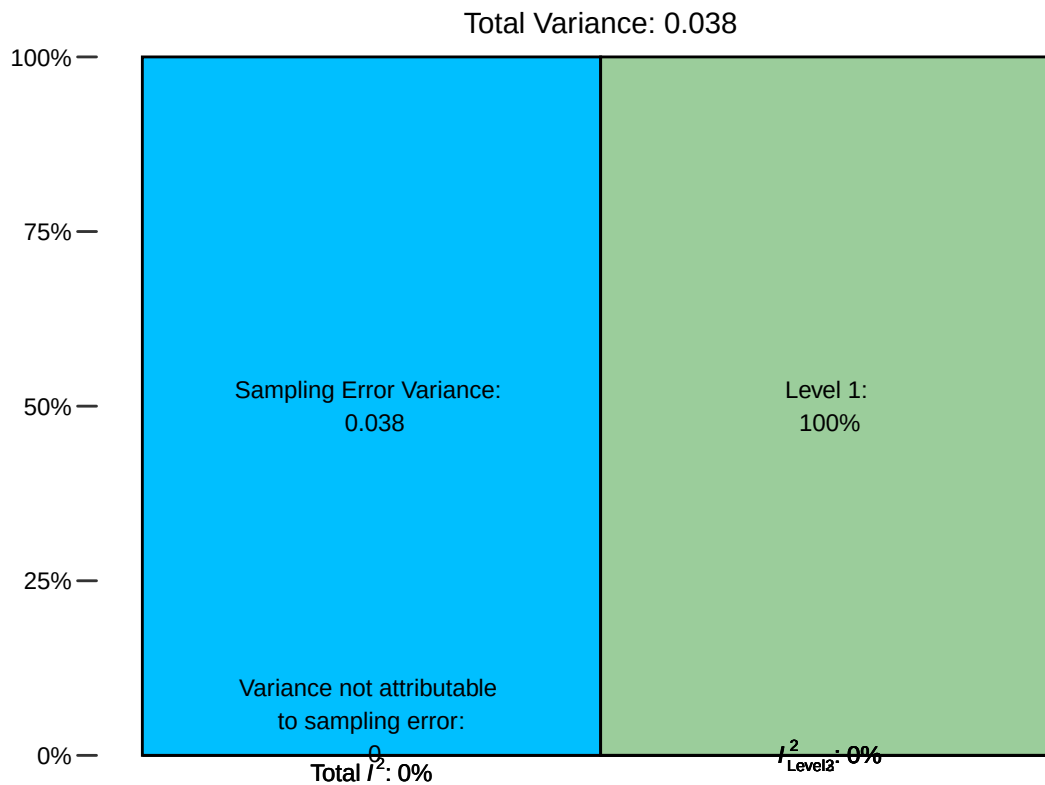

ADD TEXT

Facilitation (ICF, SICF): Sensitivity analysis using `meta::metacor()`

```
m.facilitation <- metacor(cor = cor,
  n = n,
  studlab = author,
  data = facilitation_r,
  cluster = cluster,
  common = FALSE,
  random = TRUE,
  method.tau = "REML",
  method.random.ci = "HK",
  title = "Sensitivity meta-analysis using metacor")
```

```
m.facilitation
```


```
## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 8
## Number of estimates: k = 14
```

```
## Number of observations: o = 412
##
##               COR               95%-CI      t p-value
## Random effects model 0.0599 [-0.0523; 0.1706] 1.15 0.2693
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 = 0      [0.0000; 0.0410]; tau.1 = 0      [0.0000; 0.2025] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0439]; tau.2 < 0.0001 [0.0000; 0.2095] (within cluster)
## I^2 = 0.0% [0.0%; 55.0%]; H = 1.00 [1.00; 1.49]
##
## Test of heterogeneity:
##      Q d.f. p-value
## 12.41  13 0.4946
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 13)
## - Fisher's z transformation of correlations
```

#Cortical Facilitation ADD TEXT

Facilitation (ICF, SICF): Forest plot

```
forest(m.facilitation,
       layout = "Revman5",
       common = FALSE,
       xlim = c(-0.9,0.9),
       prediction = TRUE,
       fs.hetstat = 10,
       col.subgroup = "black",
       addrows.below.overall = 2)
```

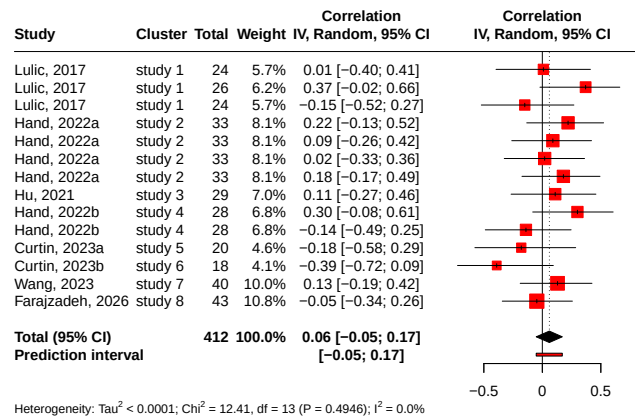

Facilitation (ICF, SICF): Save plot

```
library(svglite)

svglite("forest_plot_facilitation.svg", height = 7, width = 7)

forest(m.facilitation,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9, 0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Meta-analysis: Subgroup analyses

Inhibition measure

```
inhibition_r$inhibitory.measure <- as.factor(inhibition_r$inhibitory.measure)

inhibition_tms_subg <- rma.mv(yi = z,
  V = var.z,
  slab = author,
  data = inhibition_r,
```

```

random = ~ 1 | author/cor_id,
test = "t",
method = "REML",
mods = ~ inhibitory.measure)

summary(inhibition_tms_subg)

```

```

##
## Multivariate Meta-Analysis Model (k = 20; method: REML)
##
##   logLik  Deviance      AIC      BIC      AICc
##   7.9468  -15.8937   -3.8937    0.7419    5.4397
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000     15     no      author
## sigma^2.2  0.0000  0.0000     20     no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 16) = 8.2678, p-val = 0.9405
##
## Test of Moderators (coefficients 2:4):
## F(df1 = 3, df2 = 16) = 6.4489, p-val = 0.0045
##
## Model Results:
##
##              estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt              0.1438  0.1443   0.9961  16   0.3340   -0.1622   0.4498
## inhibitory.measureiSP    0.3602  0.1967   1.8311  16   0.0858   -0.0568   0.7772
## inhibitory.measureLICI  -0.0947  0.2141  -0.4425  16   0.6640   -0.5486   0.3591
## inhibitory.measureSICI  -0.2390  0.1518  -1.5741  16   0.1350   -0.5608   0.0829
##
## intrcpt
## inhibitory.measureiSP  .
## inhibitory.measureLICI
## inhibitory.measureSICI
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

ADD TEXT

```

inhibition_measure_type <- update(m.inhibition, subgroup = inhibitory.measure, tau.common = TRUE)
inhibition_measure_type

```

```

## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 15
## Number of estimates: k = 20
## Number of observations: o = 656
##

```

```

##                  COR          95%-CI    t p-value
## Random effects model 0.0008 [-0.1140; 0.1155] 0.01 0.9888
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 = 0.0184 [0.0000; 0.0842]; tau.1 = 0.1356 [0.0000; 0.2901] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0617]; tau.2 < 0.0001 [0.0000; 0.2484] (within cluster)
## I^2 = 31.2% [0.0%; 60.0%]; H = 1.21 [1.00; 1.58]
##
## Quantifying residual heterogeneity (with 95%-CIs):
## tau^2 = 0; tau = 0; I^2 = 0.0%; H = 1.00
##
## Test of heterogeneity:
##      Q d.f. p-value
## 27.61  19 0.0911
##
## Results for subgroups (random effects model):
##              k      COR          95%-CI    tau^2      tau      Q
## inhibitory.measure = SICI 15 -0.0949 [-0.1925; 0.0045] <0.0001 <0.0001 8.22
## inhibitory.measure = cSP   2  0.1428 [-0.1608; 0.4217] <0.0001 <0.0001 0.02
## inhibitory.measure = iSP   2  0.4652 [ 0.2172; 0.6568] <0.0001 <0.0001 0.03
## inhibitory.measure = LICI  1  0.0490 [-0.2786; 0.3664] <0.0001 <0.0001 0.00
##              I^2
## inhibitory.measure = SICI 0.0%
## inhibitory.measure = cSP  0.0%
## inhibitory.measure = iSP  0.0%
## inhibitory.measure = LICI --
##
## Test for subgroup differences (random effects model):
##              Q d.f. p-value
## Between groups 6.45   3 0.0045
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
##   (assuming common tau^2 in subgroups)
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 19)
## - Fisher's z transformation of correlations


```

ADD TEXT

```

forest(inhibition_measure_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

```

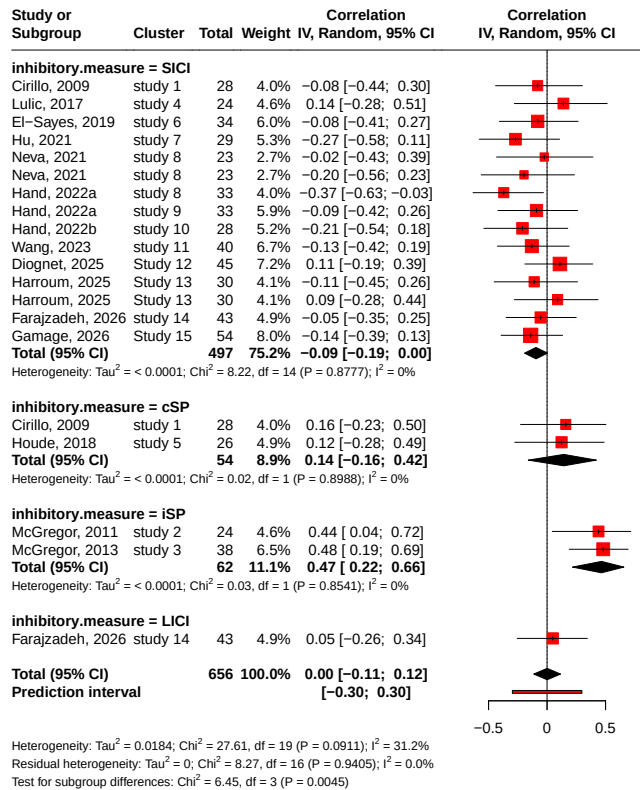Inhibition measure type: Save plot

```
library(svglite)

svglite("forest_plot_inhibition-measure.svg", height = 10, width = 14)

forest(inhibition_measure_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9, 0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Facilitation Measure

```

facilitation_r$facilitatory.measure <- as.factor(facilitation_r$facilitatory.measure)

facilitation_type <- rma.mv(yi = z,
                           V = var.z,
                           slab = author,
                           data = facilitation_r,
                           random = ~ 1 | author/cor_id,
                           test = "t",
                           method = "REML",
                           mods = ~ facilitatory.measure)

summary(facilitation_type)

```

```

##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
##      logLik  Deviance      AIC      BIC      AICc
##      2.1854   -4.3708    3.6292    5.5688    9.3435
##
## Variance Components:
##
##              estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000      8     no      author
## sigma^2.2  0.0000  0.0000     14     no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 12) = 12.4030, p-val = 0.4139
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 12) = 0.0037, p-val = 0.9525
##
## Model Results:
##
##              estimate      se    tval  df    pval    ci.lb    ci.ub
## intrcpt              0.0577  0.0644  0.8954  12  0.3882   -0.0827   0.1980
## facilitatory.measureSICF    0.0066  0.1091  0.0608  12  0.9525   -0.2311   0.2443
##
## intrcpt
## facilitatory.measureSICF
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

```

facilitation_measure_type <- update(m.facilitation, subgroup = facilitatory.measure, tau.common = TRUE)
facilitation_measure_type

```

```

## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 8
## Number of estimates: k = 14
## Number of observations: o = 412
##

```

```


##              COR              95%-CI      t p-value
## Random effects model 0.0599 [-0.0523; 0.1706] 1.15 0.2693
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 = 0      [0.0000; 0.0410]; tau.1 = 0      [0.0000; 0.2025] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0439]; tau.2 < 0.0001 [0.0000; 0.2095] (within cluster)
## I^2 = 0.0% [0.0%; 55.0%]; H = 1.00 [1.00; 1.49]
##
## Quantifying residual heterogeneity (with 95%-CIs):
## tau^2 < 0.0001; tau = 0.0003; I^2 = 3.2%; H = 1.02
##
## Test of heterogeneity:
##      Q d.f. p-value
## 12.41  13 0.4946
##
## Results for subgroups (random effects model):
##              k      COR              95%-CI      tau^2      tau      Q
## facilitatory.measure = ICF      9 0.0576 [-0.0825; 0.1955] <0.0001 <0.0001 7.48
## facilitatory.measure = SICF      5 0.0642 [-0.1268; 0.2507] <0.0001 <0.0001 4.92
##
##              I^2
## facilitatory.measure = ICF      0.0%
## facilitatory.measure = SICF 18.7%
##
## Test for subgroup differences (random effects model):
##              Q d.f. p-value
## Between groups 0.00      1 0.9525
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
##   (assuming common tau^2 in subgroups)
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 13)
## - Fisher's z transformation of correlations

```

```

forest(facilitation_measure_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

```

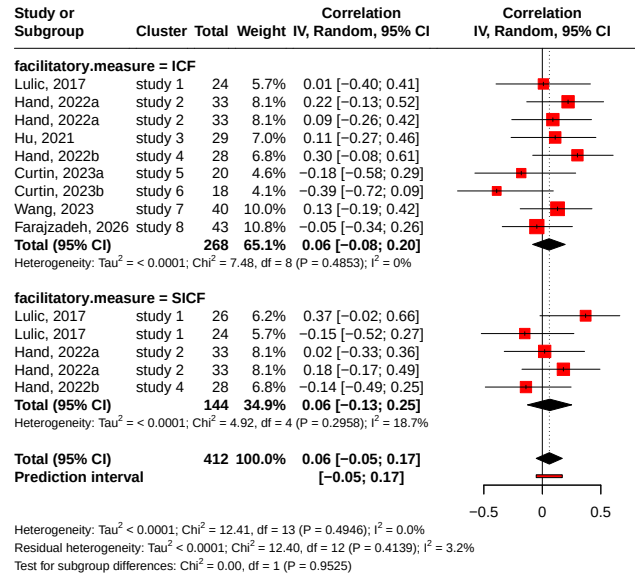

Facilitation by tms measure type: Save plot

```
library(svglite)

svglite("forest_plot_facilitation-type.svg", height = 7, width = 14)

forest(facilitation_measure_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Physical Activity Objectivity for Excitability

```
excitability_r$PA_objectivity <- as.factor(excitability_r$PA_objectivity)

excitability_PA_type <- rma.mv(yi = z,
  V = var.z,
  slab = author,
  data = excitability_r,
  random = ~ 1 | author/cor_id,
  test = "t",
  method = "REML",
```

```

      mods = ~ PA_objectivity)

summary(excitability_PA_type)

##
## Multivariate Meta-Analysis Model (k = 27; method: REML)
##
##   logLik  Deviance      AIC      BIC      AICc
##   3.7551   -7.5101    0.4899    5.3654    2.4899
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000    18    no      author
## sigma^2.2  0.0000  0.0000    27    no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 25) = 25.8722, p-val = 0.4144
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 25) = 0.2105, p-val = 0.6504
##
## Model Results:
##
##                                estimate      se      tval  df      pval
## intrcpt                        0.0029  0.0735   0.0399  25  0.9685
## PA_objectivitySelf-reported measure -0.0395  0.0861  -0.4588  25  0.6504
##                                ci.lb  ci.ub
## intrcpt                        -0.1485  0.1544
## PA_objectivitySelf-reported measure -0.2167  0.1378
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1


excitability_PA_type <- update(m.excitability, subgroup = PA_objectivity, tau.common = TRUE)
excitability_PA_type

## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 18
## Number of estimates: k = 27
## Number of observations: o = 766
##
##                                COR      95%-CI      t p-value
## Random effects model -0.0259 [-0.1040; 0.0526] -0.68 0.5041
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 < 0.0001 [0.0000; 0.0236]; tau.1 < 0.0001 [0.0000; 0.1537] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0280]; tau.2 < 0.0001 [0.0000; 0.1675] (within cluster)
## I^2 = 0.3% [0.0%; 42.7%]; H = 1.00 [1.00; 1.32]
##
## Quantifying residual heterogeneity (with 95%-CIs):

```

```
## tau^2 < 0.0001; tau = 0.0008; I^2 = 3.4%; H = 1.02
##
## Test of heterogeneity:
##      Q d.f. p-value
## 26.08  26  0.4586
##
## Results for subgroups (random effects model):
##                                     k      COR      95%-CI      tau^2
## PA_objectivity = Self-reported measure 21 -0.0365 [-0.1279; 0.0555] <0.0001
## PA_objectivity = Device-based measure   6  0.0029 [-0.1474; 0.1531] <0.0001
##                                     tau      Q      I^2
## PA_objectivity = Self-reported measure <0.0001 20.74 3.5%
## PA_objectivity = Device-based measure <0.0001  5.14 2.7%
##
## Test for subgroup differences (random effects model):
##      Q d.f. p-value
## Between groups 0.21  1  0.6504
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
##   (assuming common tau^2 in subgroups)
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 26)
## - Fisher's z transformation of correlations
```

```
forest(excitability_PA_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  print.subgroup.name = FALSE,
  addrows.below.overall = 2)
```

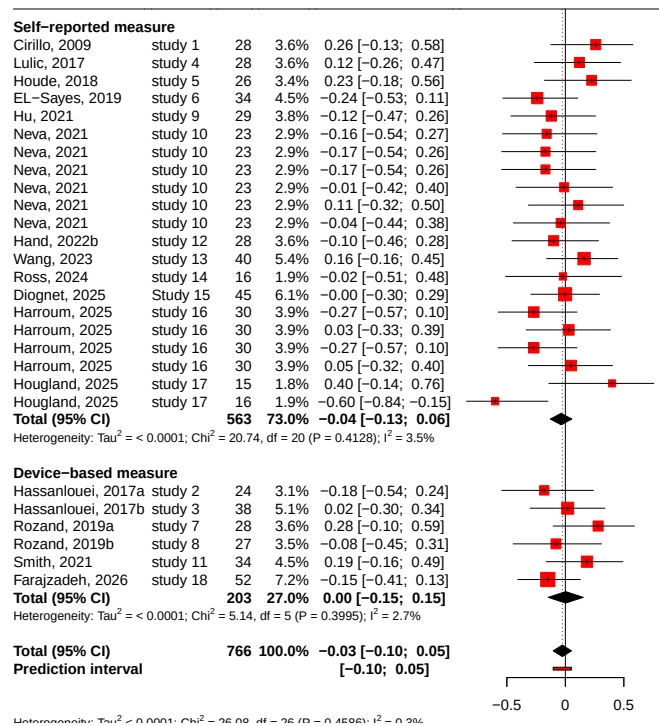

excitability by PA measure type: Save plot

```
library(svglite)

svglite("forest_plot_excitability-PA-type.svg", height = 7, width = 14)

forest(excitability_PA_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9, 0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Physical Activity Objectivity for Inhibition

```
inhibition_r$PA_objectivity <- as.factor(inhibition_r$PA_objectivity)

inhibition_PA_type <- rma.mv(yi = z,
  V = var.z,
  slab = author,
  data = inhibition_r,
```

```

random = ~ 1 | author/cor_id,
test = "t",
method = "REML",
mods = ~ PA_objectivity)

summary(inhibition_PA_type)

##
## Multivariate Meta-Analysis Model (k = 20; method: REML)
##
##   logLik  Deviance      AIC      BIC      AICc
##   1.1298  -2.2596    5.7404    9.3018    8.8173
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0239  0.1545    15     no      author
## sigma^2.2  0.0000  0.0000    20     no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 18) = 27.6100, p-val = 0.0682
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 18) = 0.0003, p-val = 0.9853
##
## Model Results:
##
##                                estimate      se      tval  df      pval
## intrcpt                        -0.0030  0.1907  -0.0158  18  0.9876
## PA_objectivitySelf-reported measure    0.0037  0.2003   0.0187  18  0.9853
##                                ci.lb    ci.ub
## intrcpt                        -0.4037  0.3977
## PA_objectivitySelf-reported measure -0.4171  0.4246
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

inhibition_PA_type <- update(m.inhibition, subgroup = PA_objectivity, tau.common = TRUE)
inhibition_PA_type

## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 15
## Number of estimates: k = 20
## Number of observations: o = 656
##
##                                COR            95%-CI      t p-value
## Random effects model 0.0008 [-0.1140; 0.1155] 0.01  0.9888
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 = 0.0184 [0.0000; 0.0842]; tau.1 = 0.1356 [0.0000; 0.2901] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0617]; tau.2 < 0.0001 [0.0000; 0.2484] (within cluster)

```



```


## I^2 = 31.2% [0.0%; 60.0%]; H = 1.21 [1.00; 1.58]
##
## Quantifying residual heterogeneity (with 95%-CIs):
## tau^2 = 0.0187; tau = 0.1367; I^2 = 34.8%; H = 1.24
##
## Test of heterogeneity:
##      Q d.f. p-value
## 27.61  19  0.0911
##
## Results for subgroups (random effects model):
##                                     k      COR      95%-CI  tau^2
## PA_objectivity = Self-reported measure 18  0.0029 [-0.1256; 0.1314] 0.0240
## PA_objectivity = Device-based measure   2 -0.0030 [-0.3837; 0.3786] 0.0240
##                                     tau      Q  I^2
## PA_objectivity = Self-reported measure 0.1549 27.39 37.9%
## PA_objectivity = Device-based measure  0.1549  0.22  0.0%
##
## Test for subgroup differences (random effects model):
##      Q d.f. p-value
## Between groups 0.00    1  0.9767
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
##   (assuming common tau^2 in subgroups)
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 19)
## - Fisher's z transformation of correlations

```

```

forest(inhibition_PA_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  print.subgroup.name = FALSE,
  addrows.below.overall = 2)

```

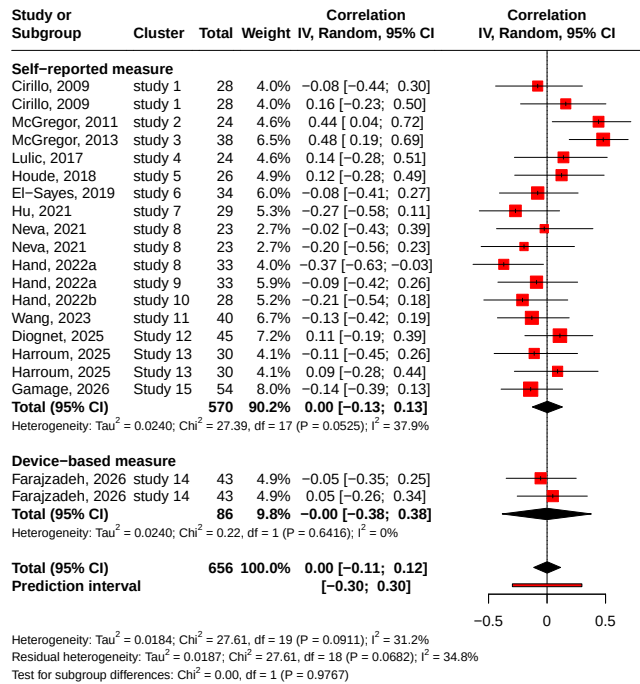

Inhibition by PA measure type: Save plot

```
library(svglite)

svglite("forest_plot_inhibition-PA-type.svg", height = 7, width = 14)

forest(inhibition_PA_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Physical Activity Objectivity for Facilitation

```
facilitation_r$PA_objectivity <- as.factor(facilitation_r$PA_objectivity)

facilitation_PA_type <- rma.mv(yi = z,
  V = var.z,
  slab = author,
  data = facilitation_r,
```

```

random = ~ 1 | author/cor_id,
test = "t",
method = "REML",
mods = ~ PA_objectivity)

summary(facilitation_PA_type)

##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
##   logLik  Deviance      AIC      BIC      AICc
##   2.2479   -4.4957   3.5043   5.4439   9.2186
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000     8    no      author
## sigma^2.2  0.0000  0.0000    14    no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 12) = 11.8930, p-val = 0.4543
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 12) = 0.5137, p-val = 0.4872
##
## Model Results:
##
##                                estimate      se      tval  df      pval
## intrcpt                      -0.0470  0.1581  -0.2975  12  0.7712
## PA_objectivitySelf-reported measure    0.1200  0.1674   0.7167  12  0.4872
##                                ci.lb    ci.ub
## intrcpt                      -0.3915  0.2975
## PA_objectivitySelf-reported measure -0.2448  0.4848
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

facilitation_PA_type <- update(m.facilitation, subgroup = PA_objectivity, tau.common = TRUE)
facilitation_PA_type

## Review:      Sensitivity meta-analysis using metacor
##
## Number of studies: n = 8
## Number of estimates: k = 14
## Number of observations: o = 412
##
##                                COR      95%-CI      t p-value
## Random effects model 0.0599 [-0.0523; 0.1706] 1.15 0.2693
##
## Quantifying heterogeneity (with 95%-CIs):
## tau^2.1 = 0      [0.0000; 0.0410]; tau.1 = 0      [0.0000; 0.2025] (between cluster)
## tau^2.2 < 0.0001 [0.0000; 0.0439]; tau.2 < 0.0001 [0.0000; 0.2095] (within cluster)

```

```


## I^2 = 0.0% [0.0%; 55.0%]; H = 1.00 [1.00; 1.49]
##
## Quantifying residual heterogeneity (with 95%-CIs):
## tau^2 < 0.0001; tau = 0.0022; I^2 = 0.0%; H = 1.00
##
## Test of heterogeneity:
##      Q d.f. p-value
## 12.41  13  0.4946
##
## Results for subgroups (random effects model):
##                                     k      COR      95%-CI      tau^2
## PA_objectivity = Self-reported measure 13  0.0728 [-0.0469; 0.1905] <0.0001
## PA_objectivity = Device-based measure   1 -0.0470 [-0.3727; 0.2890] <0.0001
##                                     tau      Q      I^2
## PA_objectivity = Self-reported measure <0.0001 11.89 0.0%
## PA_objectivity = Device-based measure <0.0001  0.00  --
##
## Test for subgroup differences (random effects model):
##      Q d.f. p-value
## Between groups 0.51  1  0.4872
##
## Details of meta-analysis methods:
## - Inverse variance method (three-level model)
## - Restricted maximum-likelihood estimator for tau^2
##   (assuming common tau^2 in subgroups)
## - Profile-Likelihood method for confidence interval of tau^2 and tau
## - Calculation of I^2 based on Q
## - Random effects confidence interval based on t-distribution (df = 13)
## - Fisher's z transformation of correlations

```

```

forest(facilitation_PA_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9,0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  print.subgroup.name = FALSE,
  addrows.below.overall = 2)

```

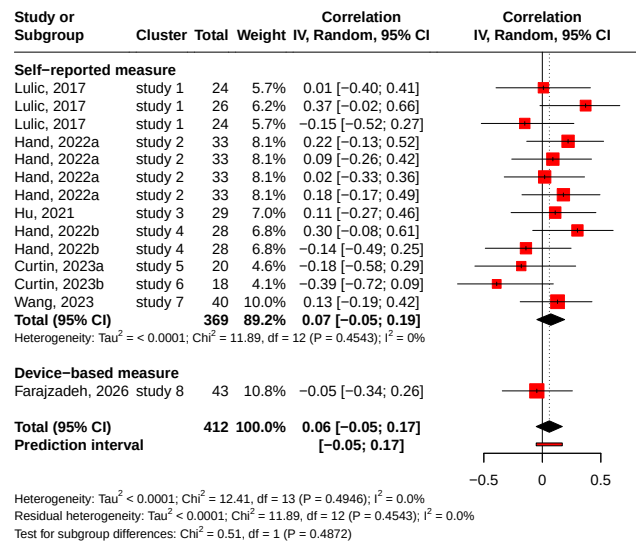

Facilitation by tms measure type: Save plot

```
library(svglite)

svglite("forest_plot_facilitation-type.svg", height = 7, width = 14)

forest(facilitation_PA_type,
  layout = "Revman5",
  common = FALSE,
  xlim = c(-0.9, 0.9),
  prediction = TRUE,
  fs.hetstat = 10,
  col.subgroup = "black",
  addrows.below.overall = 2)

dev.off()
```

```
## pdf
## 2
```

Meta Regressions

Excitability

Meta-regressions by proportion of women

```
m.cor.reg.excitability.women <- metareg(m.excitability, ~Prop_women)
```

```
## Warning: 1 row with NAs omitted from model fitting.
```

```
m.cor.reg.excitability.women
```

```
##
## Multivariate Meta-Analysis Model (k = 26; method: REML)
##
## Variance Components:
##
##          estim      sqrt  nlvls  fixed    factor
## sigma^2.1  0.0000  0.0000    17     no      .id
## sigma^2.2  0.0000  0.0000    26     no    .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 24) = 25.0431, p-val = 0.4034
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 24) = 1.0140, p-val = 0.3240
##
## Model Results:
##
##          estimate      se      tval  df      pval      ci.lb  ci.ub
## intrcpt          0.1232  0.1548   0.7964  24  0.4336  -0.1962  0.4426
## Prop_women      -0.2870  0.2850  -1.0070  24  0.3240  -0.8753  0.3013
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Meta-regressions by age

```
m.cor.reg.excitability.age <- metareg(m.excitability, ~Age)
m.cor.reg.excitability.age
```

```
##
## Multivariate Meta-Analysis Model (k = 27; method: REML)
##
## Variance Components:
##
##          estim      sqrt  nlvls  fixed    factor
## sigma^2.1  0.0000  0.0000    18     no      .id
## sigma^2.2  0.0000  0.0000    27     no    .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 25) = 24.8219, p-val = 0.4724
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 25) = 1.2608, p-val = 0.2722
##
## Model Results:
##
##          estimate      se      tval  df      pval      ci.lb  ci.ub
## intrcpt      -0.1111  0.0850  -1.3076  25  0.2029  -0.2861  0.0639
## Age           0.0026  0.0023   1.1229  25  0.2722  -0.0022  0.0073
```

```
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Meta-regressions by study quality

```
m.cor.reg.excitability.quality <- metareg(m.excitability, ~Q_score)
m.cor.reg.excitability.quality
```

```
##
## Multivariate Meta-Analysis Model (k = 27; method: REML)
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000     18     no       .id
## sigma^2.2  0.0000  0.0000     27     no  .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 25) = 25.5360, p-val = 0.4327
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 25) = 0.5467, p-val = 0.4666
##
## Model Results:
##
##           estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt      0.1966  0.3033   0.6481  25  0.5228  -0.4281  0.8214
## Q_score     -0.0155  0.0209  -0.7394  25  0.4666  -0.0586  0.0276
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Inhibition

Meta-regressions by proportion of women

```
m.cor.reg.inhibition.women <- metareg(m.inhibition, ~Prop_women)
```

```
## Warning: 1 row with NAs omitted from model fitting.
```

```
m.cor.reg.inhibition.women
```

```
##
## Multivariate Meta-Analysis Model (k = 19; method: REML)
##
## Variance Components:
##
```

```
##          estim      sqrt  nlvls  fixed    factor
## sigma^2.1 0.0216  0.1471    14    no      .id
## sigma^2.2 0.0000  0.0000    19    no    .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 17) = 25.5489, p-val = 0.0831
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 17) = 1.0090, p-val = 0.3292
##
## Model Results:
##
##          estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt      -0.0259  0.0623  -0.4161  17  0.6825  -0.1574  0.1055
## Prop_women    0.0038  0.0038   1.0045  17  0.3292  -0.0042  0.0118
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Meta-regressions by age

```
m.cor.reg.inhibition.age <- metareg(m.inhibition, ~Age)
m.cor.reg.inhibition.age
```

```
##
## Multivariate Meta-Analysis Model (k = 20; method: REML)
##
## Variance Components:
##
##          estim      sqrt  nlvls  fixed    factor
## sigma^2.1 0.0529  0.2300    15    no      .id
## sigma^2.2 0.0000  0.0000    20    no    .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 7) = 9.3363, p-val = 0.2294
##
## Test of Moderators (coefficients 2:13):
## F(df1 = 12, df2 = 7) = 0.6036, p-val = 0.7890
##
## Model Results:
##
##          estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt      -0.2769  0.3023  -0.9159   7  0.3902  -0.9916  0.4379
## Age21         0.2981  0.3708   0.8040   7  0.4478  -0.5786  1.1748
## Age23         0.0637  0.4293   0.1484   7  0.8862  -0.9514  1.0788
## Age23.1       0.3873  0.4100   0.9447   7  0.3763  -0.5821  1.3568
## Age24.4       0.3175  0.4053   0.7833   7  0.4591  -0.6409  1.2759
## Age25         0.1461  0.4139   0.3531   7  0.7344  -0.8326  1.1248
## Age27         0.2565  0.3912   0.6557   7  0.5330  -0.6686  1.1816
## Age27(6)      0.2668  0.4035   0.6612   7  0.5297  -0.6873  1.2208
## Age32         0.0375  0.3667   0.1023   7  0.9214  -0.8296  0.9047
## Age32.6       0.2739  0.3960   0.6916   7  0.5114  -0.6624  1.2101
```



```
## Age52.1      0.7998  0.4158  1.9239  7  0.0958  -0.1832  1.7829  .
## Age69       0.3929  0.3654  1.0753  7  0.3179  -0.4711  1.2569
## Age70       0.4015  0.4333  0.9266  7  0.3850  -0.6231  1.4261
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Meta-regressions by study quality

```
m.cor.reg.inhibition.quality <- metareg(m.inhibition, ~Q_score)
m.cor.reg.inhibition.quality
```

```
##
## Multivariate Meta-Analysis Model (k = 20; method: REML)
##
## Variance Components:
##
##          estim      sqrt  nlvls  fixed    factor
## sigma^2.1  0.0171  0.1307    15     no      .id
## sigma^2.2  0.0000  0.0000    20     no  .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 18) = 24.5054, p-val = 0.1392
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 18) = 2.6653, p-val = 0.1199
##
## Model Results:
##
##          estimate      se      tval  df    pval    ci.lb    ci.ub
## intrcpt   -0.5894  0.3653   -1.6135  18  0.1240   -1.3569  0.1780
## Q_score    0.0430  0.0263    1.6326  18  0.1199   -0.0123  0.0982
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Facilitation

Meta-regressions by proportion of women

```
m.cor.reg.facilitation.women <- metareg(m.facilitation, ~Prop_women)
m.cor.reg.facilitation.women
```

```
##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
## Variance Components:
##
##          estim      sqrt  nlvls  fixed    factor
```

```
## sigma^2.1  0.0000  0.0000      8    no      .id
## sigma^2.2  0.0000  0.0000     14    no  .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 12) = 11.6963, p-val = 0.4704
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 12) = 0.7104, p-val = 0.4158
##
## Model Results:
##
##           estimate      se      tval  df    pval    ci.lb    ci.ub
## intrcpt         0.1449  0.1134   1.2781  12  0.2254  -0.1021  0.3920
## Prop_women     -0.1909  0.2265  -0.8429  12  0.4158  -0.6845  0.3026
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Meta-regressions by age

```
m.cor.reg.facilitation.age <- metareg(m.facilitation, ~Age)
m.cor.reg.facilitation.age
```

```
##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
## Variance Components:
##
##           estim      sqrt  nlvls  fixed    factor
## sigma^2.1  0.0000  0.0000      8     no      .id
## sigma^2.2  0.0000  0.0000     14     no  .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 12) = 9.8929, p-val = 0.6254
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 12) = 2.5138, p-val = 0.1388
##
## Model Results:
##
##           estimate      se      tval  df    pval    ci.lb    ci.ub
## intrcpt         0.3230  0.1738   1.8580  12  0.0879  -0.0558  0.7018
## Age           -0.0093  0.0059  -1.5855  12  0.1388  -0.0221  0.0035
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Meta-regressions by study quality

```
m.cor.reg.facilitation.quality <- metareg(m.facilitation, ~Q_score)
m.cor.reg.facilitation.quality
```

```
##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
## Variance Components:
##
##      estim      sqrt  nlvls  fixed    factor
## sigma^2.1  0.0000  0.0000     8     no      .id
## sigma^2.2  0.0000  0.0000    14     no  .id/.idx
##
## Test for Residual Heterogeneity:
## QE(df = 12) = 9.8681, p-val = 0.6275
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 12) = 2.5386, p-val = 0.1371
##
## Model Results:
##
##      estimate      se      tval  df    pval    ci.lb    ci.ub
## intrcpt      0.7237  0.4198   1.7239  12  0.1104   -0.1910  1.6384
## Q_score     -0.0519  0.0326  -1.5933  12  0.1371   -0.1229  0.0191
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Equivalence Testing


Excitability

```
# Define SESOI in r
sesoi_r <- 0.1

# Convert r to Fisher's z
low_eq_z <- atanh(-sesoi_r)
high_eq_z <- atanh( sesoi_r)

TOSTmeta(
  ES = -0.0259,
  se = 0.0382,
  low_eqbound = low_eq_z,
  high_eqbound = high_eq_z,
  alpha = 0.05
)
```

Equivalence bounds -0.1 and 0.1
 Effect size = -0.026
 TOST: 90% CI [-0.089;0.037] significant
 NHST: 95% CI [-0.101;0.049] non-significant

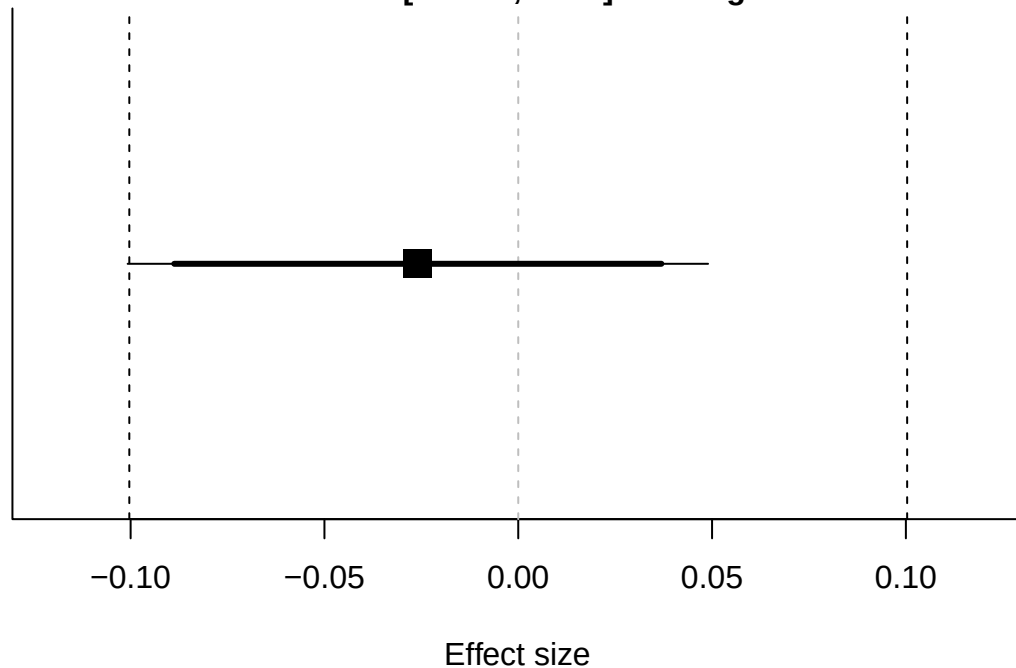

```
## TOST results:
## Z-value lower bound: 1.95    p-value lower bound: 0.026
## Z-value upper bound: -3.30   p-value upper bound: 0.0005
##
## Equivalence bounds (Cohen's d):
## low eqbound: -0.1003
## high eqbound: 0.1003
##
## TOST confidence interval:
## lower bound 90% CI: -0.089
## upper bound 90% CI: 0.037
##
## NHST confidence interval:
## lower bound 95% CI: -0.101
## upper bound 95% CI: 0.049
##
## Equivalence Test Result:
## The equivalence test was significant, Z = 1.949, p = 0.0257, given equivalence bounds of -0.100 and 0.100
##
##
## Null Hypothesis Test Result:
## The null hypothesis test was non-significant, Z = -0.678, p = 0.498, given an alpha of 0.05.
##
```


```
## NHST: don't reject null significance hypothesis that the effect is equal to 0
## TOST: reject null equivalence hypothesis
```

Inhibition

```
# Define SESOI in r
sesoi_r <- 0.1

# Convert r to Fisher's z
low_eq_z <- atanh(-sesoi_r)
high_eq_z <- atanh(sesoi_r)

TOSTmeta(
  ES = -0.0011,
  se = 0.0548,
  low_eqbound = low_eq_z,
  high_eqbound = high_eq_z,
  alpha = 0.05
)
```

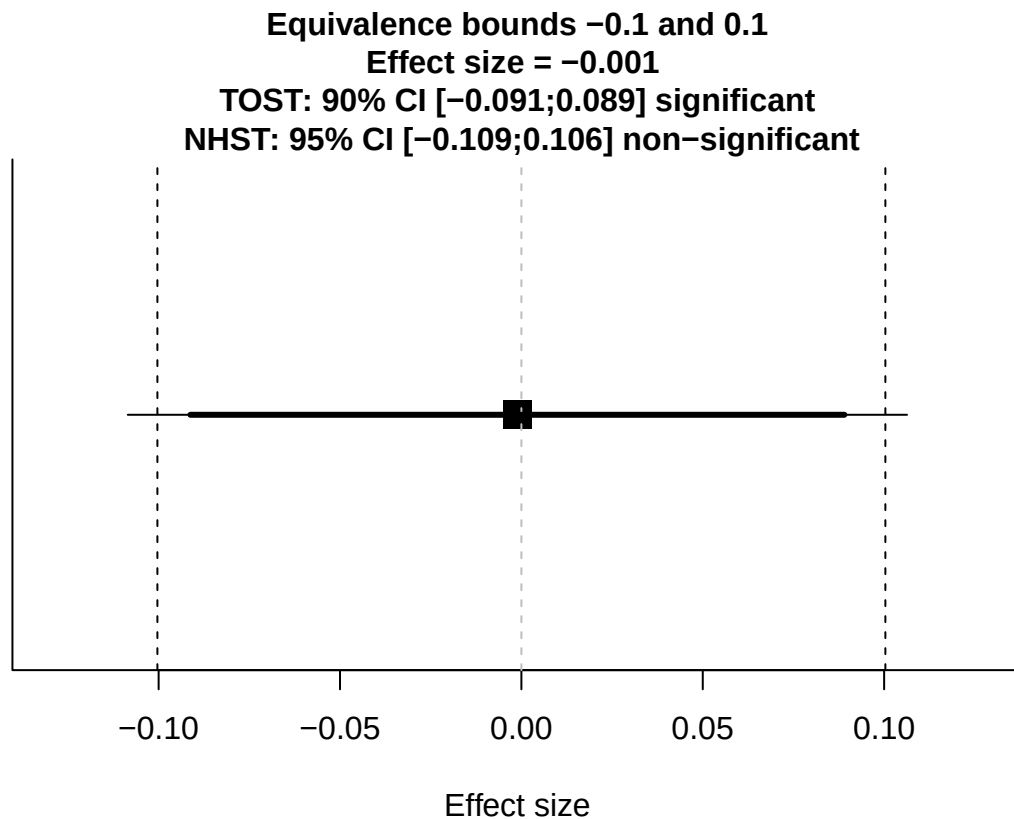

```
## TOST results:
## Z-value lower bound: 1.81    p-value lower bound: 0.035
## Z-value upper bound: -1.85   p-value upper bound: 0.032
##
```

```

## Equivalence bounds (Cohen's d):
## low eqbound: -0.1003
## high eqbound: 0.1003
##
## TOST confidence interval:
## lower bound 90% CI: -0.091
## upper bound 90% CI: 0.089
##
## NHST confidence interval:
## lower bound 95% CI: -0.109
## upper bound 95% CI: 0.106
##
## Equivalence Test Result:
## The equivalence test was significant, Z = 1.811, p = 0.0351, given equivalence bounds of -0.100 and 0.100

##

##
## Null Hypothesis Test Result:
## The null hypothesis test was non-significant, Z = -0.0201, p = 0.984, given an alpha of 0.05.

##

## NHST: don't reject null significance hypothesis that the effect is equal to 0
## TOST: reject null equivalence hypothesis

```

Facilitation


```

# Define SESOI in r
sesoi_r <- 0.1

# Convert r to Fisher's z
low_eq_z <- atanh(-sesoi_r)
high_eq_z <- atanh(sesoi_r)

TOSTmeta(
  ES = 0.0600,
  se = 0.0520,
  low_eqbound = low_eq_z,
  high_eqbound = high_eq_z,
  alpha = 0.05
)

```

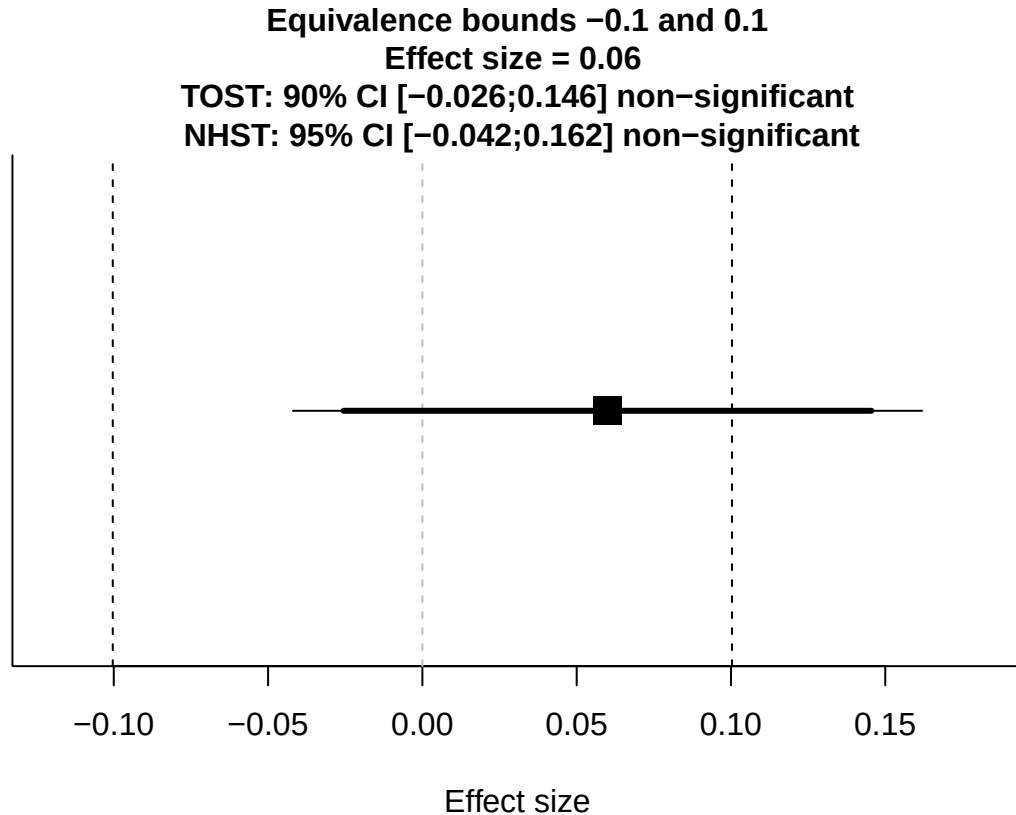

```
## TOST results:
## Z-value lower bound: 3.08    p-value lower bound: 0.001
## Z-value upper bound: -0.776 p-value upper bound: 0.219
##
## Equivalence bounds (Cohen's d):
## low eqbound: -0.1003
## high eqbound: 0.1003
##
## TOST confidence interval:
## lower bound 90% CI: -0.026
## upper bound 90% CI: 0.146
##
## NHST confidence interval:
## lower bound 95% CI: -0.042
## upper bound 95% CI: 0.162
##
## Equivalence Test Result:
## The equivalence test was non-significant, Z = -0.776, p = 0.219, given equivalence bounds of -0.100 and 0.100.
##
##
## Null Hypothesis Test Result:
## The null hypothesis test was non-significant, Z = 1.154, p = 0.249, given an alpha of 0.05.
##
```

```
## NHST: don't reject null significance hypothesis that the effect is equal to 0
## TOST: don't reject null equivalence hypothesis
```

Figure

```
library(ggplot2)

# Define SESOI
sesoi_r <- 0.1

# Equivalence bounds in Fisher's z
low_eq_z <- atanh(-sesoi_r)
high_eq_z <- atanh(sesoi_r)

# Results from the three meta-analyses
results <- data.frame(
  Measure = c("Corticospinal Excitability", "Inhibitory Processes", "Facilitatory Processes"),
  ES = c(-0.0259, -0.0011, 0.0600),
  SE = c(0.0382, 0.0548, 0.0520)
)

results$Measure <- factor(
  results$Measure,
  levels = c("Facilitatory Processes", "Inhibitory Processes", "Corticospinal Excitability")
)

results$y <- c(1.04, 1.02, 1)

# Critical values
z90 <- qnorm(0.95) # 90% CI

# Calculate CIs on Fisher's z scale and transform back to r

# 90% CI for equivalence testing
results$lower90 <- tanh(
  atanh(results$ES) - z90 * results$SE
)

results$upper90 <- tanh(
  atanh(results$ES) + z90 * results$SE
)

# Plot
ggplot(results, aes(x = ES, y = y)) +

  # 90% CI - equivalence test (thick)
  geom_errorbarh(
    aes(xmin = lower90, xmax = upper90),
    height = 0,
    linewidth = 1.6
  ) +
```



```

# Point estimate
geom_point(size = 3) +

# Equivalence bounds
geom_vline(
  xintercept = c(-sesoi_r, sesoi_r),
  linetype = "dashed"
) +

# Null value
geom_vline(
  xintercept = 0,
  linetype = "dotted"
) +


scale_y_continuous(
  breaks = results$y,
  labels = results$Measure,
  limits = c(0.98, 1.06),
  expand = c(0, 0)
) +

labs(
  x = "Pooled Correlation Coefficient (r)",
  y = NULL
) +

theme_classic(base_size = 16) +
theme(
  aspect.ratio = 0.35
) +

coord_cartesian(
  xlim = c(-0.11, 0.18)
)

```

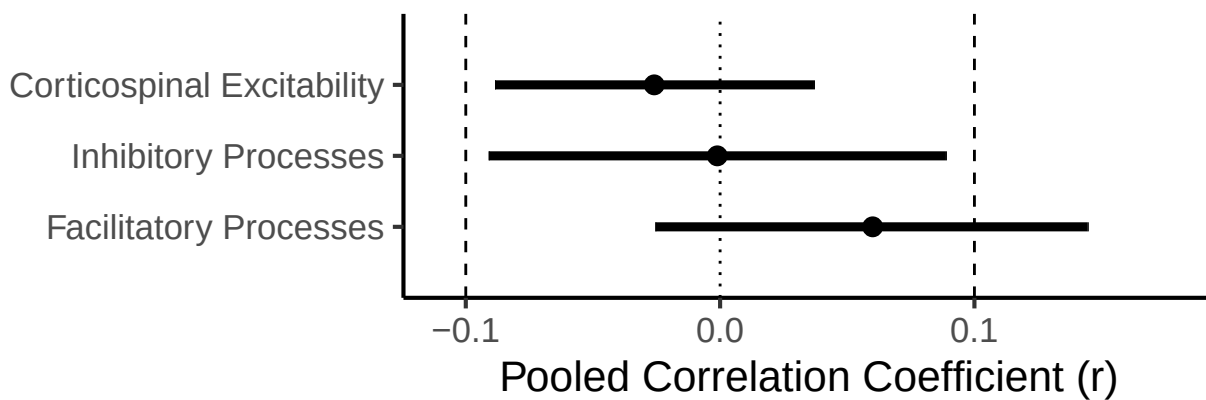

Publication bias analysis

Small-study effects

Funnel plot


```
# Define fill colors for contour
col.contour = c("gray85", "gray75")

# Funnel plot
meta::funnel(m.excitability,
             xlim = c(-1.5, 1),
             contour = c(0.95, 0.99),
             col.contour = col.contour)

# legend
legend(x = 0.5, y = 0.01,
       legend = c("p < 0.05", "p < 0.01"),
       fill = col.contour)

# title
title("Contour-Enhanced Funnel Plot (excitability)")
```

Contour-Enhanced Funnel Plot (excitability)

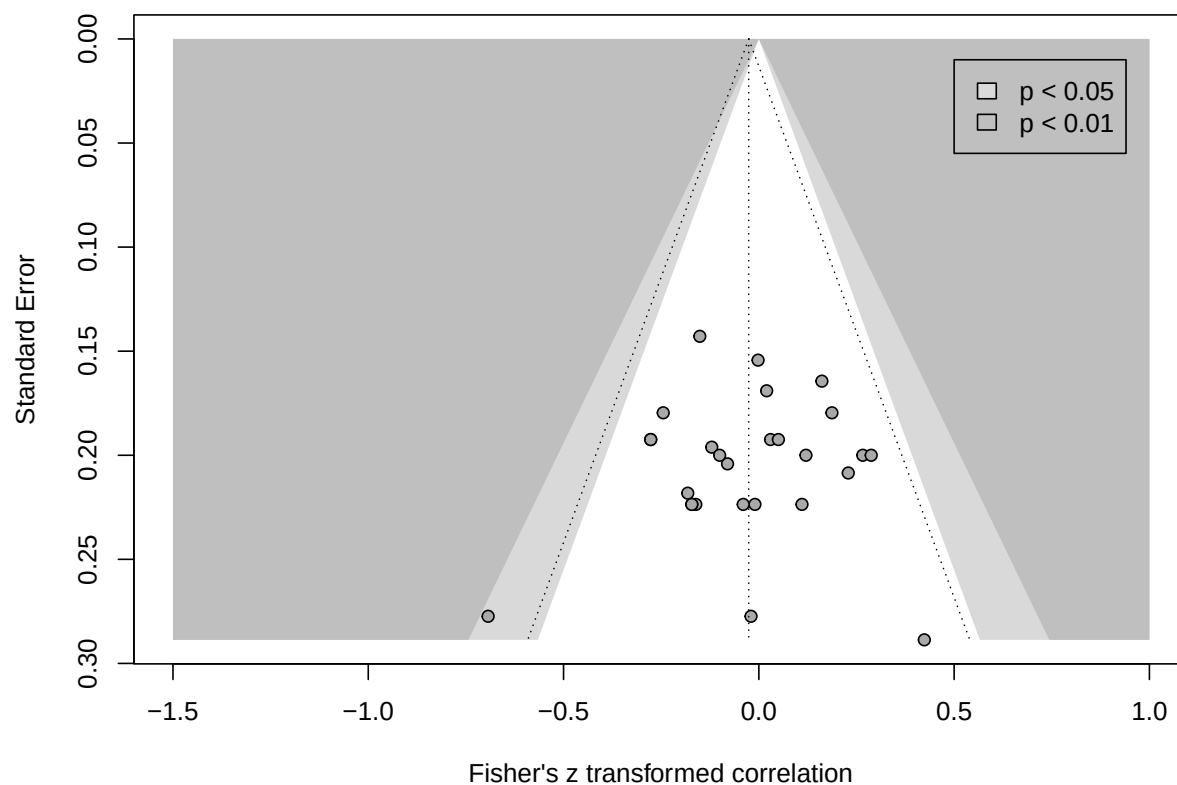


```
# Define fill colors for contour
col.contour = c("gray85", "gray75")

# Funnel plot
meta::funnel(m.inhibition,
             xlim = c(-1.5, 1),
             contour = c(0.95, 0.99),
             col.contour = col.contour)

# legend
legend(x = 0.5, y = 0.01,
       legend = c("p < 0.05", "p < 0.01"),
       fill = col.contour)

# title
title("Contour-Enhanced Funnel Plot (inhibition)")
```

Contour-Enhanced Funnel Plot (inhibition)

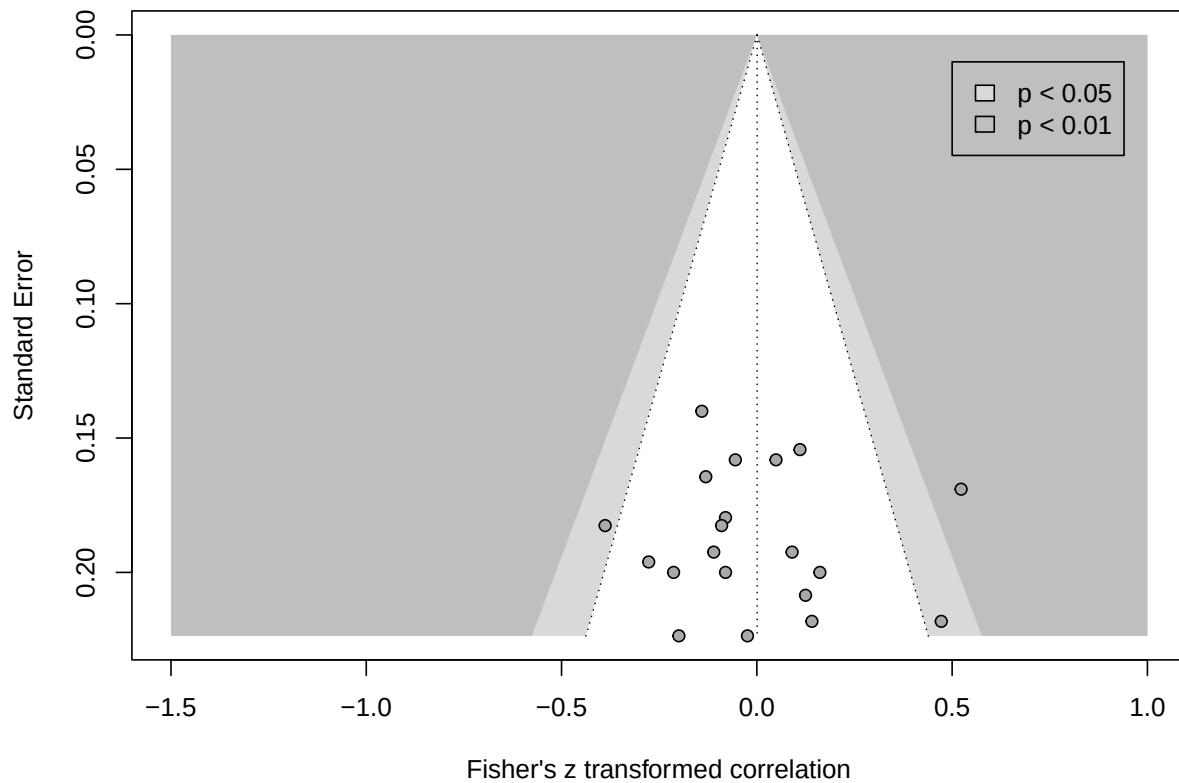

```
png(file = "Funnel Plot.png", width = 2500, height = 2000, res = 300)

# Define fill colours for contour
col.contour = c("gray85", "gray75")

# Funnel plot
meta::funnel(m.inhibition,
             xlim = c(-1.5, 1),
             contour = c(0.95, 0.99),
             col.contour = col.contour)

# legend
legend(x = 0.5, y = 0.01,
       legend = c("p < 0.05", "p < 0.01"),
       fill = col.contour)

# title
title("Contour-Enhanced Funnel Plot (tms and Physical Activity)")

dev.off()

## pdf
## 2
```

```


# Define fill colors for contour
col.contour = c("gray85", "gray75")

# Funnel plot
meta::funnel(m.facilitation,
             xlim = c(-1.5, 1),
             contour = c(0.95, 0.99),
             col.contour = col.contour)

# legend
legend(x = 0.5, y = 0.01,
       legend = c("p < 0.05", "p < 0.01"),
       fill = col.contour)

# title
title("Contour-Enhanced Funnel Plot (facilitation)")

```

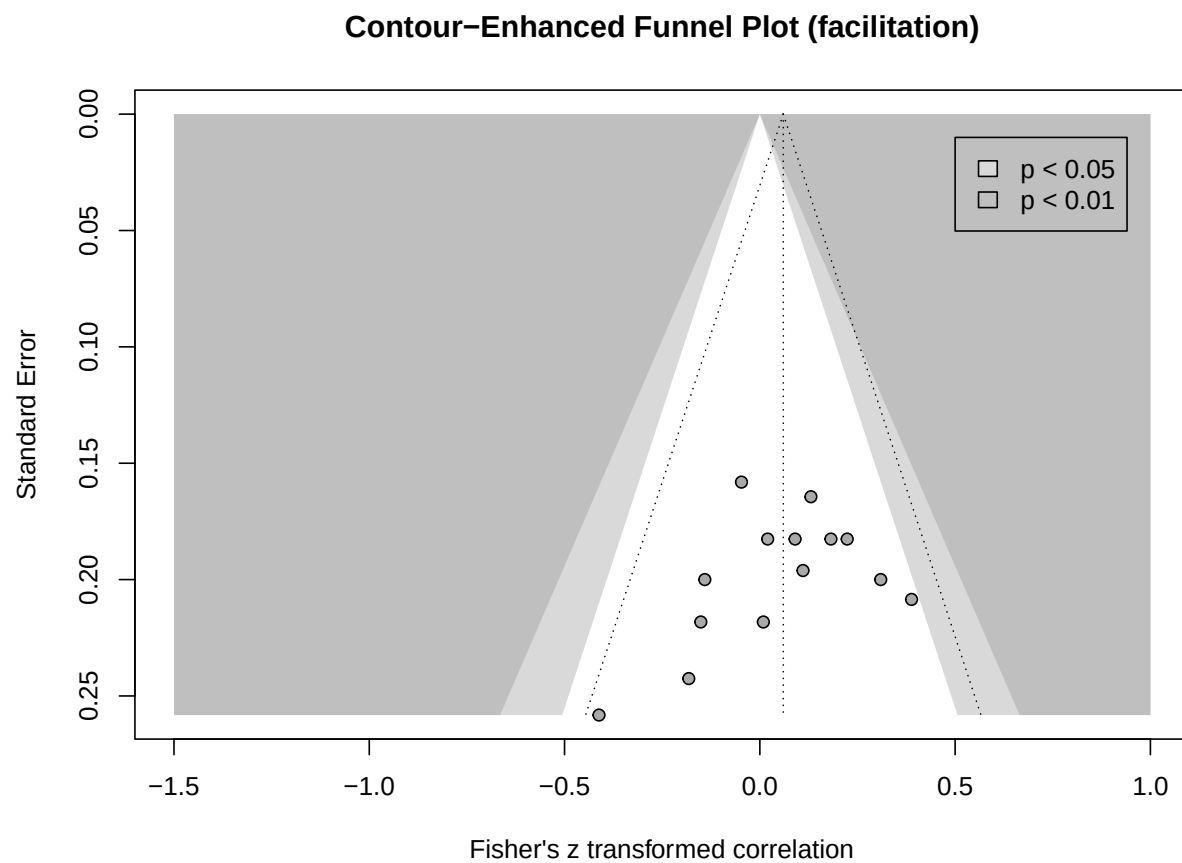

Egger's test

ADD TEXT

```
test.egger = rma.mv(z,var.z, mod = ~ sqrt(var.z), random = ~ 1 | author/cor_id, data = excitability_r,
test.egger
```

```
##
## Multivariate Meta-Analysis Model (k = 27; method: REML)
##
## Variance Components:
##
##      estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000    18    no      author
## sigma^2.2  0.0000  0.0000    27    no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 25) = 25.9966, p-val = 0.4078
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 25) = 0.0861, p-val = 0.7716
##
## Model Results:
##
##      estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt      0.0441  0.2415   0.1826  25  0.8566   -0.4534   0.5416
## sqrt(var.z)  -0.3570  1.2166  -0.2934  25  0.7716   -2.8627   2.1487
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
test.egger = rma.mv(z,var.z, mod = ~ sqrt(var.z), random = ~ 1 | author/cor_id, data = inhibition_r, t
test.egger
```

```
##
## Multivariate Meta-Analysis Model (k = 20; method: REML)
##
## Variance Components:
##
##      estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0222  0.1491    15    no      author
## sigma^2.2  0.0000  0.0000    20    no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 18) = 27.4910, p-val = 0.0702
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 18) = 0.1178, p-val = 0.7354
##
## Model Results:
##
##      estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt     -0.1458  0.4286  -0.3401  18  0.7377   -1.0463   0.7547
## sqrt(var.z)   0.7925  2.3093   0.3432  18  0.7354   -4.0592   5.6442
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
test.egger = rma.mv(z,var.z, mod = ~ sqrt(var.z), random = ~ 1 | author/cor_id, data = facilitation_r,
test.egger
```

```
##
## Multivariate Meta-Analysis Model (k = 14; method: REML)
##
## Variance Components:
##
##          estim      sqrt  nlvls  fixed      factor
## sigma^2.1  0.0000  0.0000      8      no      author
## sigma^2.2  0.0000  0.0000     14      no  author/cor_id
##
## Test for Residual Heterogeneity:
## QE(df = 12) = 10.3818, p-val = 0.5825
##
## Test of Moderators (coefficient 2):
## F(df1 = 1, df2 = 12) = 2.0249, p-val = 0.1802
##
## Model Results:
##
##          estimate      se      tval  df      pval      ci.lb      ci.ub
## intrcpt          0.6294  0.4035   1.5598  12  0.1448   -0.2498   1.5085
## sqrt(var.z)     -2.9517  2.0743  -1.4230  12  0.1802   -7.4712   1.5678
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

#Publication Bias ADD TEXT
```

References

- Cohen J. Statistical power analysis for the behavioral sciences. 2nd ed.; 1988.
- Egger M, Davey Smith G, Schneider M, Minder C. Bias in meta-analysis detected by a simple, graphical test. *BMJ*. 1997;315(7109):629-634. <https://doi.org/10.1136/bmj.315.7109.62>
- Higgins JPT, Thompson SG. Quantifying heterogeneity in a meta-analysis. *Stat Med*. 2002;21(11):1539-1558. <https://doi.org/10.1002/sim.1186>
- Knapp G, Hartung J. Improved tests for a random effects meta-regression with a single covariate. *Stat Med*. 2003;22(17):2693-2710. <https://doi.org/10.1002/sim.1482>
- R Core Team. R: A language and environment for statistical computing [Computer software]. Version 4.3.1. Vienna, Austria: Foundation for Statistical Computing; 2023. <https://www.r-project.org>
- Schwarzer G. Meta: General package for meta-analysis [R package]. Version 6.5-0; 2023. <https://cran.r-project.org/web/packages/meta/meta.pdf>
- Simonsohn U, Nelson LD, Simmons JP. P-curve: A key to the file-drawer. *J Exp Psychol Gen*. 2014;143(2):534-547. <http://doi.org/10.1037/a0033242>
- Viechtbauer W. Bias and efficiency of meta-analytic variance estimators in the random-effects model. *J Educ Behav Stat*. 2005;30(3):261-293. <https://doi.org/10.3102/10769986030003261>

- Viechtbauer W. Conducting meta-analyses in R with the metafor package. J Stat Softw. 2010;36(3):1-48. <https://doi.org/10.18637/jss.v036.i03>
- Viechtbauer W. Metafor: Meta-analysis package for R [R package]. Version 4.2-0; 2023. <https://cran.r-project.org/web/packages/metafor/metafor.pdf>
- Viechtbauer, “W. (2023). Metafor: Meta-Analysis Package for R (Version 4.2-0) [R package]. <https://cran.r-project.org/web/packages/metafor/metafor.pdf>