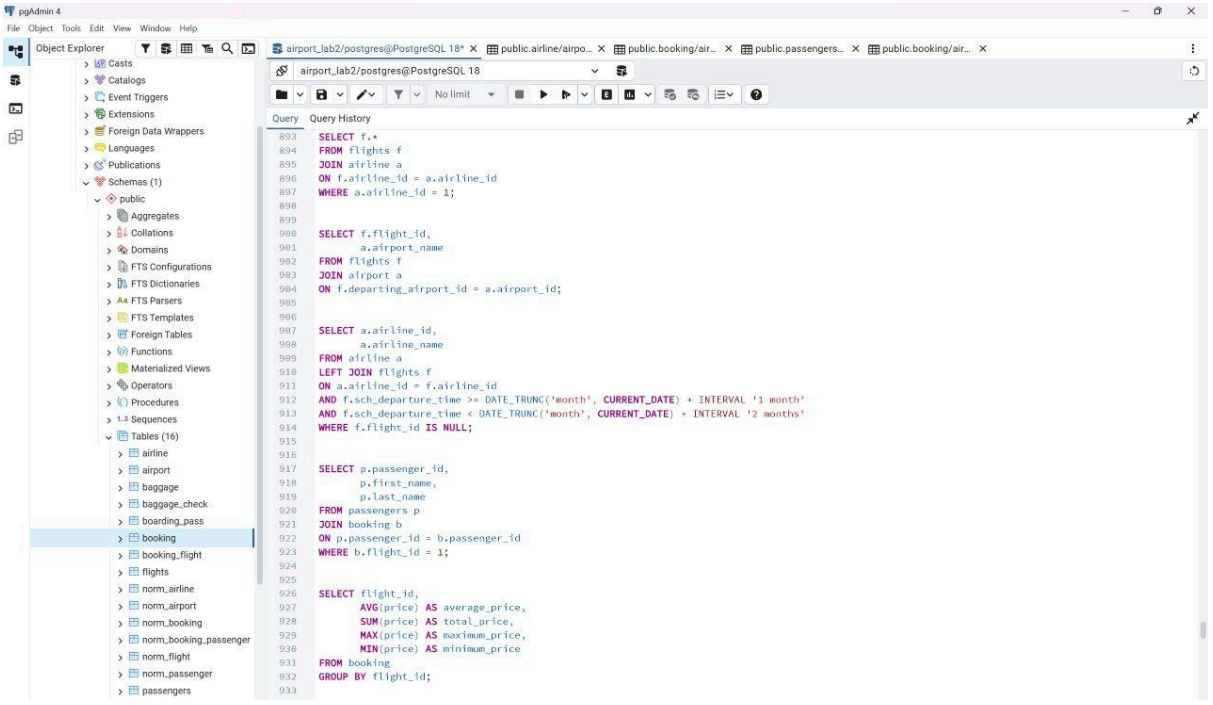
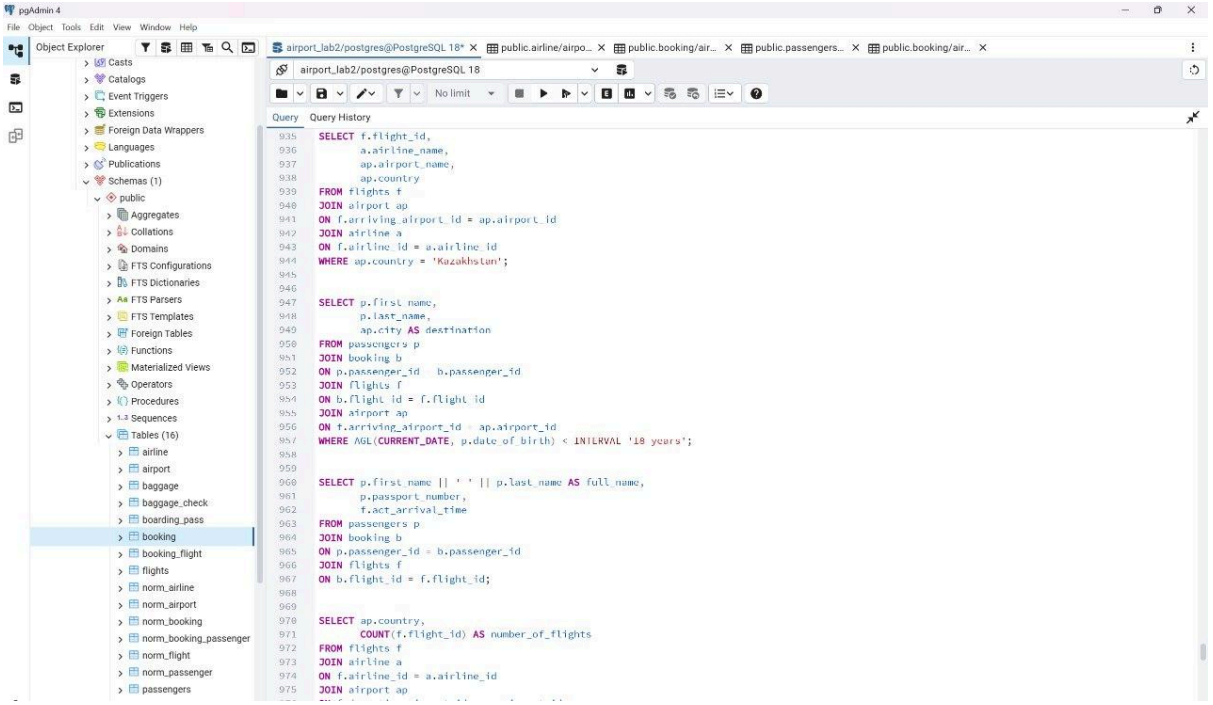
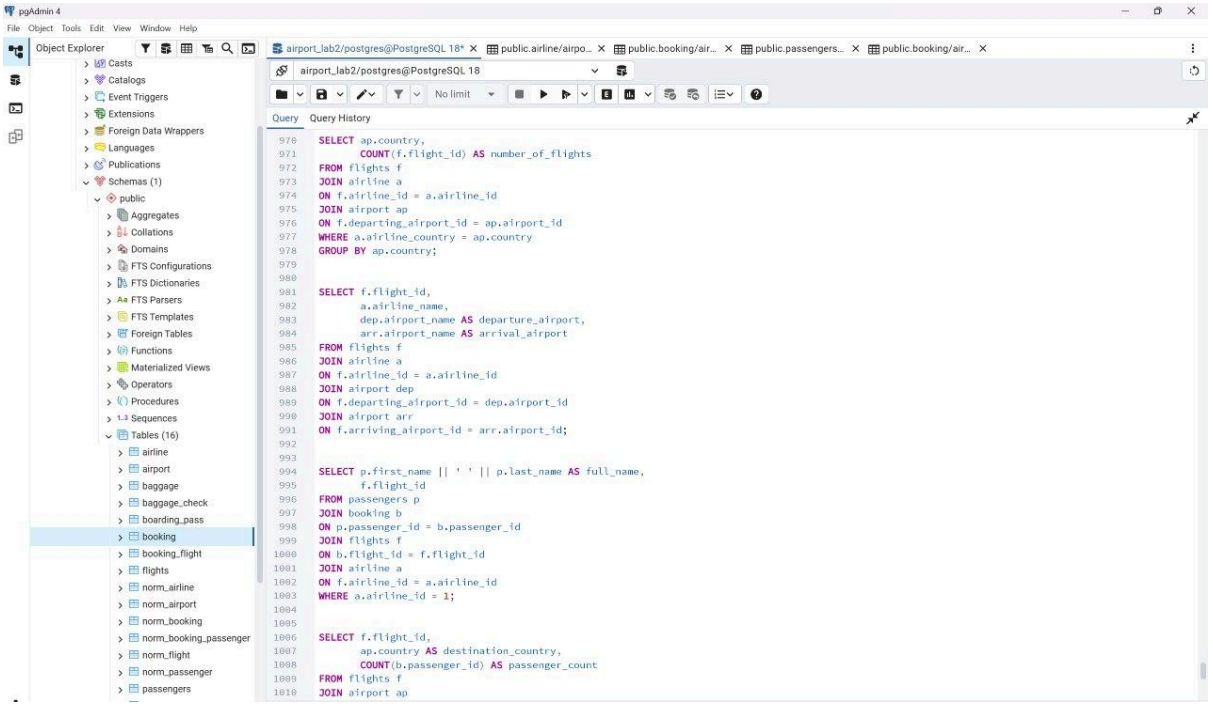
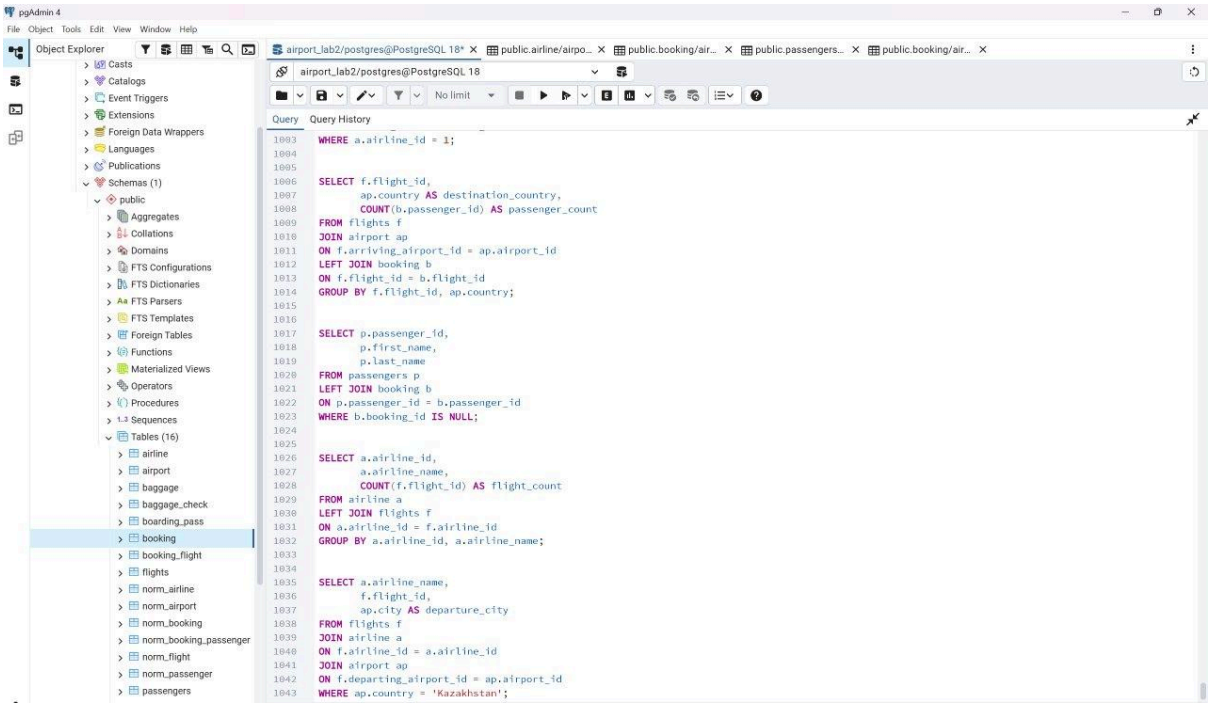

pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
airport_lab2/postgres@PostgreSQL 18*
public.airline/airpo...
public.booking/air...
public.passengers...
public.booking/air...
airport_lab2/postgres@PostgreSQL 18
No limit
Query
Query History
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (16)
airline
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
norm_airline
norm_airport
norm_booking
norm_booking_passenger
norm_flight
norm_passenger
passengers
SELECT f.*
FROM flights f
JOIN airline a
ON f.airline_id = a.airline_id
WHERE a.airline_id = 1;
SELECT f.flight_id,
a.airport_name
FROM flights f
JOIN airport a
ON f.departing_airport_id = a.airport_id;
SELECT a.airline_id,
a.airline_name
FROM airline a
LEFT JOIN flights f
ON a.airline_id = f.airline_id
AND f.sch_departure_time >= DATE_TRUNC('month', CURRENT_DATE) + INTERVAL '1 month'
AND f.sch_departure_time < DATE_TRUNC('month', CURRENT_DATE) + INTERVAL '2 months'
WHERE f.flight_id IS NULL;
SELECT p.passenger_id,
p.first_name,
p.last_name
FROM passengers p
JOIN booking b
ON p.passenger_id = b.passenger_id
WHERE b.flight_id = 1;
SELECT flight_id,
AVG(price) AS average_price,
SUM(price) AS total_price,
MAX(price) AS maximum_price,
MIN(price) AS minimum_price
FROM booking
GROUP BY flight_id;


pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
airport_lab2/postgres@PostgreSQL 18*
public.airline/airpo...
public.booking/air...
public.passengers...
public.booking/air...
airport_lab2/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT f.flight_id,
a.airline_name,
ap.airport_name,
ap.country
FROM flights f
JOIN airport ap
ON f.arriving_airport_id = ap.airport_id
JOIN airline a
ON f.airline_id = a.airline_id
WHERE ap.country = 'Kazakhstan';
SELECT p.first_name,
p.last_name,
ap.city AS destination
FROM passengers p
JOIN booking b
ON p.passenger_id = b.passenger_id
JOIN flights f
ON b.flight_id = f.flight_id
JOIN airport ap
ON f.arriving_airport_id = ap.airport_id
WHERE AGE(CURRENT_DATE, p.date_of_birth) < INTERVAL '18 years';
SELECT p.first_name || ' ' || p.last_name AS full_name,
p.passport_number,
f.act_arrival_time
FROM passengers p
JOIN booking b
ON p.passenger_id = b.passenger_id
JOIN flights f
ON b.flight_id = f.flight_id;
SELECT ap.country,
COUNT(f.flight_id) AS number_of_flights
FROM flights f
JOIN airline a
ON f.airline_id = a.airline_id
JOIN airport ap


pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
airport_lab2/postgres@PostgreSQL 18*
public.airline/airpo...
public.booking/air...
public.passengers...
public.booking/air...
airport_lab2/postgres@PostgreSQL 18
No limit
Query
Query History
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (16)
airline
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
norm_airline
norm_airport
norm_booking
norm_booking_passenger
norm_flight
norm_passenger
passengers
970 SELECT ap.country,
971 COUNT(f.flight_id) AS number_of_flights
972 FROM flights f
973 JOIN airline a
974 ON f.airline_id = a.airline_id
975 JOIN airport ap
976 ON f.departing_airport_id = ap.airport_id
977 WHERE a.airline_country = ap.country
978 GROUP BY ap.country;
979
980
981 SELECT f.flight_id,
982 a.airline_name,
983 dep.airport_name AS departure_airport,
984 arr.airport_name AS arrival_airport
985 FROM flights f
986 JOIN airline a
987 ON f.airline_id = a.airline_id
988 JOIN airport dep
989 ON f.departing_airport_id = dep.airport_id
990 JOIN airport arr
991 ON f.arriving_airport_id = arr.airport_id;
992
993
994 SELECT p.first_name || ' ' || p.last_name AS full_name,
995 f.flight_id
996 FROM passengers p
997 JOIN booking b
998 ON p.passenger_id = b.passenger_id
999 JOIN flights f
1000 ON b.flight_id = f.flight_id
1001 JOIN airline a
1002 ON f.airline_id = a.airline_id
1003 WHERE a.airline_id = 1;
1004
1005
1006 SELECT f.flight_id,
1007 ap.country AS destination_country,
1008 COUNT(b.passenger_id) AS passenger_count
1009 FROM flights f
1010 JOIN airport ap


pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
airport_lab2/postgres@PostgreSQL 18*
public.airline/airpo...
public.booking/air...
public.passengers...
public.booking/air...
airport_lab2/postgres@PostgreSQL 18
No limit
Query
Query History
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (16)
airline
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
norm_airline
norm_airport
norm_booking
norm_booking_passenger
norm_flight
norm_passenger
passengers
1003 WHERE a.airline_id = 1;
1004
1005
1006 SELECT f.flight_id,
1007 ap.country AS destination_country,
1008 COUNT(b.passenger_id) AS passenger_count
1009 FROM flights f
1010 JOIN airport ap
1011 ON f.arriving_airport_id = ap.airport_id
1012 LEFT JOIN booking b
1013 ON f.flight_id = b.flight_id
1014 GROUP BY f.flight_id, ap.country;
1015
1016
1017 SELECT p.passenger_id,
1018 p.first_name,
1019 p.last_name
1020 FROM passengers p
1021 LEFT JOIN booking b
1022 ON p.passenger_id = b.passenger_id
1023 WHERE b.booking_id IS NULL;
1024
1025
1026 SELECT a.airline_id,
1027 a.airline_name,
1028 COUNT(f.flight_id) AS flight_count
1029 FROM airline a
1030 LEFT JOIN flights f
1031 ON a.airline_id = f.airline_id
1032 GROUP BY a.airline_id, a.airline_name;
1033
1034
1035 SELECT a.airline_name,
1036 f.flight_id,
1037 ap.city AS departure_city
1038 FROM flights f
1039 JOIN airline a
1040 ON f.airline_id = a.airline_id
1041 JOIN airport ap
1042 ON f.departing_airport_id = ap.airport_id
1043 WHERE ap.country = 'Kazakhstan';