


Lab 04

This is me running the man pwd command after logging into Ubuntu

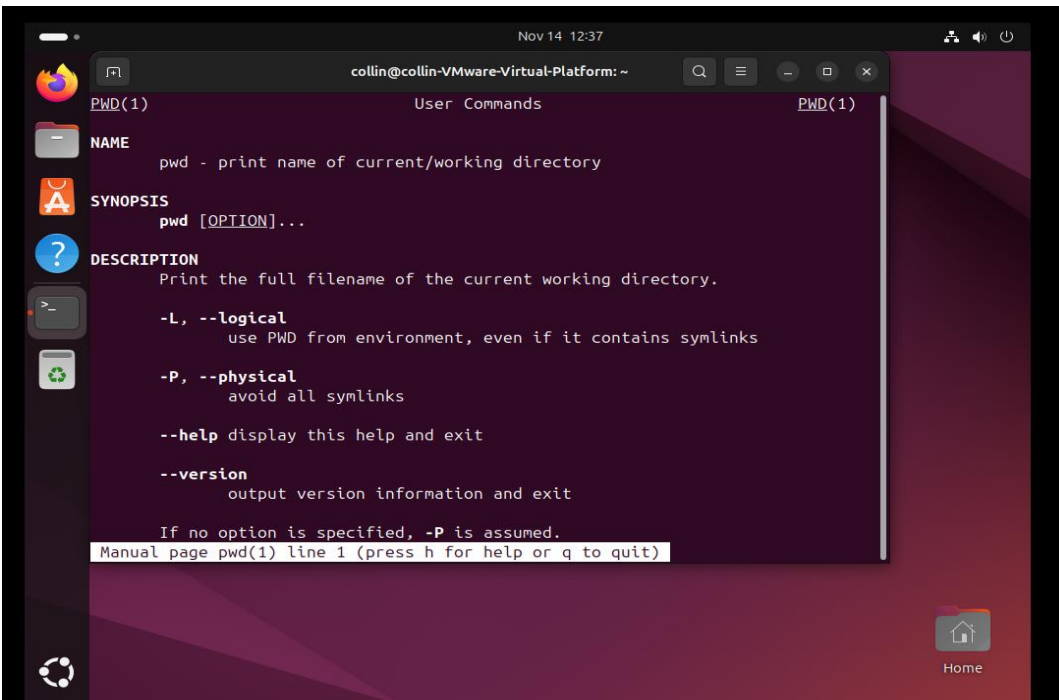

The screenshot shows a terminal window titled "collin@collin-VMware-Virtual-Platform: ~" with a search bar and window controls. The terminal displays the output of the "man pwd" command. The output is formatted with sections: NAME, SYNOPSIS, DESCRIPTION, and options. The NAME section says "pwd - print name of current/working directory". The SYNOPSIS section shows "pwd [OPTION]...". The DESCRIPTION section says "Print the full filename of the current working directory." The options section lists "-L, --logical" (use PWD from environment, even if it contains symlinks), "-P, --physical" (avoid all symlinks), "--help" (display this help and exit), and "--version" (output version information and exit). It also states "If no option is specified, -P is assumed." At the bottom, it says "Manual page pwd(1) line 1 (press h for help or q to quit)".

```
PWD(1)                                User Commands                                PWD(1)

NAME
  pwd - print name of current/working directory

SYNOPSIS
  pwd [OPTION]...

DESCRIPTION
  Print the full filename of the current working directory.

-L, --logical
  use PWD from environment, even if it contains symlinks


-P, --physical
  avoid all symlinks

--help display this help and exit

--version
  output version information and exit

If no option is specified, -P is assumed.
Manual page pwd(1) line 1 (press h for help or q to quit)
```

This is the result after using q during man pwd.

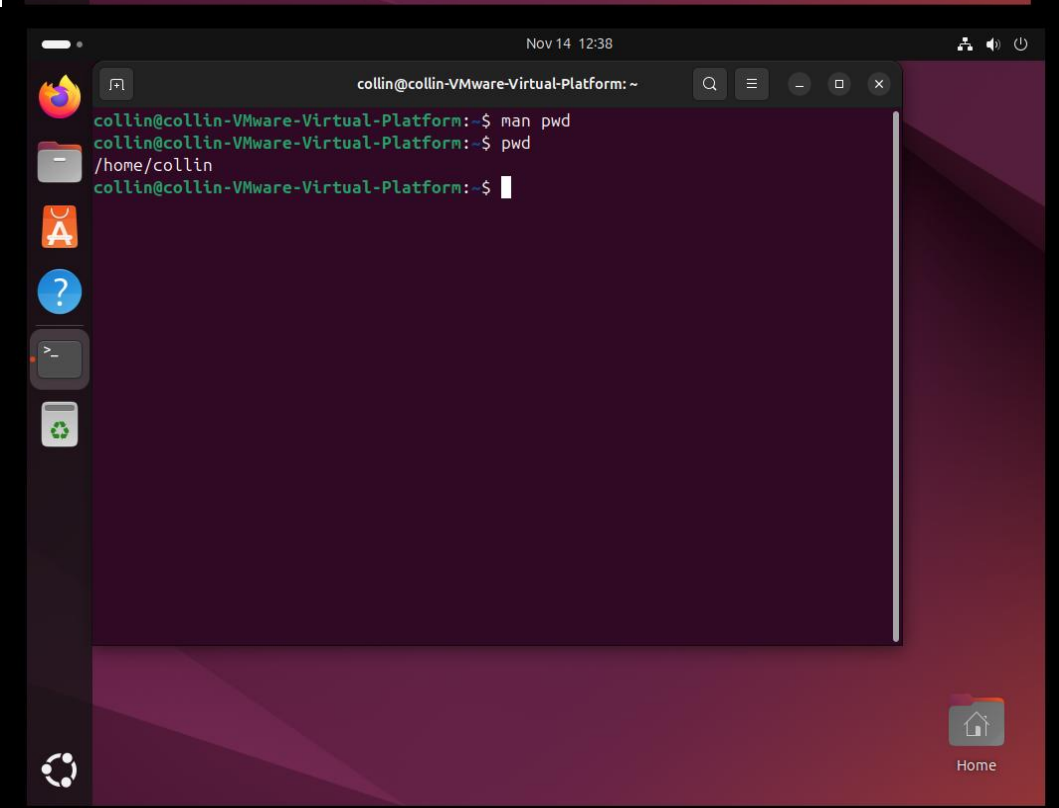

The screenshot shows the same terminal window after the user has pressed 'q' to exit the man page. The terminal now shows the prompt "collin@collin-VMware-Virtual-Platform:~\$". The user has entered "man pwd" and "pwd", and the output of "pwd" is "/home/collin".

```
collin@collin-VMware-Virtual-Platform:~$ man pwd
collin@collin-VMware-Virtual-Platform:~$ pwd
/home/collin
collin@collin-VMware-Virtual-Platform:~$
```

```
Nov 14 12:40
collin@collin-VMware-Virtual-Platform: ~
MKDIR(1) User Commands MKDIR(1)

NAME
  mkdir - make directories

SYNOPSIS
  mkdir [OPTION]... DIRECTORY...

DESCRIPTION
  Create the DIRECTORY(ies), if they do not already exist.

  Mandatory arguments to long options are mandatory for short options too.

  -m, --mode=MODE
      set file mode (as in chmod), not a=rwx - umask

  -p, --parents
      no error if existing, make parent directories as needed, with their file modes unaffected by any -m option.

  -v, --verbose
      print a message for each created directory
Manual page mkdir(1) line 1 (press h for help or q to quit)
```

This is the result of `man mkdir`.

```
Nov 14 12:46
collin@collin-VMware-Virtual-Platform: ~

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

collin@collin-VMware-Virtual-Platform:~$ mkdir King
collin@collin-VMware-Virtual-Platform:~$ mkdir King/Cars
collin@collin-VMware-Virtual-Platform:~$ mkdir King/Cars/Ford
collin@collin-VMware-Virtual-Platform:~$ mkdir King/Cars/Chevrolet
collin@collin-VMware-Virtual-Platform:~$ man cd
No manual entry for cd
collin@collin-VMware-Virtual-Platform:~$ help cd
cd: cd [-L|[-P [-e]] [-@]] [dir]
    Change the shell working directory.

    Change the current directory to DIR. The default DIR is the value of the HOME shell variable. If DIR is "-", it is converted to $OLDPWD.

    The variable CDPATH defines the search path for the directory containing DIR. Alternative directory names in CDPATH are separated by a colon (:). A null directory name is the same as the current directory. If DIR begins with a slash (/), then CDPATH is not used.

    If the directory is not found, and the shell option 'cdable_vars' is set, the word is assumed to be a variable name. If that variable has a value, its value is used for DIR.

Options:
  -L      force symbolic links to be followed: resolve symbolic links in DIR after processing instances of '..'
  -P      use the physical directory structure without following symbolic links: resolve symbolic links in DIR before processing instances of '..'
```

I've created the sub directories and used the help cd command.

```
Nov 14 12:48
collin@collin-VMware-Virtual-Platform: ~/King/Cars

the word is assumed to be a variable name. If that variable has a value,
its value is used for DIR.

Options:
-L      force symbolic links to be followed: resolve symbolic
links in DIR after processing instances of '..'
-P      use the physical directory structure without following
symbolic links: resolve symbolic links in DIR before
processing instances of '..'
-e      if the -P option is supplied, and the current working
directory cannot be determined successfully, exit with
a non-zero status
-@      on systems that support it, present a file with extended
attributes as a directory containing the file attributes

The default is to follow symbolic links, as if '-L' were specified.
'..' is processed by removing the immediately previous pathname component
back to a slash or the beginning of DIR.

Exit Status:
Returns 0 if the directory is changed, and if $PWD is set successfully when
-P is used; non-zero otherwise.

collin@collin-VMware-Virtual-Platform:~$ cd King/Cars
collin@collin-VMware-Virtual-Platform:~/King/Cars$ pwd
/home/collin/King/Cars
collin@collin-VMware-Virtual-Platform:~/King/Cars$ mkdir Dodge
collin@collin-VMware-Virtual-Platform:~/King/Cars$ mkdir Fiat
collin@collin-VMware-Virtual-Platform:~/King/Cars$ mkdir Subaru
collin@collin-VMware-Virtual-Platform:~/King/Cars$ ls
Chevrolet Dodge Fiat Ford Subaru
collin@collin-VMware-Virtual-Platform:~/King/Cars$
```

Creating the
Dodge, Fiat,
and Subaru

```
Nov 14 12:55
collin@collin-VMware-Virtual-Platform: ~/King/Cars/Subaru

collin@collin-VMware-Virtual-Platform:~$ cd King/Cars
collin@collin-VMware-Virtual-Platform:~/King/Cars$ pwd
/home/collin/King/Cars
collin@collin-VMware-Virtual-Platform:~/King/Cars$ mkdir Dodge
collin@collin-VMware-Virtual-Platform:~/King/Cars$ mkdir Fiat
collin@collin-VMware-Virtual-Platform:~/King/Cars$ mkdir Subaru
collin@collin-VMware-Virtual-Platform:~/King/Cars$ ls
Chevrolet Dodge Fiat Ford Subaru
collin@collin-VMware-Virtual-Platform:~/King/Cars$ cd Ford
collin@collin-VMware-Virtual-Platform:~/King/Cars/Ford$ mkdir F150
collin@collin-VMware-Virtual-Platform:~/King/Cars/Ford$ mkdir Flex
collin@collin-VMware-Virtual-Platform:~/King/Cars/Ford$ mkdir Focus
collin@collin-VMware-Virtual-Platform:~/King/Cars/Ford$ mkdir Mustang
collin@collin-VMware-Virtual-Platform:~/King/Cars/Ford$ ls
F150 Flex Focus Mustang
collin@collin-VMware-Virtual-Platform:~/King/Cars/Ford$ cd ../Chevrolet
collin@collin-VMware-Virtual-Platform:~/King/Cars/Chevrolet$ mkdir Silverado
collin@collin-VMware-Virtual-Platform:~/King/Cars/Chevrolet$ mkdir Trax
collin@collin-VMware-Virtual-Platform:~/King/Cars/Chevrolet$ mkdir Cruze
collin@collin-VMware-Virtual-Platform:~/King/Cars/Chevrolet$ mkdir Camaro
collin@collin-VMware-Virtual-Platform:~/King/Cars/Chevrolet$ ls
Camaro Cruze Silverado Trax
collin@collin-VMware-Virtual-Platform:~/King/Cars/Chevrolet$ cd ../Dodge
collin@collin-VMware-Virtual-Platform:~/King/Cars/Dodge$ mkdir RAM Dart Journey Charger
collin@collin-VMware-Virtual-Platform:~/King/Cars/Dodge$ ls
Charger Dart Journey RAM
collin@collin-VMware-Virtual-Platform:~/King/Cars/Dodge$ cd ../Subaru
collin@collin-VMware-Virtual-Platform:~/King/Cars/Subaru$ mkdir Outback Forester WRX Crosstrek
collin@collin-VMware-Virtual-Platform:~/King/Cars/Subaru$ ls
Crosstrek Forester Outback WRX
collin@collin-VMware-Virtual-Platform:~/King/Cars/Subaru$
```

This is creating
all the sub
directories for
the
manufacturers


```
Nov 14 13:04
collin@collin-VMware-Virtual-Platform: ~/King/Cars/Fiat
collin@collin-VMware-Virtual-Platform:~/King/Cars/Fiat$ mkdir 500c
mkdir: cannot create directory '500c': File exists
collin@collin-VMware-Virtual-Platform:~/King/Cars/Fiat$ mkdir '124 Spider'
mkdir: cannot create directory '124 Spider': File exists
collin@collin-VMware-Virtual-Platform:~/King/Cars/Fiat$
```

This is creating the sub directories for the Fiat manufacturer

I forgot to screenshot this process, that's why it telling me already created, I just typed it again just to show proof of concept.

```
Nov 14 12:55
collin@collin-VMware-Virtual-Platform: ~/King/Cars/Subaru
LS(1)
User Commands
NAME
ls - list directory contents
SYNOPSIS
ls [OPTION]... [FILE]...
DESCRIPTION
List information about the FILES (the current directory by default). Sort entries alphabetically if none of -cftuvSUX nor --sort is specified.
Mandatory arguments to long options are mandatory for short options too.
-a, --all
do not ignore entries starting with .
-A, --almost-all
do not list implied . and ..
--author
with -l, print the author of each file
-b, --escape
print C-style escapes for nongraphic characters
--block-size=SIZE
with -l, scale sizes by SIZE when printing them; e.g., '--block-size=M'; see SIZE format below
Manual page ls(1) line 1 (press h for help or q to quit)
```


Using the man ls command.

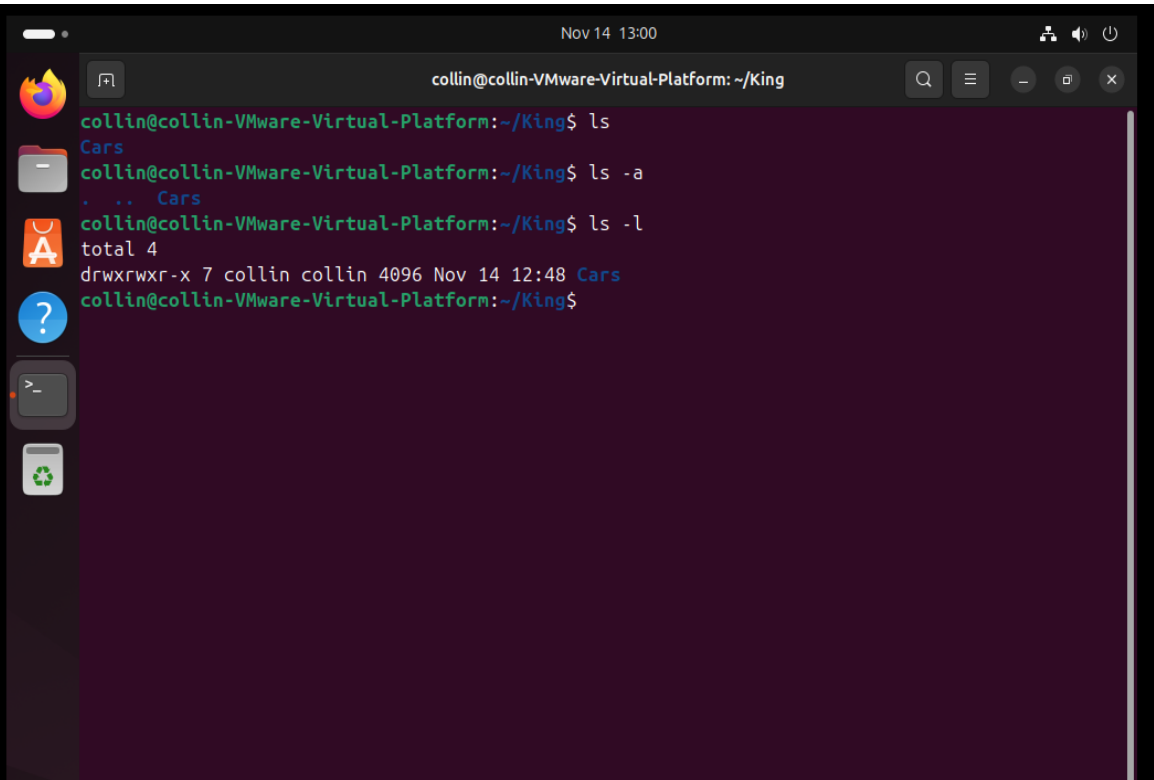

A terminal window titled "collin@collin-VMware-Virtual-Platform: ~/King" with a search bar and window controls. The terminal shows the following commands and output:

```
collin@collin-VMware-Virtual-Platform:~/King$ ls
Cars
collin@collin-VMware-Virtual-Platform:~/King$ ls -a
.  ..  Cars
collin@collin-VMware-Virtual-Platform:~/King$ ls -l
total 4
drwxrwxr-x 7 collin collin 4096 Nov 14 12:48 Cars
collin@collin-VMware-Virtual-Platform:~/King$
```

After the last screenshot, I hit q to quit, then used ls, ls -a, and ls -l

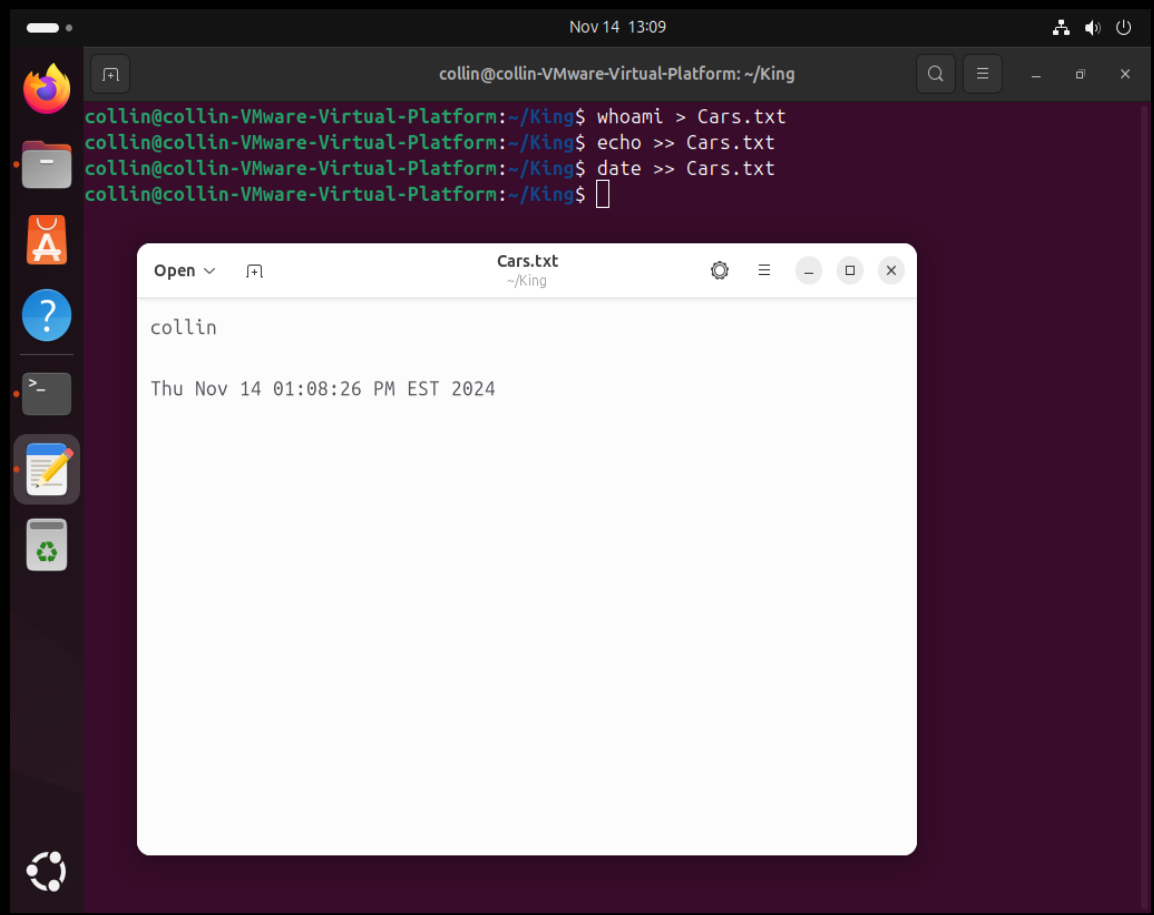

A terminal window titled "collin@collin-VMware-Virtual-Platform: ~/King" with a search bar and window controls. The terminal shows the following commands and output:

```
collin@collin-VMware-Virtual-Platform:~/King$ whoami > Cars.txt
collin@collin-VMware-Virtual-Platform:~/King$ echo >> Cars.txt
collin@collin-VMware-Virtual-Platform:~/King$ date >> Cars.txt
collin@collin-VMware-Virtual-Platform:~/King$
```

Overlaid on the terminal is a text editor window titled "Cars.txt" with a search bar and window controls. The editor contains the following text:

```
collin

Thu Nov 14 01:08:26 PM EST 2024
```

I've used whoami, then I've used the echo and date command to add to the txt file.

```
Nov 14 13:09
collin@collin-VMware-Virtual-Platform: ~/King
CAT(1) User Commands CAT(1)
NAME
cat - concatenate files and print on the standard output
SYNOPSIS
cat [OPTION]... [FILE]...
DESCRIPTION
Concatenate FILE(s) to standard output.
With no FILE, or when FILE is -, read standard input.
-A, --show-all
    equivalent to -vET
-b, --number-nonblank
    number nonempty output lines, overrides -n
-e
    equivalent to -vE
-E, --show-ends
    display $ at end of each line
-n, --number
    number all output lines
-s, --squeeze-blank
    suppress repeated empty output lines
Manual page cat(1) line 1 (press h for help or q to quit)
```

This is the result of using the man cat command.

```
Nov 14 13:16
collin@collin-VMware-Virtual-Platform: ~/King
collin@collin-VMware-Virtual-Platform: ~/King$ man cat
collin@collin-VMware-Virtual-Platform: ~/King$ cat Cars.txt
collin
Thu Nov 14 01:08:26 PM EST 2024
collin@collin-VMware-Virtual-Platform: ~/King$ ls >> Cars.txt
collin@collin-VMware-Virtual-Platform: ~/King$ ls -R >> Cars.txt
collin@collin-VMware-Virtual-Platform: ~/King$

./Cars/Dodge:
Charger
Dart
Journey
RAM

./Cars/Dodge/Charger:

./Cars/Dodge/Dart:

./Cars/Dodge/Journey:

./Cars/Dodge/RAM:

./Cars/Fiat:
124 Spider
500c

./Cars/Fiat/124 Spider:

./Cars/Fiat/500c:

./Cars/Ford:
```

This shows I've used cat on the cars.txt Then I used ls >> to add the subdirectories into the txt file, then used ls -R to get a recursive list.

