Aggregate dataset of policy roll-outs

Step 1

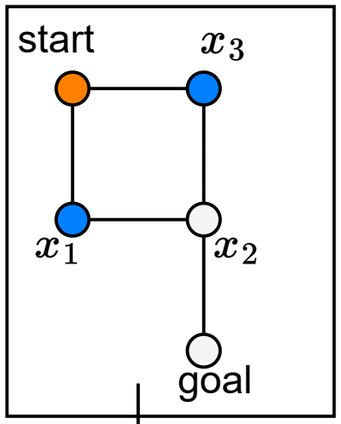

$x_1, h^* = 2$
$x_3, h^* = 2$

Step 2

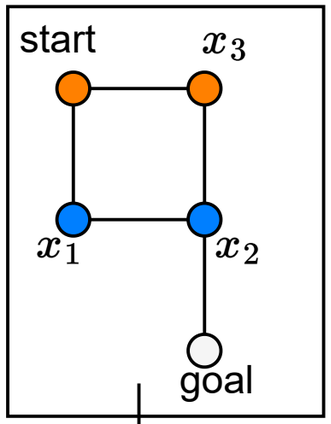

$x_2, h^* = 1$

Step 3

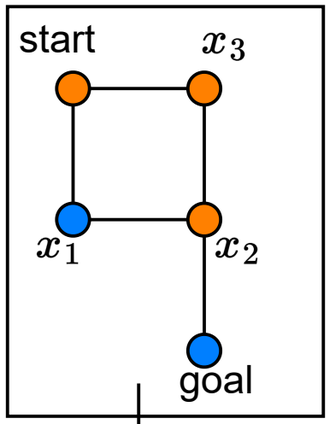

$\text{goal}, h^* = 0$

CLOSE REST OPEN

memory after *step 1*



New finge node x_2

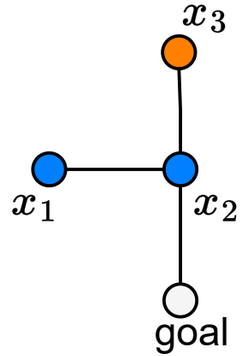

with neighborhood

goal features

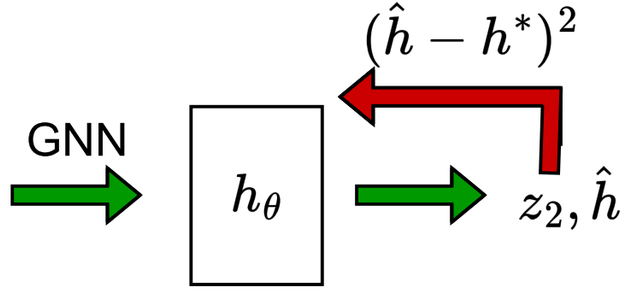

Train using TBTT on aggregated trajectories (step 2 snapshot)