



Dayforce Product Documentation

Dayforce RESTful Web Services Developer Guide

Version: R2026.1.0

June 2, 2026

Table of contents

1. About the Dayforce RESTful Web Services Developer Guide
2. Before You Begin
3. Getting Started with RESTful Web Services
 1. Integrate with the REST Service
 2. Create a Sample .NET Console Client Application
 1. Create a Project
 2. Add a Reference
 3. Add Source Code
 3. Authentication
 1. Add the Web Services Role Feature
 2. Token-Based Authentication
 1. Request an Access Token
 2. Request Dayforce APIs Using an Access Token
 4. Determine Which URL to Use
 5. HTTP Verbs
4. RESTful Add and Update Background Screening Data
 1. POST Background Screening Billing Codes
 2. POST Background Screening Packages
 3. POST Background Screening Provider Statuses
 4. PATCH Candidate Background Screening
 5. PATCH Candidate Background Screening Right to Work
 6. PATCH Candidate Background Screening Personal Identifiable Information
 7. PATCH Candidate Background Screening Adjudication Status
 8. PATCH Candidate Background Screening Status
 9. Background Screening Data Models
 1. Response Body Schema Description
5. RESTful Retrieve Benefits Enrollment Data
 1. BenefitsCarrierFeedOngoingExports
 2. BenefitsCarrierFeedOpenEnrollmentExports
 3. BenefitsCarrierFeedMultiCarrierOngoingExports
 4. BenefitsCarrierFeedMultiCarrierOpenEnrollmentExports
6. REST Services for Retrieving Employee Information
7. REST Service for Adding Employee Information
8. REST Services for Updating Employee Information
 1. POST and PATCH Employee Subordinate Resources
 2. ProcessResult Messages
9. RESTful Retrieve Org Unit Data
 1. RESTful Get Org Unit XRefCodes

2. [RESTful Get Org Unit Details](#)
10. [RESTful Add and Update Org Units](#)
 1. [POST Org Unit Data](#)
 2. [PATCH Org Unit Data](#)
11. [RESTful Retrieve Department Data](#)
 1. [RESTful Get Department XRefCodes](#)
 2. [RESTful Get Department Details](#)
12. [RESTful Add and Update Departments](#)
 1. [POST Department Data](#)
 2. [PATCH Department Data](#)
13. [RESTful Retrieve Job Data](#)
 1. [RESTful Get Job XRefCodes](#)
 2. [RESTful Get Job Details](#)
14. [RESTful Add and Update Jobs](#)
 1. [POST Job Data](#)
 2. [PATCH Job Data](#)
15. [RESTful Retrieve Position Data](#)
 1. [RESTful Get Position XRefCodes](#)
 2. [RESTful Get Position Details](#)
16. [RESTful Add and Update Positions](#)
 1. [POST Position Data](#)
 2. [PATCH Position Data](#)
17. [RESTful Retrieve HR Admin Data](#)
 1. [RESTful Get HR Admin XRefCodes](#)
 2. [RESTful Get HR Admin Details](#)
18. [REST Services for Retrieving Documents](#)
19. [RESTful Add Employee Availability Data](#)
 1. [POST Availability](#)
20. [REST Service for Adding Employee Raw Clock Entries](#)
21. [REST Services for Retrieving WFM Data](#)
22. [RESTful Retrieve Labor Metrics](#)
 1. [RESTful Get Labor Metrics XRefCodes](#)
 2. [RESTful Get Labor Metric Type XRefCodes](#)
23. [RESTful Add and Update Labor Metrics](#)
 1. [POST Labor Metrics](#)
 2. [PATCH Labor Metrics](#)
 3. [POST Labor Metric Types](#)
 4. [PATCH Labor Metric Types](#)
24. [RESTful Retrieve and Delete Legacy Labor Metrics](#)
 1. [RESTful Get Legacy Labor Metrics](#)
 2. [RESTful Delete Legacy Labor Metrics](#)
25. [RESTful Add and Update Legacy Labor Metrics](#)

1. POST Legacy Labor Metrics
 2. PATCH Legacy Labor Metrics
26. RESTful Retrieve Projects Data
27. RESTful Add and Update Projects Data
 1. POST Projects Data
 2. PATCH Projects Data
28. RESTful Retrieve and Insert Employee Balance Periods and Transactions
 1. Get Employee Balance Periods
 2. Get Employee Balance Transactions
 3. POST Employee Balance Transactions
 4. PATCH Employee Balance Transactions
29. RESTful Retrieve and Insert Employee Pay Data
 1. RESTful Get Employee Pay Summaries
 2. RESTful Get Employee Pay Adjustments
 3. POST Employee Pay Adjustment Data
 4. PATCH Employee Pay Adjustment Data
30. RESTful Retrieve Job Step Rates
31. RESTful Retrieve Employee Retro Data
32. REST Services for Retrieving Report Metadata and Report Data
33. Integrations with Candidate Assessment Providers
 1. RESTful GET Assessment List
 2. RESTful POST Candidate Assessment Registration
 3. RESTful POST Candidate Assessment Status
 4. RESTful POST Candidate Reports
 5. RESTful POST Candidate Scores
34. REST Services for Updating an Employee's I-9 Order Status
35. REST Services for Retrieving Job Posting Feeds
36. RESTful Add Candidate Profile and Application Data
 1. RESTful Get Job Postings
 2. RESTful GET Job Posting Questionnaires
 3. RESTful POST Candidate Sourcing
 4. RESTful GET Candidate Application Statuses
37. RESTful Rate Limiter
38. RESTful Get KPI Data
 1. POST and PATCH KPI Data
 1. POST KPI Data
 2. PATCH KPI Data
39. RESTful Get Plan Targets
 1. POST and PATCH Plan Targets
 1. POST Plan Targets
 2. PATCH Plan Targets
40. RESTful Get Operating Hours

1. POST and PATCH Operating Hours
 1. POST Operating Hours
 2. PATCH Operating Hours
41. RESTful Add and Update Employee Punches
 1. POST Employee Punches
 2. PATCH Employee Punches
42. RESTful Delete Employee Punches
43. RESTful Retrieve, Add, and Update Employee Schedules
 1. GET Employee Schedules
 2. POST Employee Schedules
 3. PATCH Employee Schedules
 4. RESTful Retrieve Org Unit Data
 1. RESTful Get Org Unit XRefCodes
 2. RESTful Get Org Unit Details
44. RESTful Add and Update Employee Pay Adjustment Data
 1. POST Employee Pay Adjustments
 2. PATCH Employee Pay Adjustments Data
45. Pagination of Response Data
46. Data Authorization and Filtering
 1. Field Level Filtering
 2. Access Authorizations
47. Check for Errors

About the Dayforce RESTful Web Services Developer Guide

This guide is for developers who create code to interact with the Dayforce REST services API.

Note: Some of the new or updated features in this release might not yet be localized for French or for the other languages supported in Dayforce. Translation efforts for this content are ongoing. Also, because Dayforce is highly customizable, some of the features and options discussed in this guide might not be visible when you access Dayforce. To confirm your access, contact your organization's Dayforce administrator.

Additional Resources

It is recommended that you read the *Dayforce Web Services Introduction Guide* before beginning a development project. It contains important information about using Dayforce web services, including acceptable use, request parameters, design considerations and limitations.

Before You Begin

Before You Begin: It's strongly recommended that you thoroughly read the *Dayforce Web Services Introduction Guide*.

The *Dayforce Web Services Introduction Guide* contains critical information about using Dayforce Web Services, including:

- Acceptable use of Dayforce Web Services.
- Detailed information for the parameters available in each type of request.
- Example program flows for frequently used requests.
- Limitations of POST and PATCH operations.
- Design considerations for working with the Dayforce Rate Limits.

The content noted above ensures that the design of web services-consuming applications remains in line with Dayforce expectations and also provides valuable insight into using the available requests in an efficient and effective manner.

To use Dayforce Web Services, you must first configure Dayforce. The basic configuration of Dayforce to use Web Services follows this general process flow:

- Setting up a web services user account and role
- Configuring a password policy, and
- Configuring security, including access authorizations and field-level accesses.

These configuration steps might have already been completed for your organization. Contact a Dayforce Support or Implementation representative before using these features.

Getting Started with RESTful Web Services

This guide is for developers who create code to interact with the Dayforce REST Services API. As RESTful services, many development platforms can interact with them.

Topics covered in this guide include how to locate the correct version of the service to use, authentication and authorization, and how to make a request and interpret the response, including error responses.

This guide is divided into the following topics:

- Integrate with the REST Service
- Create a .NET Console Client Application
- Retrieve a list of Employee XRefCodes
- Update Employee Data
- Adding a New Employee
- Retrieve List of Documents based on Employee
- Retrieve a Single Document
- Authorize and Filter Data
- Check for Errors

You must perform the following configuration steps in Dayforce before you can begin using Dayforce Web Services:

- Set up a web services user account and role
- Configure a password policy
- Configure security, including access authorizations and field-level accesses

These configuration steps might have already been completed for your organization. Contact a Dayforce Support or Implementation representative before using these features.

Integrate with the REST Service

The REST service uses the HTTP protocol for communication and supports JSON for request and response payloads. There are many options for integrating with a REST service. This section will discuss primarily using .NET C# for integration.

It's recommended when developing a client with C# to use the Model classes and API classes built into the sample application. Using these classes will help you in understanding the object model and with formatting proper requests.

The URL for the REST services is the following:

`https://www.dayforcehcm.com/api/{clientName}/v1`

The REST service is also described using the OpenAPI specification which allows you to use tools capable of consuming the OpenAPI specification to generate client-side source code or applications. The URL for the OpenAPI specification is the following:

`https://www.dayforcehcm.com/api/{clientName}/swagger/docs/v1`

The service was developed using Microsoft .NET technologies and is hosted within Microsoft IIS.

Important: The OpenAPI specification and services at the above URLs will be updated as new features and functionality are added to the Dayforce REST Services. For this reason, you should design your solution in a way that makes it easy to upgrade your client.

Note that while the REST service will be updated as new versions of the application are released, it will continue to be compatible with previous versions of the application.

Breaking changes will be released with a URL having a new version number.

Create a Sample .NET Console Client Application

This section provides detailed steps for creating a sample console application.

Important: The code provided in this section is a sample only, and not production ready code. You must add the code qualities needed to make it production ready, such as better error handling.

To create a sample .NET console client application, you must:

- Create a project.
- Add references.
- Add source code from the provided samples applications into the Main method in the Program.cs source file.
- Compile and execute the sample application.

Each of these is described in the following topics:

- [Create a Project](#)
- [Add a Reference](#)
- [Add Source Code](#)

Create a Project

When creating a .NET console client application, you must first create a project.

To create a project:

1. Go to Visual Studio and click **File > New Project**.
2. Select **Console Application**.
3. Name the console application **DayforceRestSampleClient**.

Add a Reference

Before You Begin: The following instructions are specific to .NET. If you are developing with Java, read the **readme.txt** file with the Java sample code for information about which third party components to add.

1. In Visual Studio, in the Solution Explorer view, right-click the **DayforceRestSampleClient** project, and select **Manage NuGet Packages**.
2. Search for the following packages and install them:
 - **Json.NET**: this package is needed for serializing and deserializing JSON
 - **RestSharp**: this package is the REST client API
3. Right-click the **References** folder and click **Add Reference** and add **System.Runtime.Serialization**.

Note: To complete the sample client application, insert the logic shown in the following sections into the main method in the Program.cs source file, then compile and execute.

Add Source Code

To complete the sample client application, insert the logic shown in the following sections into the Main method in the **Program.cs** source file, then compile and execute.

1. Ensure that you have downloaded and extracted the .NET Sample application.
2. Right-click the project and click **Add > New Folder** and name it **Models**.
3. Right-click the new **Models** folder, then click **Add > Existing Item**.
4. In the location where you extracted the Sample application, go to **\RestNetClient\Model**, select all, and click **Add**.
5. Right-click the project and click **Add > Existing Item**.
6. In the location where you extracted the Sample application, go to **\RestNetClient** and select all of the files with a .cs extension.
7. Click **Add**.

Authentication

Each request you submit must include credentials that can be authenticated, and the user account must have access to the Web Services feature on its default role. The Dayforce REST services use the HTTP basic authentication protocol for passing credentials.

Note: Some third-party REST client APIs don't include the credentials on requests that result from a redirect response from the server. If you are receiving a 401 Unauthorized response, it might be due to this limitation. In the sample code, we use the RestSharp third party component for a REST client and we have implemented an `IAuthenticator`, which will pass the credentials on every request.

Add the Web Services Role Feature

You must add Web Services feature access to the default role of the user account to use Dayforce Web Services. At a minimum, you must add the Web Services role feature, and the Read Data subfeature under Web Services.

It's advisable to add the other role subfeatures in the **Web Services** feature: Explorer, Notification Status, Notification Subscriptions, and `PutWorkflowValidationAction`, which is required for the role to perform actions such as reading and updating data.


To add the Web Services feature to a role:

1. Go to System Admin > Roles.
2. Select the default role associate with the user.
3. Click the Features tab.
4. Expand HCM Anywhere > Web Services.
5. Select the checkboxes for Web Services and, at a minimum, Read Data.
6. Click Save, and then click Refresh.

Token-Based Authentication

Dayforce supports the ability to request Dayforce APIs using an access token. When you use an access token to call an API, you aren't required to authenticate using your user name and password. You can obtain an access token by calling the Dayforce identity service API with your Web Services login credentials. The access token can then be used to perform an API request. Using token-based authentication reduces the risk of exposing your login credentials to potential attackers as they're not sent with each API request. The token is valid for a limited amount of time, which reduces the risk of the token being compromised. For these reasons, it is highly recommended that you use token-based authentication.

The following diagram illustrates the process of requesting an access token:

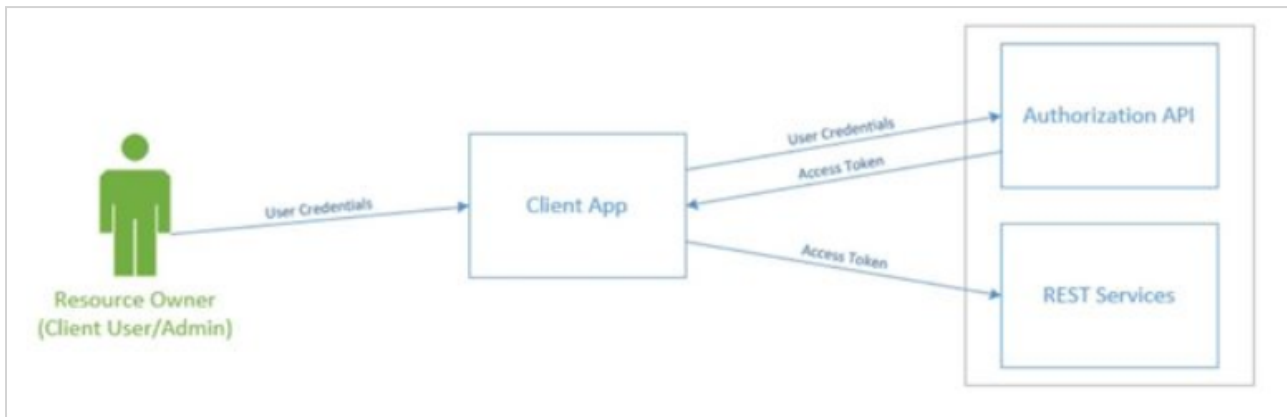

Important: Access tokens cannot be revoked. Hence, they must be handled responsibly.

Token-based authentication is available for Dayforce users that are already configured for Web Services. No additional configuration is required.

Request an Access Token

An access token can be retrieved with an API request to Dayforce Identity servers.

To retrieve an access token, you must make a POST request to any of the following URLs:

- Production: <https://dfid.dayforcehcm.com/connect/token>
- Test: <https://dfidtst.np.dayforcehcm.com/connect/token>

The following parameters must be included in the body of your request:

- Grant_type: Value is always *password*.
- CompanyId: Client namespace, used to connect to Dayforce UI or APIs.
- Username: Name of the Dayforce user dedicated to Web Services calls.
- Password: Password of the specific user.
- Client_Id: Scope of the token, the value is always *Dayforce.HCMAnywhere.Client*.

After you request an access token, the Dayforce Identity server verifies the credentials you provided in the request. If the credentials are successfully verified, the server returns a JSON Web Token that contains the access token needed to request Dayforce APIs. The JSON Web Token also contains the scope of the access token as well as the number of seconds it will remain valid.

The following example illustrates the corresponding Curl script for a token request:

```
curl--location--request POST "https://dfid.dayforcehcm.com/connect/token"--header
```

The following is an example of a JSON Web Token response:

```
{
```

```
"access_token": "eyJhbGciOiJSUzI1NiIsImtpZCI6IjYwMkZDQTBGNDk3NEUzMUE5OEYnNDBDN00",
"expires_in": 3600,
"token_type": "Bearer",
"scope": "dayforce df.hcm anywhere.client openid profile"
```

Note: The value of the `expires_in` parameter indicates the number of seconds that the access token will remain valid. The standard duration is 3,600 seconds. You can request a new token when needed.

Request Dayforce APIs Using an Access Token

After you obtain an access token, you can use it to request Dayforce APIs. You must include the *Bearer* key word in the authorization header when making requests. In this situation, you aren't required to provide a user name or password.

The following example illustrates the corresponding Curl script for an API request:

```
curl --location --request GET 'https://www.dayforcehcm.com/api/Company123/v1/ClientMetadata'
```

Note: When you make an API request using an access token, the security access associated with your user account is enforced.

Determine Which URL to Use

Dayforce hosts multiple versions of this service to support multiple clients. All clients use the same URL, and Dayforce issues an HTTP redirect on every request to ensure that your request is processed with the correct service.

If you are submitting many requests in a short period of time, you will benefit from obtaining the target redirect URL which will allow you to bypass the automatic redirect. To obtain the target URL, you should make the following REST service request, replacing `{clientName}` with your organization name:

```
https://www.dayforcehcm.com/api/{clientName}/V1/ClientMetadata
```

Important: This method must be called at a minimum of once a day if you store the URL returned from this method.

The client and version specific URL returned from this service will look very similar to this root URL, but will likely have a version number embedded within it.

Example Response

```
{
    "ServiceVersion":"58.x.x.x",
    "ServiceUri":"https://www.dayforcehcm.com/58/api"
}
```

Sample Code - Acquire Client Site URL

Program.cs

```
// Build up the base url to the service with the format of http://host/api/clientname/apiversion
Uri baseUri = new Uri(baseUrl + "/" + clientName + "/" + apiVersion);

// Instantiate the proxy class
employeesApi = new EmployeesApi(baseUri, userName, password);
```

clientMetadataApi.cs:

```
public class ClientMetadataApi : IClientMetadataApi
{
    private RestClientHelper restClient = new RestClientHelper();

    /// <summary>
    /// GET Client Metadata
    /// </summary>
    /// <returns>ClientMetadata</returns>
    public ApiResponse<ClientMetadata> GetClientMetadata()
    {
        var restRequest = new RestRequest("ClientMetadata", Method.Get);

        var response = restClient.ExecuteAndFollowRedirect<ClientMetadata>(restRequest);

        return new ApiResponse<ClientMetadata>
        {
            Payload = new Payload<ClientMetadata>
            {
                Data = response.Data
            },
            HttpStatusCode = response.StatusCode
        };
    }
}
```

The ClientMetadataApi response contains the current ServiceURL to which API requests should be made

The main program creates the API objects which contain an internal RestClientHelper. The RestClientHelper class can execute RestRequests as well as handle the redirects that the RESTful Web Services require.

HTTP Verbs

Dayforce follows the REST standards regarding the use of HTTP verbs to retrieve and update data. Below is a description of the verbs that are currently supported.

GET

GET is used to retrieve resource data, with responses in JSON format. Resources can be retrieved individually by using an XRefCode or as collections if an XRefCode isn't specified.

PATCH

PATCH is used to make changes to existing resources. The query string indicates which resource to update by specifying an XRefCode, and the request body contains the data. The data in the request body has the same structure as the response from the GET request.

Null and Missing Properties on the Request

It is important to understand how a null value on the request is treated differently from a property that is missing on the request. Failing to understand the difference could cause unintentional data changes.

The standard use case is to provide only the property values that you need to change. Excluding a property from the request implies that you don't want to change the value of that property in the Dayforce database.

If you include properties with a value of Null in the request, the REST service will update the corresponding property in the Dayforce database to Null.

While the above seems simple and intuitive, you must be careful when producing the request JSON from the response body because some JSON APIs will produce null valued properties in the output by default. The sample app has been coded to handle this situation.

As an example, suppose you need to change the last name of an employee and also remove their home phone number. The request for this follows where any employee property not shown in the request remains unchanged, but the **HomePhone** value is removed from the database.

```
{
  "HomePhone": null,
  "LastName": "newName",
  "MaidenName": "priorName"
}
```

POST

POST is used to add new entities to the system. This should be familiar as it's the same process used by web browsers to submit form data to a web server.

Like updating a resource with a PATCH request, the query string will indicate the XRefCode of the resource to add, and the request body will contain the data. The data in the request body has the same structure as the response from the GET request.

Note: XRefCodes must be unique. To add a new resource, you must come up with an XRefCode that is unique to that resource. Using an XRefCode that is already in use will result in an error when the data is validated.

RESTful Add and Update Background Screening Data

The HTTP verbs **POST** and **PATCH** are used to process inserts and updates to candidate background screening information. Insert and update capabilities support adding new background screening data for a candidate and updating Dayforce with the list of Packages and Billing Codes from background screening providers.

The following topics contain more information about the **POST** and **PATCH** background screening endpoints:

- [POST Background Screening Billing Codes](#)
- [POST Background Screening Packages](#)
- [POST Background Screening Provider Statuses](#)
- [PATCH Candidate Background Screening](#)
- [PATCH Candidate Background Screening Right to Work](#)
- [PATCH Candidate Background Screening Personal Identifiable Information](#)
- [PATCH Candidate Background Screening Adjudication Status](#)
- [PATCH Candidate Background Screening Status](#)

POST Background Screening Billing Codes

POST Background Screening Billing Codes endpoint enables the provider to send a list of Billing Codes to Dayforce. The provider can also send the list of associated packages (if any) together.

Note: Billing Codes that aren't part of the request are considered deleted or inactive.

The URL for **POST** Background Screening Billing Codes uses the following base URL:

`https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/BillingCode`

Parameters

ProviderReference parameter type and description

Parameters	Type	Description
ProviderReference*	String	Provider Unique Identifier.

Response Objects

Properties, type and descriptions of response objects

Object Name	Object Properties	Type	Description
-------------	-------------------	------	-------------

BillingCodes	BillingCodeId*	String	Provider billing code id
	Name	String	Billing code name
	Description	String	Billing code description
	AssociatedPackages	N/A	List of associated packages to a billing code
AssociatedPackages	PackageId*	String	Provider package id
	Name*	String	Package name
	Description	String	Package description
	IncludeRTW	Boolean	Defines whether the package supports Right to Work

Below is a sample response that Dayforce is expecting from the provider:

```
{
  "ProviderReference": "BS_GENERIC",
  "BillingCodes": [
    {
      "BillingCodeId": "3",
      "Name": "Billing Code 3",
      "Description": "Billing Code 3 Description"
      "AssociatedPackages": [
        {
          "PackageId": "4",
          "Name": "Package 4",
          "Description": "Package 4 Description",
          "IncludeRTW": true
        },
        {
          "PackageId": "5",
          "Name": "Package 5",
          "Description": "Package 5 Description",
        }
      ]
    }
  ]
}
```

POST Background Screening Packages

POST Background Screening Packages endpoint enables the provider to send a list of packages to Dayforce. The provider can also send the list of associated billing codes (if any) together.

Note: Packages that aren't part of the request are considered deleted or inactive.

The URL for POST Background Screening Packages uses the following base URL:

<https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/Package>

Parameters

ProviderReference parameter type and description

Parameters	Type	Description
ProviderReference*	String	Provider unique identifier

Response Objects

Properties, type and descriptions of response objects

Object Name	Properties	Type	Description
Packages	PackageId*	String	Provider package id
	Name*	String	Package name
	Description	String	Package description
	IncludeRTW	Boolean	Defines whether the package supports Right to Work
	AssociatedBillingCodes	N/A	List of associated billing codes to a package
AssociatedBillingCodes	BillingCodeId*	String	Provider billing code id
	Name	String	Billing code name
	Description	String	Billing code description

Below is a sample response that Dayforce is expecting from the provider:

```
{
  "ProviderReference": "BS_GENERIC",
  "Packages": [
    {
      "PackageId": "1",
      "Name": "Package 1",
      "Description": "Package 1 Description",
      "IncludeRTW": true,
      "AssociatedBillingCodes": [
```

```

{
    "BillingCodeId": "1",
    "Name": "Billing Code 1",
    "Description": "Billing Code 1 Description"
},
{
    "BillingCodeId": "2",
    "Name": "Billing Code 2",
    "Description": "Billing Code 2 Description"
}
],
},
{
    "PackageId": "2",
    "Name": "Package 2",
    "Description": "Package 2 Description",
    "AssociatedBillingCodes": [
        {
            "BillingCodeId": "1",
            "Name": "Billing Code 1",
            "Description": "Billing Code 1 Description"
        },
        {
            "BillingCodeId": "3",
            "Name": "Billing Code 3",
            "Description": "Billing Code 3 Description"
        }
    ]
}
]
}

```

POST Background Screening Provider Statuses

POST Background Screening Provider Statuses endpoint enables the provider to send background screening statuses to Dayforce.

Each of the statuses are optional: Order Status, Adjudication Status and Result Status. However, the provider needs to send at least one status in the request.

The URL for **POST** Background Screening Provider Statuses uses the following base URL:

`https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/ProviderStatuses` **POST** {Background Screening Provider Statuses}

Parameters

Parameters, types, and descriptions of statuses

Parameters	Type	Description
ProviderReference	String	Provider unique identifier
OrderStatuses	List of strings	List of strings of the screening order statuses
AdjudicationStatuses	List of strings	List of strings of the screening adjudication statuses
ResultStatuses	List of strings	List of strings of the screening result statuses

Response Objects

Below is a sample response that Dayforce is expecting from the provider:

```
{
  "ProviderReference": "BS_GENERIC",
  "OrderStatuses": ["Order Status 1", "Order Status 2"],
  "ResultStatuses": ["Result Status 1", "Result Status 2"],
  "AdjudicationStatuses": ["Adjudication Status 1", "Adjudication Status 2"]
}
```

PATCH Candidate Background Screening

Patch Candidate Background Screening to Dayforce. Candidate Background Screening enables the provider to update the background screening status, URL, Report containing Personal Identifiable Information (PII) to Dayforce.

The URL for **PATCH** Candidate Background Screening uses the following base URL:

`https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening`

Parameters

Object name, properties, type, and description for parameters

Parameters	Object Name	Object Properties	Type	Description
------------	-------------	-------------------	------	-------------

ScreeningRequestId*	N/A	N/A	String	Dayforce candidate background screening reference
URL	N/A	N/A	String	Partner background screening link to access candidate result or link towards Partner site.
ScreeningStatus	Screening Status object	Status	String	Candidate background screening status
		AdjudicationStatus	String	Candidate background screening adjudication status
CandidatePII	Candidate PII object	DateOfBirth	String	Candidate date of birth
		SocialSecurityNumber	String	Candidate Social Security number
		SocialInsuranceNumber	String	Candidate Social Insurance number
		DriverLicense	String	Candidate driver license

Below is a sample response that Dayforce is expecting from the provider:

```
{
  "ScreeningRequestId": "398741C26EF646E58C85AF9033BC7960",
  "Url": "http://www.example.com/?id=1bf0969a-3f08-499d-b64f-c6a0348baa32",
  "ScreeningStatus": {
    "Status": "Complete",
    "AdjudicationStatus": "Done"
  },
  "CandidatePII": {
    "DateOfBirth": "1990-04-20",
    "SocialSecurityNumber": "351762213",
    "SocialInsuranceNumber": "111111",
    "DriverLicense": "RV046216"
  }
}
```

PATCH Candidate Background Screening Right to Work

Patch Candidate Background Screening Right to Work to Dayforce. Candidate work rights status is displayed on the candidate grid in the Indicators field.

The URL for PATCH Candidate Background Screening uses the following base URL:

<https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/CandidateRightToWorkResults>

Parameters

Object name, properties, type, and description for parameters

Parameters	Subparameters	Type	Description
ScreeningRequestId*	N/A	String	Dayforce candidate background screening reference ID
CandidateRightToWorkResults	See next table	N/A	The candidate right to work results. See next table for parameters.

CandidateRightToWorkResults Parameters

Object name, properties, type and description for parameters for
CandidateRightToWorkResults

CandidateRightToWorkResults Parameters	Subparameters	Subparameters	Type	Description
CandidateRightToWorkResultId			Int	The candidate right to work result identifier
WorkRightStatus			String	The right to work status. One of: "UNLIMITED", "LIMITED" or "NONE"
Status			String	The status of the process. For example, "Pending."

DateIssued		DateTime	The date the right to work request was issued
PartnerIdentifier		Int	The partner identifier for the candidate
DateCompleted		DateTime	The date the right to work process was completed
WorkRightEffectiveStart		DateTime	The effective start date of the right to work.
WorkRightEffectiveEnd		DateTime	The effective end date of the right to work.
RejectionOrCancellationReasons			The rejection or cancellation reasons
	ReasonCode	String	The reason code for rejection/cancellation
	ReasonDescription	String	The reason description for rejection/cancellation
Documents			
	CandidateRTWDocumentId	Int	The unique identifier
	DocumentName	String	The document name
	DocumentExtension	String	The document extension
	DateAdded	DateTime	The date the document was added or uploaded
	DateExpire	DateTime	The expiry date of the document if any.
	Type	String	The type of document e.g. "PASSPORT"

PathwayCode		String	The pathway code (not applicable for every provider)
CountryCode		String	The country code
Sources			The documents' source
	SingleDocumentBase64	String	If the document is a single document, then the base64 is provided here.
	DocumentFrontBase64	String	If the document is a front-page document, then the base64 is provided here. For example, the front page of a passport.
	DocumentBackBase64	String	If the document is a back-page document, then the base64 is provided here. For example, the back page of a passport.
Details			The document details
	Name	String	The name of the document detail. For example, "Passport Number".
	Value	String	The value of the document detail
DocumentErrors			The document errors
	Code	String	The error code
	Message	String	The message of the document error

Below is a sample response that Dayforce is expecting from the provider:

```
{
  "ScreeningRequestId": "2BED0FA964C747B4B69B4E42C646E254",
  "CandidateRightToWorkResults": {
    "WorkRightStatus": "UNLIMITED",
    "Status": "DONE",
    "DateIssued": "2023-04-28T13:22:58.740Z",
    "PartnerIdentifier": 12,
    "DateCompleted": "2023-04-28T13:22:58.740Z",
    "WorkRightEffectiveStart": "2023-04-28T13:22:58.740Z",
    "WorkRightEffectiveEnd": null,
    "RejectionOrCancellationReasons": null,
    "Documents": [
      {
        "CandidateRTWDocumentId": 9,
```

```

"DocumentName": "PASSPORT_FRONT",
"DocumentExtension": "jpg",
"DateAdded": "2023-03-15T13:22:58.740Z",
"DateExpire": "2024-03-15T13:22:58.740Z",
"Type": "PASSPORT",
"PathwayCode": "PASSPORT_UK_CITIZEN",
"CountryCode": "CAN",
"Sources": {
  "SingleDocumentBase64": "",
  "DocumentFrontBase64": "INSERT_BASE64_HERE",
  "DocumentBackBase64": ""
},
"Details": [
  {
    "Name": "Passport Number",
    "Value": "223321234"
  },
  {
    "Name": "Other",
    "Value": "example"
  }
],
"DocumentErrors": null
},
{
  "CandidateRTWDocumentId": 10,
  "DocumentName": "PASSPORT_BACK",
  "DocumentExtension": "jpg",
  "DateAdded": "2023-03-15T13:22:58.740Z",
  "DateExpire": "2024-03-15T13:22:58.740Z",
  "Type": "PASSPORT",
  "PathwayCode": "PASSPORT_UK_CITIZEN",
  "CountryCode": "CAN",
  "Sources": {
    "SingleDocumentBase64": "",
    "DocumentFrontBase64": "",
    "DocumentBackBase64": "INSERT_BASE64_HERE"
  },
  "Details": [
    {
      "Name": "SSN",
      "Value": "223321234"
    }
  ]
}

```

```

    },
    {
      "Name": "TRV",
      "Value": "example"
    }
  ],
  "DocumentErrors": null
}
]
}
}

```

PATCH Candidate Background Screening Personal Identifiable Information

Patch Candidate Background Screening Personal Identifiable Information (PII) to Dayforce. It enables the provider to update the candidate PII to Dayforce.

The URL for **PATCH** Candidate Background Screening Personal Identifiable Information uses the following base URL:

<https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/PersonalIdentifiableInformation>

Parameters

Object name, properties, type and description for parameters

Parameters	Object Name	Object Properties	Type	Description
ScreeningRequestId*	N/A	N/A	String	Dayforce candidate background screening reference.
CandidatePII*	CandidatePII object	DateOfBirth	String	Candidate date of birth.
		SocialSecurityNumber	String	Candidate Social Security number.
		SocialInsuranceNumber	String	Candidate Social Insurance Number.
		DriverLicense	String	Candidate driver license.

Below is a sample response that Dayforce is expecting from the provider:

```

{
  "ScreeningRequestId": "C45E625A85DA437BBDDDB23FA25B46D4E",
  "CandidatePII": {

```

```

    "DateOfBirth": "1990-04-20",
    "SocialSecurityNumber": "351762213",
    "SocialInsuranceNumber": "111111",
    "DriverLicense": "RV046216"
  }
}

```

PATCH Candidate Background Screening Adjudication Status

Patch Candidate Background Screening Adjudication Status to Dayforce. Candidate Background Screening Adjudication Status is displayed on the candidate grid as part of the Screening Order Field. It is displayed side by side with the Background Screening Status.

The URL for **PATCH**Candidate Background Screening Adjudication Status uses the following base URL:

<https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/AdjudicationStatus>

Parameters

This endpoint is used to post candidate background screening adjudication status to Dayforce when there is an update with regards to the background screening adjudication status

Type and description for parameters

Parameters	Type	Description
ScreeningRequestId*	String	Dayforce candidate background screening reference
AdjudicationStatus*	String	Candidate background screening adjudication status

Below is a sample response that Dayforce is expecting from the provider:

```

{
  "ScreeningRequestId": "C45E625A85DA437BBDDDB23FA25B46D4E",
  "AdjudicationStatus": "Processing"
}

```

PATCH Candidate Background Screening Status

Patch Candidate Background Screening Status to Dayforce. Candidate Background Screening Status is displayed on the candidate grid as part of the Screening Order Field.

The URL for **PATCH** Candidate Background Screening Status uses the following base URL:

<https://www.dayforcehcm.com/api/CompanyName/V1/BackgroundScreening/Status>

Parameters

This endpoint is used to post candidate background screening status to Dayforce when there is an update with regards to the background screening status order.

Type and description of parameters

Parameters	Type	Description
ScreeningRequestId*	String	Dayforce candidate background screening reference
ScreeningStatus*	String	Candidate background screening order status

Below is a sample response that Dayforce is expecting from the provider:

```
{
  "ScreeningRequestId": "C45E625A85DA437BBDDDB23FA25B46D4E",
  "ScreeningStatus": "Completed"
}
```

Background Screening Data Models

The following is a list of all background screening models:

POST Model

This is the main model that will be sent to a background screening provider.

POST model parameters

Parameters	Type	Description
ScreeningReferenceId	String	Screening Reference ID – An identifier to facilitate linking candidates back to entities in your own system. It will be unique.
ScreeningRequestedDate	String (yyyy-MM-ddTHH:mm:ss.fffZ)	Screening Requested Date.
OrderDetails	OrderDetails Model	Information around Order Details.
CandidatePersonal	CandidatePersonal Model	Information around Candidate.
CandidateProfile	CandidateProfile Model	Information around Candidate Education history, Work history, Reference.

JobRequisition	JobRequisitionModel	Information around job requisition being applied.
----------------	---------------------	---

The OrderDetails, CandidatePersonal, CandidateProfile, and JobRequisition models are detailed in the next section.

OrderDetails Model

This model contains the Package Id, Billing Code, and Recruiter Email. All information is with regards to the screening order.

OrderDetails model parameters

Parameters	Type	Description
Packageld	String	Provider Package ID
BillingCode	String	Provider Billing Code
RecruiterEmail	String	Recruiter Email Address
HiringManagerEmail	String	Hiring Manager Email Address
SubmitterEmail	String	Submitter Email Address

CandidatePersonal Model

This model contains information related to the candidate personal information.

CandidatePersonal model parameters

Parameters	Type	Description
CandidateId	Number	Unique Identifier for Candidate
FirstName	String	Candidate First Name
LastName	String	Candidate Last Name
MiddleName	String	Candidate Middle Name
ConfirmedNoMiddleName	Boolean	Boolean value to indicate if there is a middle name.
PreferredGivenName	String	Candidate Preferred Given Name / Alias
Email*	String	Candidate Email
Phone	String	Candidate Phone Number
PostalAddress	PostalAddress Model	Candidate Postal Address

PostalAddress Model

This is a sub-model of the CandidatePersonal model. It contains information related to the candidate address.

PostAddress model parameters

Parameters	Type
------------	------

Address1	String
Address2	String
Address3	String
City	String
StateCode	String
PostalCode	String
CountryCode	String

CandidateProfile Model

This model contains information related to the Education History, Employment History, and References of the candidate.

CandidateProfile model parameters

Parameters	Type	Description
EducationHistory	List of CandidateEducationHistory model	Candidate Education History Information
EmploymentHistory	List of CandidateEmploymentHistory model	Candidate Employment History Information
References	List of CandidateReferences model	Candidate References Information

CandidateEducationHistory Model

This model forms the list of objects in the EducationHistory model. It contains information about the education history of the candidate.

CandidateEducationHistory model parameters

Parameters	Type
EducationHistoryId	Number
SchoolName	String
SchoolType	String
StartDate	String (YYYY-MM-DD)
EndDate	String (YYYY-MM-DD)
Degree	Degree Model
SchoolLocation	SchoolLocation Model

Degree Model

This is a sub-model of CandidateEducationHistory model. It contains information specific to the degree.

Degree model parameters

Parameters	Type
DegreeName	String
Major	String
DegreeCompleted	Boolean
GraduationDate	String (YYYY-MM-DD)
Comments	String

SchoolLocation Model

This is a sub-model of CandidateEducationHistory model. It contains information specific to the school location.

SchoolLocation model parameters

Parameters	Type
City	String
State	String
Country	String
PostalCode	String

CandidateEmploymentHistory Model

This model forms the list of objects in the EmploymentHistory model. It contains information about the education history of the candidate.

CandidateEmploymentHistory model parameters

Parameters	Type
EmploymentHistoryId	Number
Employername	String
CurrentEmployer	Boolean
JobTitle	String
Department	String
StartDate	String (YYYY-MM-DD)
EndDate	String (YYYY-MM-DD)
Salary	String
Location	Location Model

Location Model

This is a sub-model of CandidateEmploymentHistory model. It contains information specific to the Employment location.

Location model parameters

Parameters	Type
City	String
State	String
Country	String
PostalCode	String

CandidateReferences Model

This model forms the list of objects in the References model. It contains information about the candidate references.

CandidateReference model parameters

Parameters	Type
ReferenceId	Number
FirstName	String
LastName	String
MiddleName	String
PositionTitle	String
Relationship	String
ReferenceEmail	String
BusinessPhone	String
MobilePhone	String

JobRequisition Model

This model contains information related to the job requisition being applied by candidate.

JobRequisition model parameters

Parameters	Type	Description
JobRequisitionId	Number	Job Requisition ID
JobRequisitionTitle	String	Job Requisition Title
JobLocation	String	Job Location
DepartmentName	String	Job Department Name
DepartmentName	String	Job Requisition Hiring Manager
Recruiter	String	Job Requisition Recruiter

Response Body Schema Description

Required*

Response parameters and descriptions

Parameters	Type	Description
ScreeningRequestId		Dayforce candidate background screening reference
id*		Provider candidate background screening reference
Link		Candidate Background screening URL link
Errors		List of Errors (if Any)
	Code	Status of the request
	Message	Status of the request

Below is a sample response that Dayforce is expecting back from the provider after the POST call. Note that Id is the background screening provider's unique identifier of the screening request order.

```
{
  "ScreeningRequestId": "F7145A1047FD44C1A0CBADEF89C99C22",
  "Id": "123",
  "Link": "http://sample-background-screening-url.com"
}
```

Below is a sample request that Dayforce send to Provider:

```
{
  "ScreeningReferenceId": "F7145A1047FD44C1A0CBADEF89C99C22",
  "ScreeningRequestedDate": "2020-09-01T11:27:41.216Z",
  "OrderDetails": {
    "PackageId": "Package1",
    "BillingCode": "BillCode1",
    "RecruiterEmail": "Recruiter@email.com",
    "HiringManagerEmail": "HiringManager@email.com",
    "SubmitterEmail": "Submitter@email.com"
  },
  "CandidatePersonal": {
    "CandidateId": 10001,
    "FirstName": "CandidateFirstName",
    "LastName": "CandidateLastName",
    "ConfirmedNoMiddleName": true,
    "PreferredGivenName": "CandidatePreferreGivenName",
    "Email": "Candidate@email.com",
    "Phone": "123456789",
    "PostalAddress": {
```

```

    "Address1": "Address1",
    "Address2": "Address2",
    "Address3": "Address3",
    "City": "City",
    "PostalCode": "123456"
  },
},
"CandidateProfile": {
  "EducationHistory": [
    {
      "EducationHistoryId": 20001,
      "SchoolName": "CandidateSchoolName",
      "StartDate": "2020-01-01",
      "EndDate": "2020-07-01",
      "Degree": {
        "DegreeName": "Bachelor's",
        "Major": "Accounting",
        "DegreeCompleted": true
      },
      "SchoolLocation": {
        "City": "CandidateSchoolCity",
        "State": "CandidateSchoolState",
        "Country": "CandidateSchoolCountry"
      }
    }
  ],
  "EmploymentHistory": [
    {
      "EmploymentHistoryId": 20002,
      "EmployerName": "CandidateEmployerName",
      "CurrentEmployer": false,
      "Department": "CandidateDepartment",
      "JobTitle": "CandidateJobTitle",
      "StartDate": "2020-01-01",
      "EndDate": "2020-07-01",
      "Salary": "15000.00000",
      "Location": {
        "City": "CandidateEmployerCity",
        "Country": "CandidateEmploymentCountry"
      }
    }
  ]
},
],

```

```
"References": [  
  {  
    "ReferenceId": 20003,  
    "FirstName": "CandidateReferenceFirstName",  
    "LastName": "CandidateReferenceLastName",  
    "ReferenceEmail": "reference@email.com",  
    "BusinessPhone": "1234567899",  
    "MobilePhone": "9854245256"  
  }  
]  
,  
"JobRequisition": {  
  "JobRequisitionId": 30001,  
  "JobRequisitionTitle": "JobRequisitionTitle",  
  "JobLocation": "JobLocation",  
  "DepartmentName": "DepartmentName",  
  "HiringManager": "HiringManagerFirstName HiringManagerLastName",  
  "Recruiter": "RecruiterFirstName RecruiterLastName"  
}  
}
```

RESTful Retrieve Benefits Enrollment Data

Retrieving benefits enrollment data using RESTful services requires the consuming application to have knowledge of the codes that uniquely identify insurance carriers in Dayforce. These reference codes (XRefCodes) are used to request the benefits enrollment data using the RESTful interactions.

The following topics contain more information about the benefits enrollment endpoints:

- [BenefitsCarrierFeedOngoingExports](#)
- [BenefitsCarrierFeedOpenEnrollmentExports](#)
- [BenefitsCarrierFeedMultiCarrierOngoingExports](#)
- [BenefitsCarrierFeedMultiCarrierOpenEnrollmentExports](#)

BenefitsCarrierFeedOngoingExports

The BenefitsCarrierFeedOngoingExports endpoint retrieves ongoing data for employees and dependents who have benefit elections that are in effect as of the defined period range (X days before and after the API call date). This retrieved data is intended for regular transmission to a single carrier until an Open Enrollment file needs to be sent to the same carrier. The returned data payload is in the JSON format.

Parameters

BenefitsCarrierFeedOngoingExports parameters

Parameter Name	Type	Description
carrierXRefCode*	String	A reference code that maps to a given carrier
planStartDate*	String	The plan start date
planEndDate*	String	The plan end date
payrollEarningAccumulationXRefCodes	String	A comma delimited list of reference codes that map to a list of individual payroll earning accumulations
blackoutPeriodStartDate	String	The blackout period start date if applicable
lookBackDays	Integer	The number of days the export will look back from the execution date to find employee enrollments
lookForwardDays	Integer	The number of days the export will look forward from the execution date to find

		employee elections
clientNamespace*	String	Uniquely identifies the client's Dayforce instance to login

Response

The following is an example response:

Copy

```
{
  "Data": {
    "Header": {
      "RecordType": "string",
      "FileFormatMajorVersion": "string",
      "FileFormatMinorVersion": "string",
      "CTCReceiverId": "string",
      "CarrierName": "string",
      "CarrierFEINNumber": "string",
      "MasterPolicyNumber": "string",
      "EmployerName": "string",
      "EmployerFEINNumber": "string",
      "EmployerDivisionNumber": "string",
      "PlanStartDate": "2023-05-09T13:40:07.693Z",
      "CreateDate": "2023-05-09T13:40:07.693Z",
      "ClientId": "string",
      "CorrelationId": "string"
    },
    "EmployeeRecords": [
      {
        "EmployeeDetails": {
          "RecordType": "string",
          "FirstName": "string",
          "MiddleName": "string",
          "LastName": "string",
          "NameSuffix": "string",
          "NationalId": "string",
          "NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
          "XRefCode": "string",
          "EmployeeNumber": "string",
          "CultureCode": "string",
          "Citizenship": "string",
          "SeniorityDate": "2023-05-09T13:40:07.693Z",
```

```
"IsVisibleMinority": true,
"IsAboriginal": true,
"BadgeNumber": "string",
"EmploymentStatus": "string",
"EmploymentStatusReasonCode": "string",
"EmploymentStatusStartDate": "2023-05-09T13:40:07.693Z",
"EmploymentStatusEndDate": "2023-05-09T13:40:07.693Z",
"NormalWeeklyHours": 0,
"NormalSemiMonthlyHoursTop": 0,
"NormalSemiMonthlyHoursBottom": 0,
"AverageDailyHours": 0,
"BaseSalary": 0,
"BaseRate": 0,
"PayGroupCode": "string",
"EmployeeGroupCode": "string",
"PayTypeCode": "string",
"PayClassCode": "string",
"DateOfBirth": "2023-05-09T13:40:07.693Z",
"GenderCode": 0,
"MaritalStatusCode": "string",
"IncomeFrequency": 0,
"TobaccoSubstanceUse": true,
"DateLastSmoked": "2023-05-09T13:40:07.693Z",
"TobaccoUseEffectiveStart": "2023-05-09T13:40:07.693Z",
"TobaccoUseEffectiveEnd": "2023-05-09T13:40:07.693Z",
"Height": 0,
"Weight": 0,
"DisabilityCode": true,
"DisabilityBeginDate": "2023-05-09T13:40:07.693Z",
"DisabilityEndDate": "2023-05-09T13:40:07.693Z",
"DepartmentJobNameCode": "string",
"WorkAssignmentEffectiveStart": "2023-05-09T13:40:07.693Z",
"WorkAssignmentEffectiveEnd": "2023-05-09T13:40:07.693Z",
"EmploymentIndicatorCode": "string",
"VirtualIndicator": true,
"PositionLedgerCode": "string",
"WorkedInState": "string",
"ManagerFirstName": "string",
"ManagerLastName": "string",
"ManagerEmail": "string",
"ManagerPhoneNumber": "string",
```

```

    "PayRunCheckDate": "2023-05-09T13:40:07.693Z",
    "PayPeriodStartDate": "2023-05-09T13:40:07.693Z",
    "PayPeriodEndDate": "2023-05-09T13:40:07.693Z",
    "PayFrequencyCode": 0,
    "Ethnicity": "string",
    "MedicareStatus": 0,
    "MedicareReasonCode": 0,
    "OriginalHireDate": "2023-05-09T13:40:07.693Z",
    "TerminationDate": "2023-05-09T13:40:07.693Z",
    "HireDate": "2023-05-09T13:40:07.693Z",
    "DateOfDeath": "2023-05-09T13:40:07.693Z",
    "InitialNoticeFlag": true,
    "GenderIdentity": "string",
    "Age": 0
  },
  "AddressDetails": [
    {
      "RecordType": "string",
      "AddressType": "string",
      "AddressLine1": "string",
      "AddressLine2": "string",
      "AddressLine3": "string",
      "City": "string",
      "County": "string",
      "StateCode": "string",
      "CountryCode": "string",
      "PostalCode": "string",
      "EffectiveStart": "2023-05-09T13:40:07.693Z",
      "EffectiveEnd": "2023-05-09T13:40:07.693Z"
    }
  ],
  "PropertyDetails": [
    {
      "RecordType": "string",
      "PropertyTypeCode": "string",
      "PropertyValue": "string",
      "PropertyValueCode": 0,
      "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
      "EffectiveEndDate": "2023-05-09T13:40:07.693Z"
    }
  ],

```



```

"OrgUnitDetails": [
  {
    "RecordType": "string",
    "OrgUnitName": "string",
    "OrgLevelCode": "string",
    "OrgUnitCode": "string",
    "LegalEntity": "string",
    "OrgUnitWorkSiteZipCode": "string",
    "OrgUnitLedgerCode": "string"
  }
],
"UnionMembershipDetails": [
  {
    "RecordType": "string",
    "UnionName": "string",
    "UnionXrefCode": "string",
    "MembershipEffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "MembershipDate": "2023-05-09T13:40:07.693Z"
  }
],
"ContactDetails": [
  {
    "RecordType": "string",
    "ContactInformation": "string",
    "CountryCode": "string",
    "ContactInformationCategoryCode": 0,
    "ContactInformationType": "string"
  }
],
"EmployeeElectionDetails": [
  {
    "RecordType": "string",
    "ElectionId": 0,
    "PlanTypeCode": "string",
    "PlanSubTypeCode": "string",
    "PlanXrefCode": "string",
    "PlanCode": "string",
    "PolicyNumber": "string",
    "OptionCode": "string",
    "CoverageStartDate": "2023-05-09T13:40:07.693Z",
    "CoverageEndDate": "2023-05-09T13:40:07.693Z",

```

```

    "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "EffectiveEndDate": "2023-05-09T13:40:07.693Z"
  }
],
"OrgUnitDetails": [
  {
    "RecordType": "string",
    "OrgUnitName": "string",
    "OrgLevelCode": "string",
    "OrgUnitCode": "string",
    "LegalEntity": "string",
    "OrgUnitWorkSiteZipCode": "string",
    "OrgUnitLedgerCode": "string"
  }
],
"UnionMembershipDetails": [
  {
    "RecordType": "string",
    "UnionName": "string",
    "UnionXrefCode": "string",
    "MembershipEffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "MembershipDate": "2023-05-09T13:40:07.693Z"
  }
],
"ContactDetails": [
  {
    "RecordType": "string",
    "ContactInformation": "string",
    "CountryCode": "string",
    "ContactInformationCategoryCode": 0,
    "ContactInformationType": "string"
  }
],
"EmployeeElectionDetails": [
  {
    "RecordType": "string",
    "ElectionId": 0,
    "PlanTypeCode": "string",
    "PlanSubTypeCode": "string",
    "PlanXrefCode": "string",
    "PlanCode": "string",

```

```

    "PolicyNumber": "string",
    "OptionCode": "string",
    "CoverageStartDate": "2023-05-09T13:40:07.693Z",
    "CoverageEndDate": "2023-05-09T13:40:07.693Z",
    "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "EffectiveEndDate": "2023-05-09T13:40:07.693Z",
    "EmployeePerPayCost": 0,
    "EmployeeDeductionScheduleCode": "string",
    "EmployeeAnnualCost": 0,
    "EmployerPerPayCost": 0,
    "EmployerDeductionScheduleCode": "string",
    "EmployerAnnualCost": 0,
    "CarrierPerPayCost": 0,
    "CarrierAnnualCost": 0,
    "EmployeeContributionAmount": 0,
    "EmployeeContributionPercentage": 0,
    "EmployerContributionAmount": 0,
    "EmployerContributionPercentage": 0,
    "CoverageAmount": 0,
    "CoverageMultiplier": 0,
    "RequestedCoverageAmount": 0,
    "PreAgeReducedCoverageAmount": 0,
    "EOIStatusCode": 0,
    "RateXrefCode": "string",
    "PlanStartDate": "2023-05-09T13:40:07.693Z",
    "ElectionDate": "2023-05-09T13:40:07.693Z",
    "PlanEndDate": "2023-05-09T13:40:07.693Z",
    "CareProviderDetails": [
      {
        "RecordType": "string",
        "ProviderIDQualifier": "string",
        "ProviderId": "string",
        "RelationshipCode": "string",
        "EntityIDCode": "string"
      }
    ]
  },
  "DependentDetails": [
    {
      "RecordType": "string",

```

```

"UniqueDependentId": 0,
"EmployeeNationalId": "string",
"NationalId": "string",
"NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
"FirstName": "string",
"MiddleName": "string",
"LastName": "string",
"DateOfBirth": "2023-05-09T13:40:07.693Z",
"GenderCode": 0,
"RelationshipCode": "string",
"MedicareStatusCode": 0,
"MedicareReasonCode": 0,
"StudentIndicator": true,
"DependentHandicapIndicator": true,
"DeathDate": "2023-05-09T13:40:07.693Z",
"EligibilityBeginDate": "2023-05-09T13:40:07.693Z",
"EligibilityEndDate": "2023-05-09T13:40:07.693Z",
"XRefCode": "string",
"TobaccoSubstanceUse": true,
"DateLastSmoked": "2023-05-09T13:40:07.693Z",
"Height": 0,
"Weight": 0,
"InitialNoticeFlag": true,
"SocialSecurityDisabilityAwardDate": "2023-05-09T13:40:07.693Z",
"DependentAge": 0,
"AddressDetails": [
  {
    "RecordType": "string",
    "AddressType": "string",
    "AddressLine1": "string",
    "AddressLine2": "string",
    "AddressLine3": "string",
    "City": "string",
    "County": "string",
    "StateCode": "string",
    "CountryCode": "string",
    "PostalCode": "string",
    "EffectiveStart": "2023-05-09T13:40:07.693Z",
    "EffectiveEnd": "2023-05-09T13:40:07.693Z"
  }
],

```

```

"ContactDetails": [
  {
    "RecordType": "string",
    "ContactInformation": "string",
    "CountryCode": "string",
    "ContactInformationCategoryCode": 0,
    "ContactInformationType": "string"
  }
],
"DependentElectionDetails": [
  {
    "RecordType": "string",
    "EmployeeElectionId": 0,
    "UniqueDependentId": 0,
    "PlanTypeCode": "string",
    "PlanSubTypeCode": "string",
    "PlanXrefCode": "string",
    "PlanCode": "string",
    "PolicyNumber": "string",
    "OptionCode": "string",
    "CoverageStartDate": "2023-05-09T13:40:07.693Z",
    "CoverageEndDate": "2023-05-09T13:40:07.693Z",
    "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "EffectiveEndDate": "2023-05-09T13:40:07.693Z",
    "PlanStartDate": "2023-05-09T13:40:07.693Z",
    "CareProviderDetails": [
      {
        "RecordType": "string",
        "ProviderIDQualifier": "string",
        "ProviderId": "string",
        "RelationshipCode": "string",
        "EntityIDCode": "string"
      }
    ]
  }
]
},
],
"BeneficiaryDetails": [
  {
    "RecordType": "string",

```

```

"UniqueBeneficiaryId": 0,
"EmployeeNationalId": "string",
"NationalId": "string",
"NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
"FirstName": "string",
"MiddleName": "string",
"LastName": "string",
"DateOfBirth": "2023-05-09T13:40:07.693Z",
"GenderCode": 0,
"RelationshipCode": "string",
"XRefCode": "string",
"HomePhoneNumber": "string",
"AddressDetails": [
  {
    "RecordType": "string",
    "AddressType": "string",
    "AddressLine1": "string",
    "AddressLine2": "string",
    "AddressLine3": "string",
    "City": "string",
    "County": "string",
    "StateCode": "string",
    "CountryCode": "string",
    "PostalCode": "string",
    "EffectiveStart": "2023-05-09T13:40:07.693Z",
    "EffectiveEnd": "2023-05-09T13:40:07.693Z"
  }
],
"ContactDetails": [
  {
    "RecordType": "string",
    "ContactInformation": "string",
    "CountryCode": "string",
    "ContactInformationCategoryCode": 0,
    "ContactInformationType": "string"
  }
],
"BeneficiaryElectionDetails": [
  {
    "RecordType": "string",
    "UniqueBeneficiaryId": 0,

```

```

    "PlanTypeCode": "string",
    "PlanSubTypeCode": "string",
    "PlanXrefCode": "string",
    "PlanCode": "string",
    "PolicyNumber": "string",
    "OptionCode": "string",
    "CoverageStartDate": "2023-05-09T13:40:07.693Z",
    "CoverageEndDate": "2023-05-09T13:40:07.693Z",
    "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "EffectiveEndDate": "2023-05-09T13:40:07.693Z",
    "PlanStartDate": "2023-05-09T13:40:07.693Z",
    "CareProviderDetails": [
      {
        "RecordType": "string",
        "ProviderIDQualifier": "string",
        "ProviderId": "string",
        "RelationshipCode": "string",
        "EntityIDCode": "string"
      }
    ]
  }
],
"BeneficiaryDetails": [
  {
    "RecordType": "string",
    "UniqueBeneficiaryId": 0,
    "EmployeeNationalId": "string",
    "NationalId": "string",
    "NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
    "FirstName": "string",
    "MiddleName": "string",
    "LastName": "string",
    "DateOfBirth": "2023-05-09T13:40:07.693Z",
    "GenderCode": 0,
    "RelationshipCode": "string",
    "XRefCode": "string",
    "HomePhoneNumber": "string",
    "AddressDetails": [
      {

```

```

        "RecordType": "string",
        "ProviderIDQualifier": "string",
        "ProviderId": "string",
        "RelationshipCode": "string",
        "EntityIDCode": "string"
    }
}
],
"DependentDetails": [
{
    "RecordType": "string",
    "UniqueDependentId": 0,
    "EmployeeNationalId": "string",
    "NationalId": "string",
    "NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
    "FirstName": "string",
    "MiddleName": "string",
    "LastName": "string",
    "DateOfBirth": "2023-05-09T13:40:07.693Z",
    "GenderCode": 0,
    "RelationshipCode": "string",
    "MedicareStatusCode": 0,
    "MedicareReasonCode": 0,
    "StudentIndicator": true,
    "DependentHandicapIndicator": true,
    "DeathDate": "2023-05-09T13:40:07.693Z",
    "EligibilityBeginDate": "2023-05-09T13:40:07.693Z",
    "EligibilityEndDate": "2023-05-09T13:40:07.693Z",
    "XRefCode": "string",
    "TobaccoSubstanceUse": true,
    "DateLastSmoked": "2023-05-09T13:40:07.693Z",
    "Height": 0,
    "Weight": 0,
    "InitialNoticeFlag": true,
    "SocialSecurityDisabilityAwardDate": "2023-05-09T13:40:07.693Z",
    "DependentAge": 0,
    "AddressDetails": [
        {
            "RecordType": "string",
            "AddressType": "string",

```



```

    "AddressLine1": "string",
    "AddressLine2": "string",
    "AddressLine3": "string",
    "City": "string",
    "County": "string",
    "StateCode": "string",
    "CountryCode": "string",
    "PostalCode": "string",
    "EffectiveStart": "2023-05-09T13:40:07.693Z",
    "EffectiveEnd": "2023-05-09T13:40:07.693Z"
  }
],
"ContactDetails": [
  {
    "RecordType": "string",
    "ContactInformation": "string",
    "CountryCode": "string",
    "ContactInformationCategoryCode": 0,
    "ContactInformationType": "string"
  }
],
"DependentElectionDetails": [
  {
    "RecordType": "string",
    "EmployeeElectionId": 0,
    "UniqueDependentId": 0,
    "PlanTypeCode": "string",
    "PlanSubTypeCode": "string",
    "PlanXrefCode": "string",
    "PlanCode": "string",
    "PolicyNumber": "string",
    "OptionCode": "string",
    "CoverageStartDate": "2023-05-09T13:40:07.693Z",
    "CoverageEndDate": "2023-05-09T13:40:07.693Z",
    "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "EffectiveEndDate": "2023-05-09T13:40:07.693Z",
    "PlanStartDate": "2023-05-09T13:40:07.693Z",
    "CareProviderDetails": [
      {
        "RecordType": "string",
        "ProviderIDQualifier": "string",

```

```

        "ProviderId": "string",
        "RelationshipCode": "string",
        "EntityIDCode": "string"
    }
]
}
]
},
"BeneficiaryDetails": [
{
    "RecordType": "string",
    "UniqueBeneficiaryId": 0,
    "EmployeeNationalId": "string",
    "NationalId": "string",
    "NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
    "FirstName": "string",
    "MiddleName": "string",
    "LastName": "string",
    "DateOfBirth": "2023-05-09T13:40:07.693Z",
    "GenderCode": 0,
    "RelationshipCode": "string",
    "XRefCode": "string",
    "HomePhoneNumber": "string",
    "AddressDetails": [
        {
            "RecordType": "string",
            "AddressType": "string",
            "AddressLine1": "string",
            "AddressLine2": "string",
            "AddressLine3": "string",
            "City": "string",
            "County": "string",
            "StateCode": "string",
            "CountryCode": "string",
            "PostalCode": "string",
            "EffectiveStart": "2023-05-09T13:40:07.693Z",
            "EffectiveEnd": "2023-05-09T13:40:07.693Z"
        }
    ],
    "ContactDetails": [

```

```

    {
      "RecordType": "string",
      "ProviderIDQualifier": "string",
      "ProviderId": "string",
      "RelationshipCode": "string",
      "EntityIDCode": "string"
    }
  ]
},
"DependentDetails": [
  {
    "RecordType": "string",
    "UniqueDependentId": 0,
    "EmployeeNationalId": "string",
    "NationalId": "string",
    "NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
    "FirstName": "string",
    "MiddleName": "string",
    "LastName": "string",
    "DateOfBirth": "2023-05-09T13:40:07.693Z",
    "GenderCode": 0,
    "RelationshipCode": "string",
    "MedicareStatusCode": 0,
    "MedicareReasonCode": 0,
    "StudentIndicator": true,
    "DependentHandicapIndicator": true,
    "DeathDate": "2023-05-09T13:40:07.693Z",
    "EligibilityBeginDate": "2023-05-09T13:40:07.693Z",
    "EligibilityEndDate": "2023-05-09T13:40:07.693Z",
    "XRefCode": "string",
    "TobaccoSubstanceUse": true,
    "DateLastSmoked": "2023-05-09T13:40:07.693Z",
    "Height": 0,
    "Weight": 0,
    "InitialNoticeFlag": true,
    "SocialSecurityDisabilityAwardDate": "2023-05-09T13:40:07.693Z",
    "DependentAge": 0,
    "AddressDetails": [
      {
        "RecordType": "string",

```

```

    "AddressType": "string",
    "AddressLine1": "string",
    "AddressLine2": "string",
    "AddressLine3": "string",
    "City": "string",
    "County": "string",
    "StateCode": "string",
    "CountryCode": "string",
    "PostalCode": "string",
    "EffectiveStart": "2023-05-09T13:40:07.693Z",
    "EffectiveEnd": "2023-05-09T13:40:07.693Z"
  }
],
"ContactDetails": [
  {
    "RecordType": "string",
    "ContactInformation": "string",
    "CountryCode": "string",
    "ContactInformationCategoryCode": 0,
    "ContactInformationType": "string"
  }
],
"DependentElectionDetails": [
  {
    "RecordType": "string",
    "EmployeeElectionId": 0,
    "UniqueDependentId": 0,
    "PlanTypeCode": "string",
    "PlanSubTypeCode": "string",
    "PlanXrefCode": "string",
    "PlanCode": "string",
    "PolicyNumber": "string",
    "OptionCode": "string",
    "CoverageStartDate": "2023-05-09T13:40:07.693Z",
    "CoverageEndDate": "2023-05-09T13:40:07.693Z",
    "EffectiveStartDate": "2023-05-09T13:40:07.693Z",
    "EffectiveEndDate": "2023-05-09T13:40:07.693Z",
    "PlanStartDate": "2023-05-09T13:40:07.693Z",
    "CareProviderDetails": [
      {
        "RecordType": "string",

```

```

        "ProviderIDQualifier": "string",
        "ProviderId": "string",
        "RelationshipCode": "string",
        "EntityIDCode": "string"
    }
]
}
]
}
],
"BeneficiaryDetails": [
{
    "RecordType": "string",
    "UniqueBeneficiaryId": 0,
    "EmployeeNationalId": "string",
    "NationalId": "string",
    "NationalIDExpiryDate": "2023-05-09T13:40:07.693Z",
    "FirstName": "string",
    "MiddleName": "string",
    "LastName": "string",
    "DateOfBirth": "2023-05-09T13:40:07.693Z",
    "GenderCode": 0,
    "RelationshipCode": "string",
    "XRefCode": "string",
    "HomePhoneNumber": "string",
    "AddressDetails": [
        {
            "RecordType": "string",
            "AddressType": "string",
            "AddressLine1": "string",
            "AddressLine2": "string",
            "AddressLine3": "string",
            "City": "string",
            "County": "string",
            "StateCode": "string",
            "CountryCode": "string",
            "PostalCode": "string",
            "EffectiveStart": "2023-05-09T13:40:07.693Z",
            "EffectiveEnd": "2023-05-09T13:40:07.693Z"
        }
    ]
},
],

```