

1/7 (from GPT-4-o)

Incorrect knowledge snippet 2: Set titles in the ActionBar using `getSupportActionBar()`, and ensure synchronization between ActionBar and any custom Toolbars.

API: ActionBar

Knowledge type: Pattern


Error came from: GPT-4-o

Why it is wrong: The post shows that the function to set title of the ActionBar is the `setTitle()`. `getSupportActionBar()` only returns an instance of ActionBar.

Source post: [75936073](#)

Post created: Apr 5, 2023

Screenshot of post:

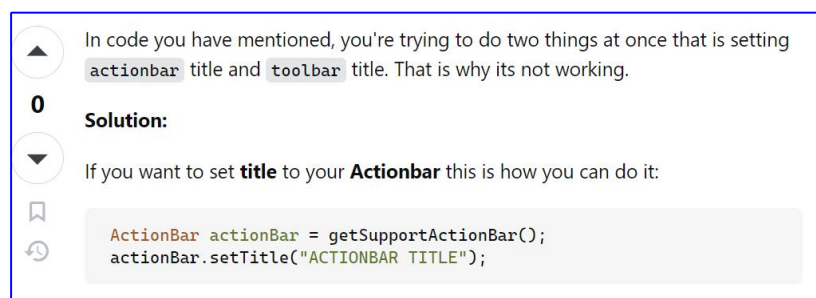

setTitle() is used to set title of ActionBar

2/7 (from SO post)

Incorrect knowledge snippet 1: Supports navigation and view switching using tabs or drop-down lists.

Knowledge type: Functionality

API: ActionBar

Error came from: SO post

Why it is wrong: This post quoted an outdated API document. After manually checking this document, we discover that the part where the author quoted has been modified in the official document. In current ActionBar, switching using tabs or drop-down lists has been deprecated.

Source post: [65551446](#)

Post created: Jan 3, 2021

Screenshot of post:

▲ As written in the google documentation
<https://developer.android.com/training/appbar>

2 ▼

🔖 "The app bar, also known as the action bar, is one of the most important design elements in your app's activities because it provides a visual structure and interactive elements that are familiar to users. [Pay attention to the point 'familiar to users'] Using the app bar makes your app consistent with other Android apps, allowing users to quickly understand how to operate your app and have a great experience. The key functions of the app bar are as follows:

🕒

1. A dedicated space for giving your app an identity and indicating the user's location in the app.
2. Access to important actions in a predictable way, such as search.
3. Support for navigation and view switching (with tabs or drop-down lists)."

The information in red box is outdated and has been removed in current official document

3/7 (from SO post)

Incorrect knowledge snippet: Their generation does not require system coordination, enhancing performance where distributed systems are involved.

API: UUID

Knowledge type: Pattern

Error came from: SO post

Why it is wrong: The SO post author made an inaccurate statement that generating UUID does not require any system coordination. It is not true because UUID version 1 is generated using the MAC address and timestamp. Therefore, unlike later versions of UUID, generating UUID version 1 requires some level of system coordination.

Source post: [73144845](https://stackoverflow.com/questions/73144845)

Post created: Jul 27, 2022

Screenshot of post:

▲ The point of UUIDs is that it doesn't matter who generates them and there is no state you need to worry about (i.e. the chance that 2 separate systems both generating random UUIDs happen to generate identical UUIDs, rounds down to zero). Hence, let MySQL generate it. Or let java generate it. Whatever is more convenient. There is no inherent drawback to either form.

4 ▼

🔖 Share Improve this answer Follow

answered Jul 27, 2022 at 21:30

👤 rzwtserlout

101k 6 67 92

Not necessarily true for UUID version 1

4/7 (from GPT-4-o)

Incorrect knowledge snippet: When configuring hardware acceleration, set `android:hardwareAccelerated="true"` in both the application and activity tags if graphic

performance enhancement is required throughout the app.

API: Manifest

Knowledge type: Directive


Error came from: GPT-4-o

Why it is wrong: The post said the developer only needs to set one of application and activity tags. However, in the extracted knowledge, GPT-4-o requires the user to set both tags to be true while only setting one is necessary.

Source post: [62668758](#)

Post created: Jul 1, 2022

Screenshot of post:

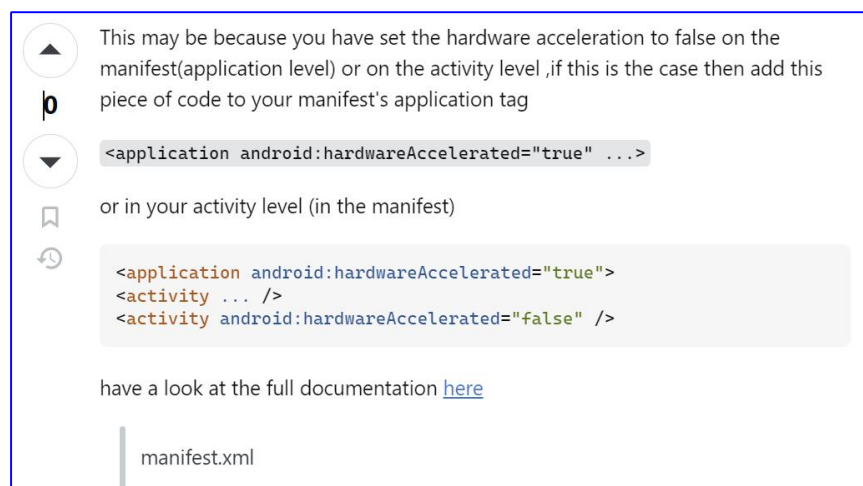

The author explicitly said "or"

5/7 (from DPR)

Incorrect knowledge snippet: Utilize `MediaController.getPlaybackState()` to verify the playback state, identifying which **MediaController** is currently active, either playing or buffering.

API: MediaPlayer

Knowledge type: Pattern


Error came from: DPR

Why it is wrong: The DPR model incorrectly retrieve this post for MediaPlayer. However, this post is about another API, namely MediaController.

Source post: [75930166](#)

Post created: Apr 4, 2023

Screenshot of post:

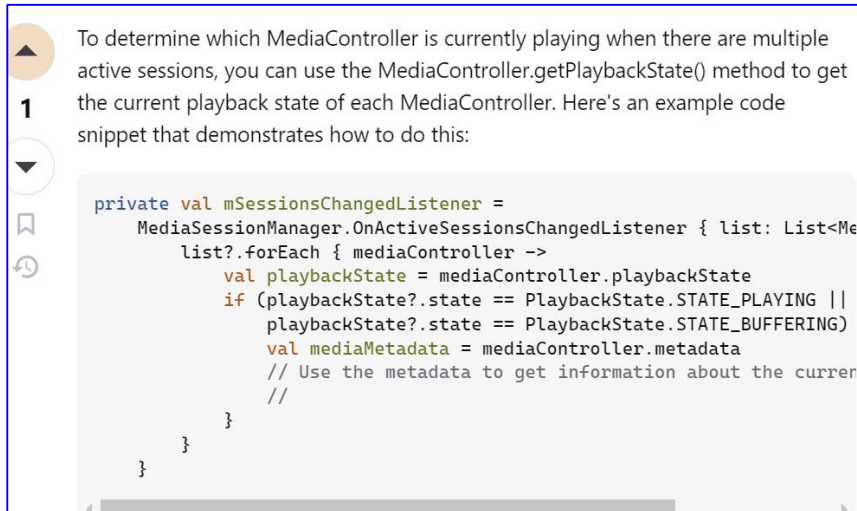

The post is not about MediaPlayer

6/7 (from DPR)

Incorrect knowledge snippet: Iterate over multiple `MediaController` instances, comparing their `PlaybackState` `lastPositionUpdateTime` to ascertain the most recent active session and update the current media controller accordingly.

API: MediaPlayer

Knowledge type: Pattern


Error came from: DPR

Why it is wrong: The DPR model incorrectly retrieve this post for MediaPlayer. However, this post is about another API, namely MediaController.

Source post: [75870736](#)

Post created: Mar 28, 2023

Screenshot of post:

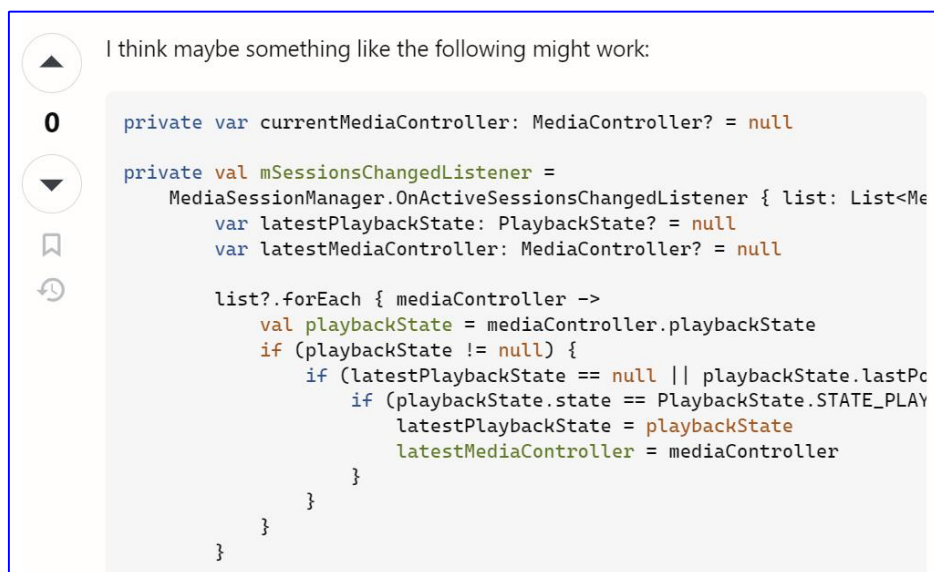

The post is not about MediaPlayer

7/7 (from DPR)

Incorrect knowledge snippet: Although `IllegalArgumentException` is commonly used for input validation, other conditional checks and exception types can be employed based on specific application needs. However, the `require` function remains a popular choice for its simplicity and direct integration with `IllegalArgumentException`.

API: `IllegalArgumentException`

Knowledge type: Alternative


Error came from: DPR

Why it is wrong: The DPR incorrectly retrieve this post for Alternative knowledge of `IllegalArgumentException`. However, this post does not mention alternative to `IllegalArgumentException`. It is a mistake made by the DPR model.

Source post: [75441047](#)

Post created: Feb 13, 2023

Screenshot of post:

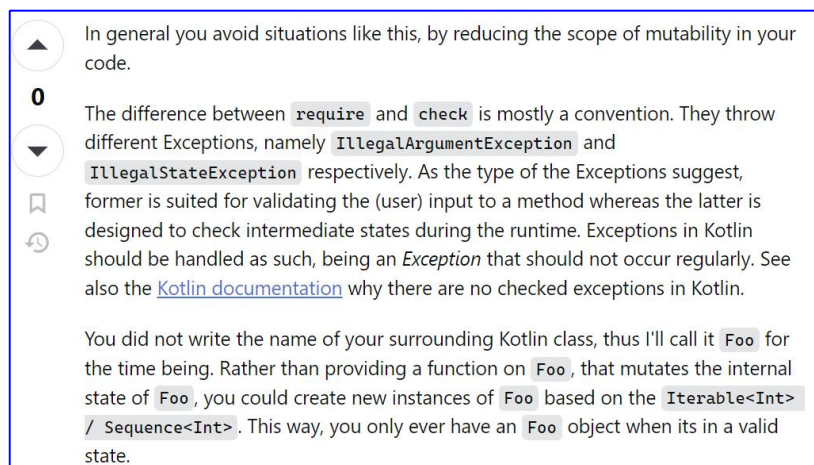

Not mentioning alternative to `IllegalArgumentException`