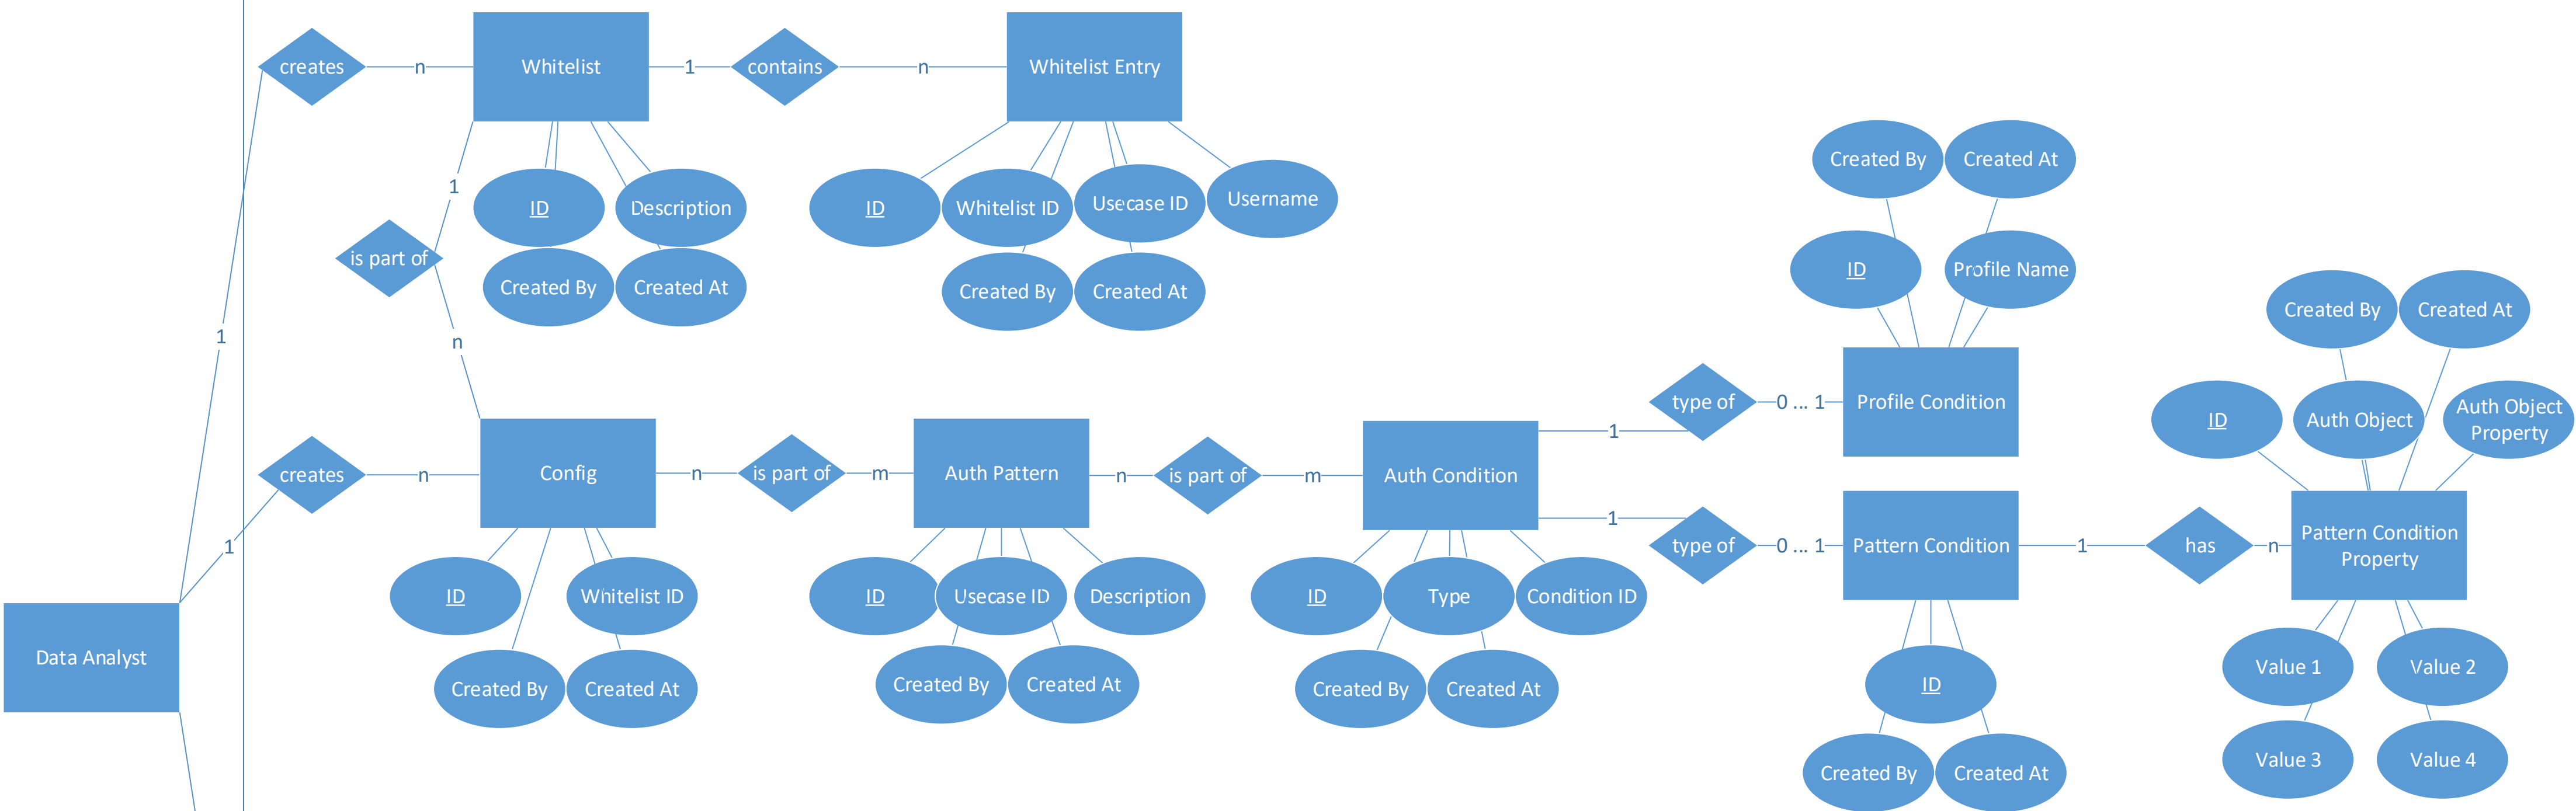# ART Local Database

Pattern / Whitelist Configuration

Data Analyst — creates (n) — Whitelist — 1 — contains (n) — Whitelist Entry

Whitelist attributes: ID, Description, Created By, Created At

Whitelist Entry attributes: ID, Whitelist ID, Usecase ID, Username, Created By, Created At

Data Analyst — is part of

Data Analyst — creates (n) — Config — n — is part of (m) — Auth Pattern — n — is part of (m) — Auth Condition

Config attributes: ID, Whitelist ID, Created By, Created At

Auth Pattern attributes: ID, Usecase ID, Description, Created By, Created At

Auth Condition attributes: ID, Type, Condition ID, Created By, Created At

Auth Condition — 1 — type of — 0 … 1 — Profile Condition

Profile Condition attributes: Created By, Created At, ID, Profile Name

Auth Condition — 1 — type of — 0 … 1 — Pattern Condition — 1 — has (n) — Pattern Condition Property

Pattern Condition attributes: ID, Created By, Created At

Pattern Condition Property attributes: Created By, Created At, ID, Auth Object, Auth Object Property, Value 1, Value 2, Value 3, Value 4

Pattern Analysis

Data Analyst — executes (n) — ART Query — 1 — contains (n) — Critical Access Entry

ART Query attributes: Created By, Created At, ID, Config ID

Critical Access Entry attributes: Created By, Created At, ID, Username, Auth Pattern ID

ART Query — n — used by (1) — Config History

Critical Access Entry — n — applies to (1) — Auth Pattern History

Config History — n — is part of (m) — Auth Pattern History — n — is part of (m) — Auth Condition History

Config History attributes: Created By, ID, Created At, Whitelist ID

Auth Pattern History attributes: ID, Usecase ID, Description, Created By, Created At

Auth Condition History attributes: ID, Type, Condition ID, Created By, Created At

Auth Condition History — 1 — type of — 0 … 1 — Profile Condition History

Profile Condition History attributes: Created By, Created At, ID, Profile Name

Auth Condition History — 1 — type of — 0 … 1 — Pattern Condition History — 1 — has — Pattern Condition Property History

Pattern Condition History attributes: ID, Created By, Created At

Pattern Condition Property History attributes: Created By, Created At, ID, Auth Object, Auth Object Property, Value 1, Value 2, Value 3, Value 4

Config History — n — is part of (1) — Whitelist History — 1 — contains (n) — Whitelist Entry History

Whitelist History attributes: ID, Description, Created By, Created At

Whitelist Entry History attributes: ID, Whitelist ID, Usecase ID, Username, Created By, Created At