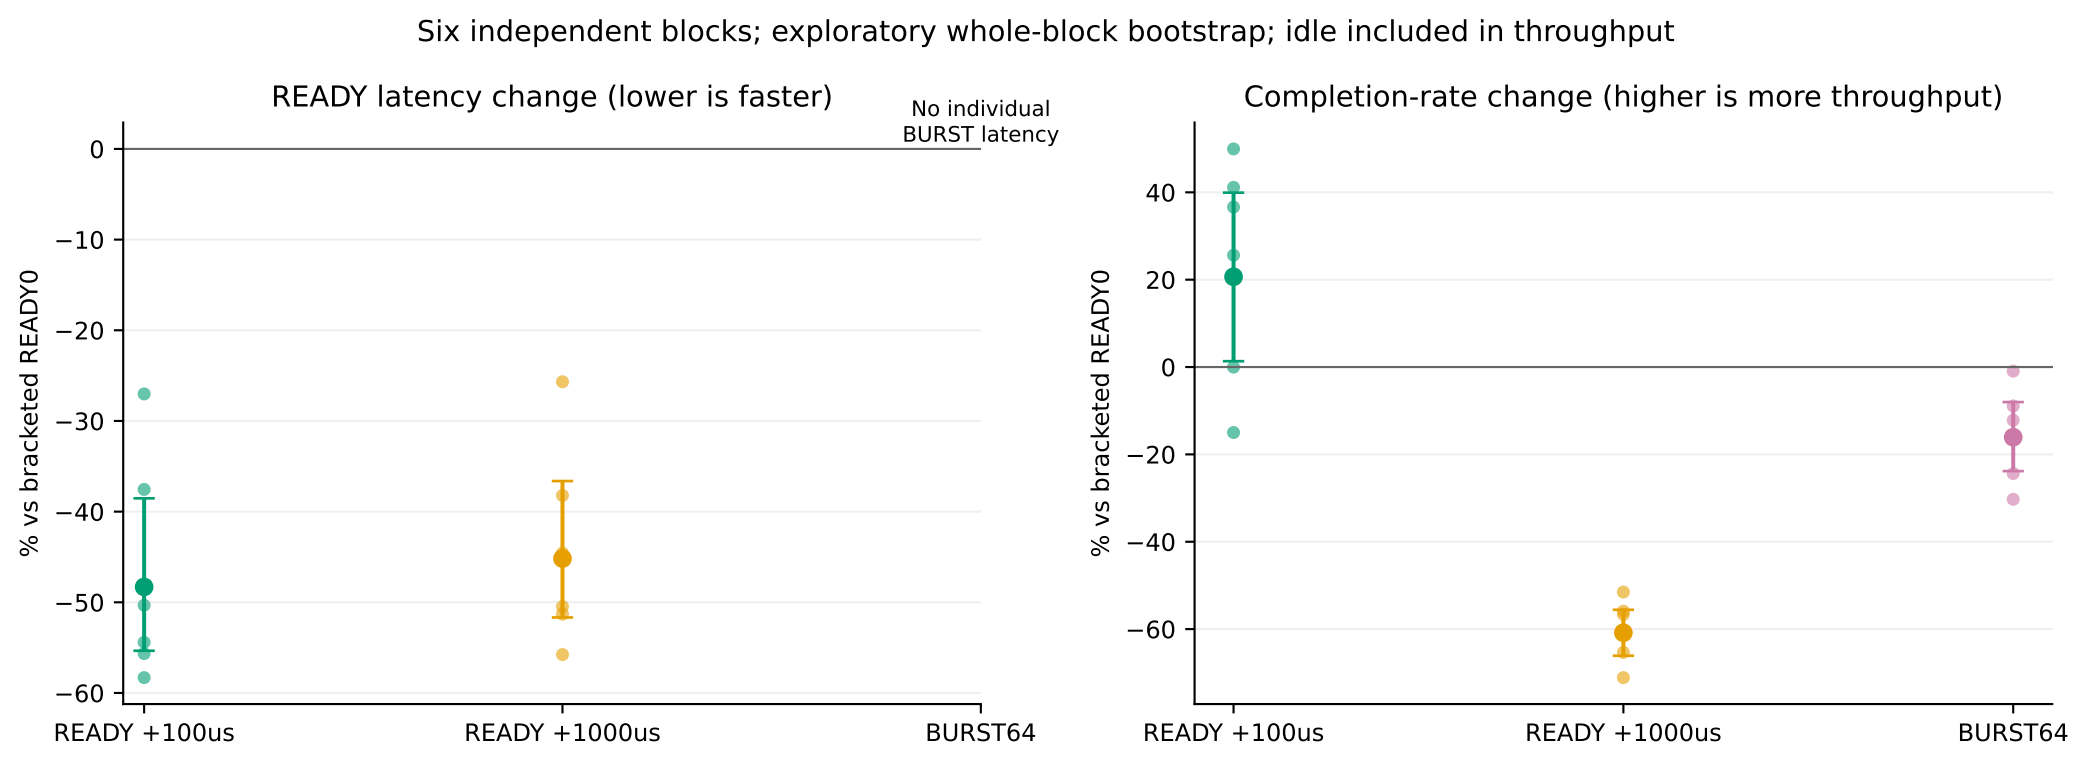
Six independent blocks; exploratory whole-block bootstrap; idle included in throughput
READY latency change (lower is faster)
No individual BURST latency
% vs bracketed READY0
0
−10
−20
−30
−40
−50
−60
READY +100us
READY +1000us
BURST64
Completion-rate change (higher is more throughput)
% vs bracketed READY0
40
20
0
−20
−40
−60
READY +100us
READY +1000us
BURST64