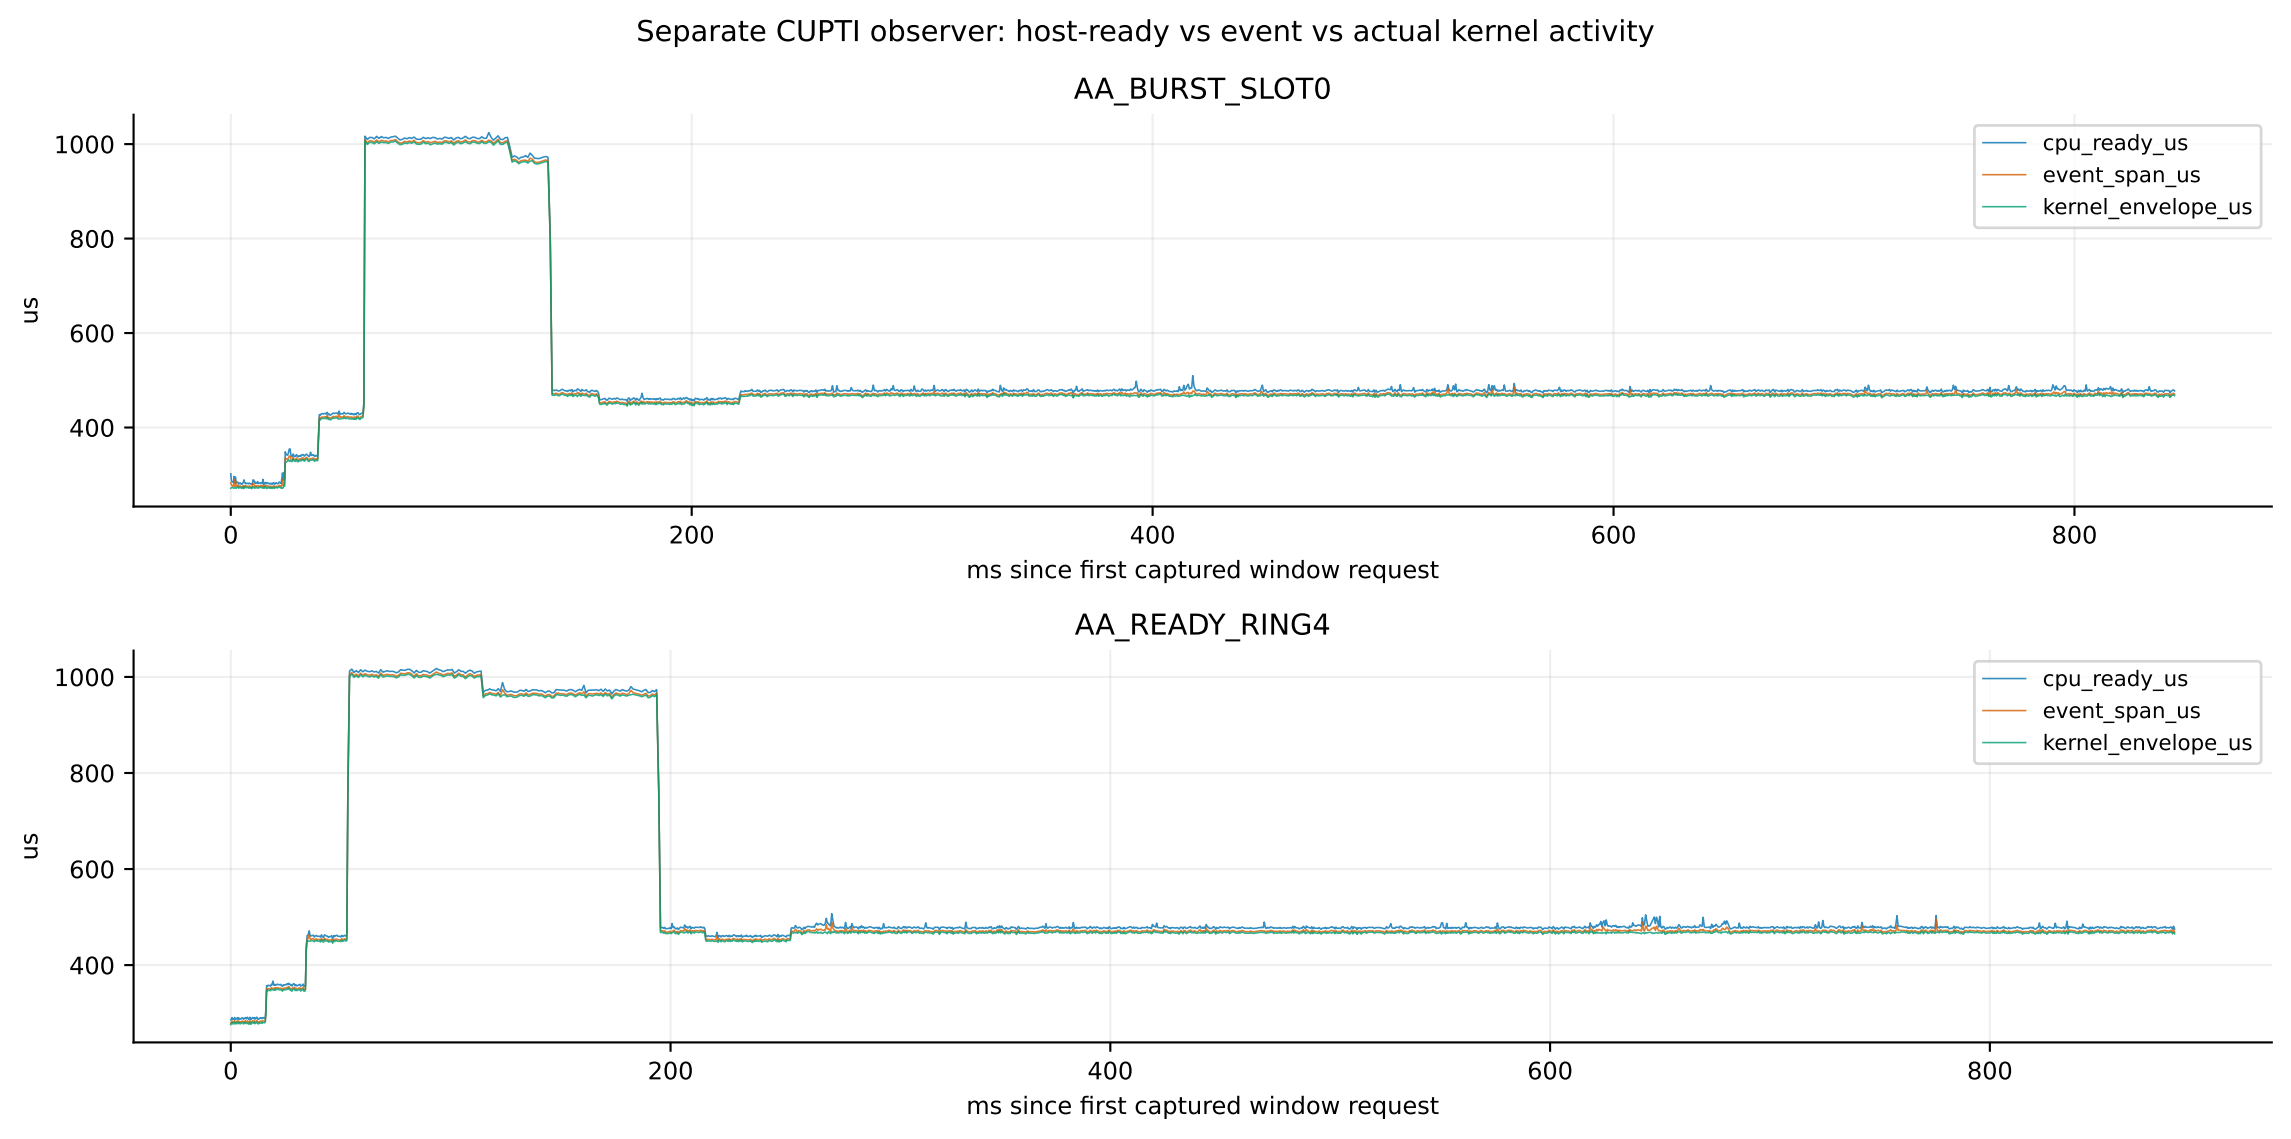

Separate CUPTI observer: host-ready vs event vs actual kernel activity
AA_BURST_SLOT0
cpu_ready_us
event_span_us
kernel_envelope_us
us
1000
800
600
400
0
200
400
600
800
ms since first captured window request
AA_READY_RING4
cpu_ready_us
event_span_us
kernel_envelope_us
us
1000
800
600
400
0
200
400
600
800
ms since first captured window request