



Инструкция по развертыванию веб-приложения «Мой участок»


1. Запустить VSC и открыть папку с проектом MyParcel

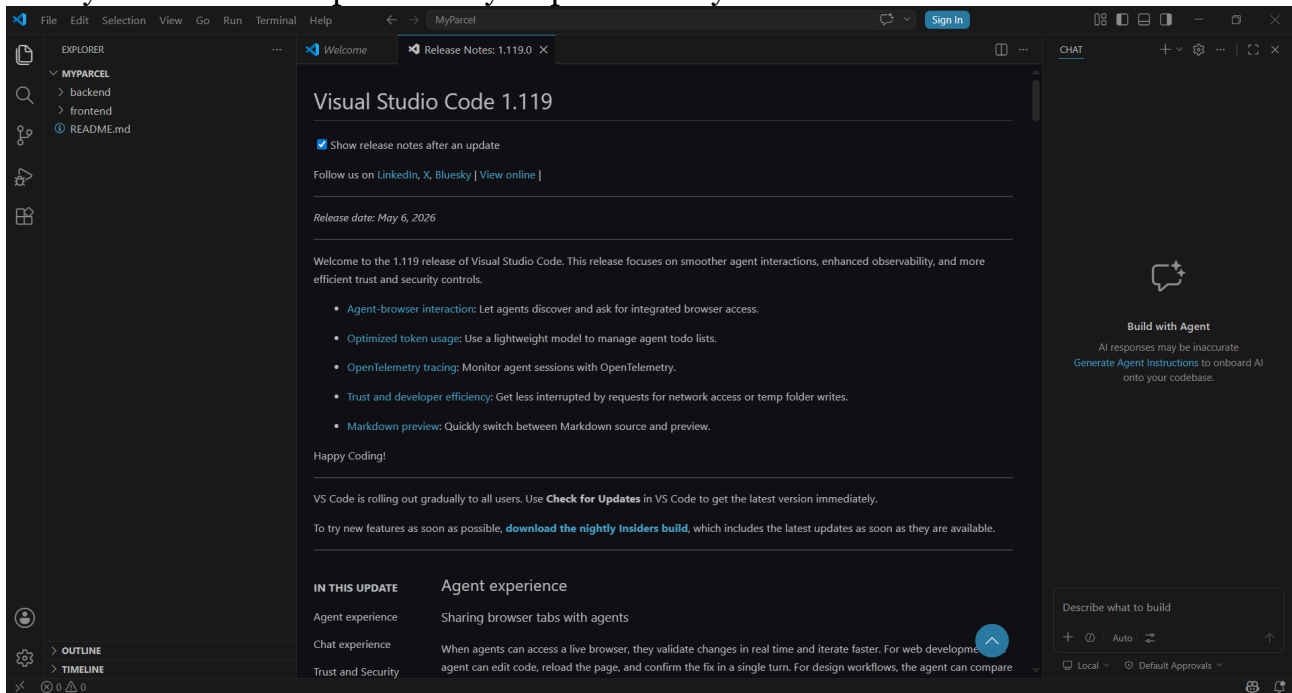

2. Запустить новый терминал

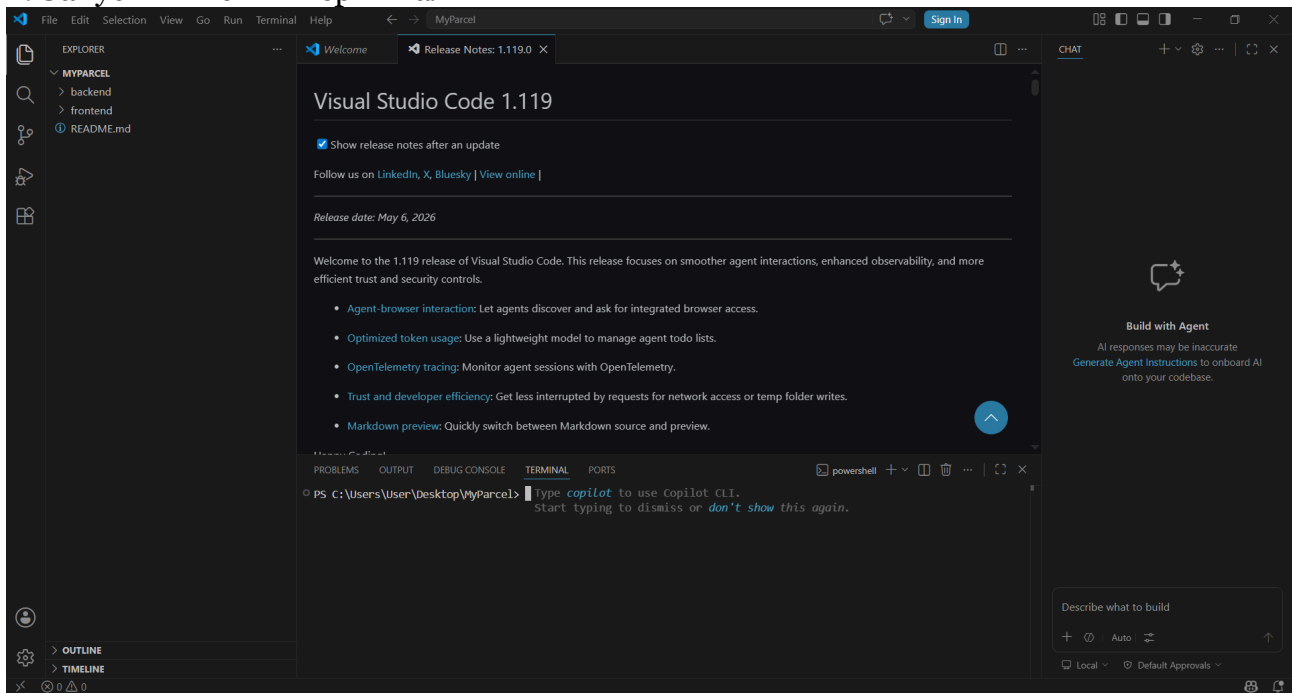

3. В терминале выполнить команду *cd backend*

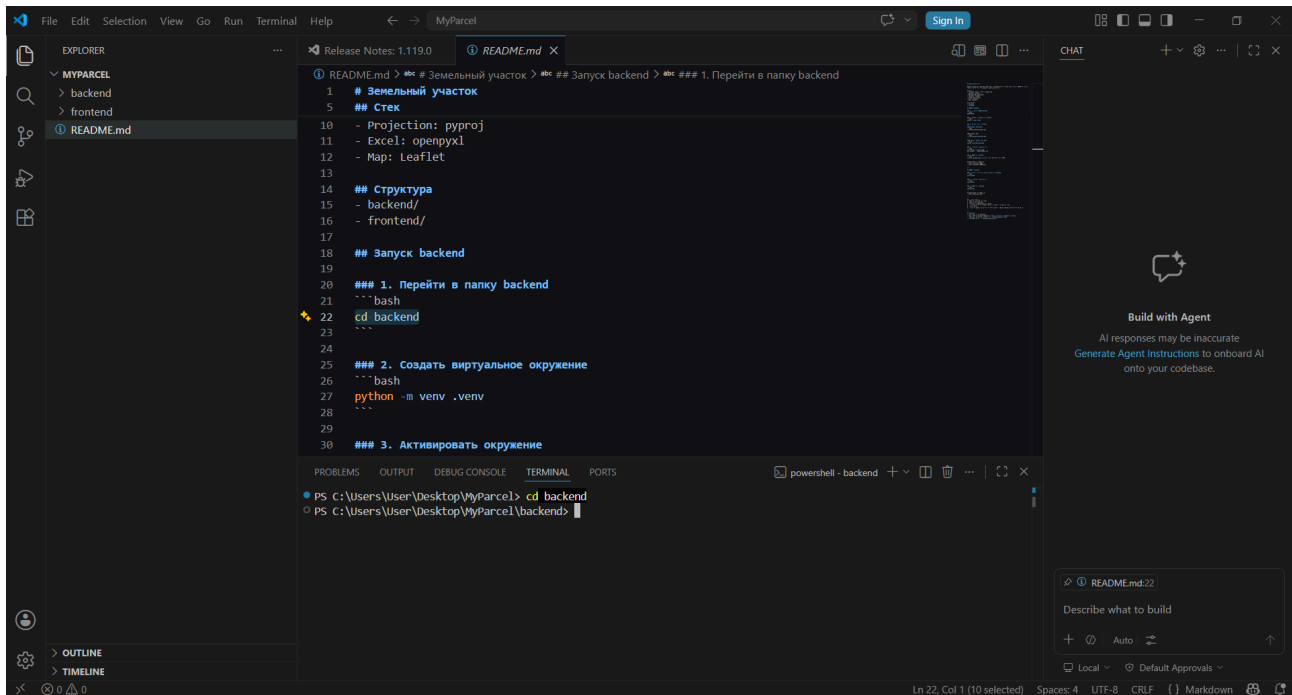


The screenshot shows the VS Code editor with the README.md file open. The file contains instructions for setting up the project. The terminal output shows the command `cd backend` being executed successfully.

```
1 # Земельный участок > * # Запуск backend > * ## 1. Перейти в папку backend
5 ## стек
10 - Projection: pyproj
11 - Excel: openpyxl
12 - Map: Leaflet
13
14 ## Структура
15 - backend/
16 - frontend/
17
18 ## Запуск backend
19
20 ## 1. Перейти в папку backend
21 --- bash
22 cd backend
23 ---
24
25 ## 2. Создать виртуальное окружение
26 --- bash
27 python -m venv .venv
28 ---
29
30 ## 3. Активировать окружение
```

Terminal output:

```
PS C:\Users\User\Desktop\MyParcel> cd backend
PS C:\Users\User\Desktop\MyParcel\backend>
```

4. Выполнить команду *python -m venv .venv*

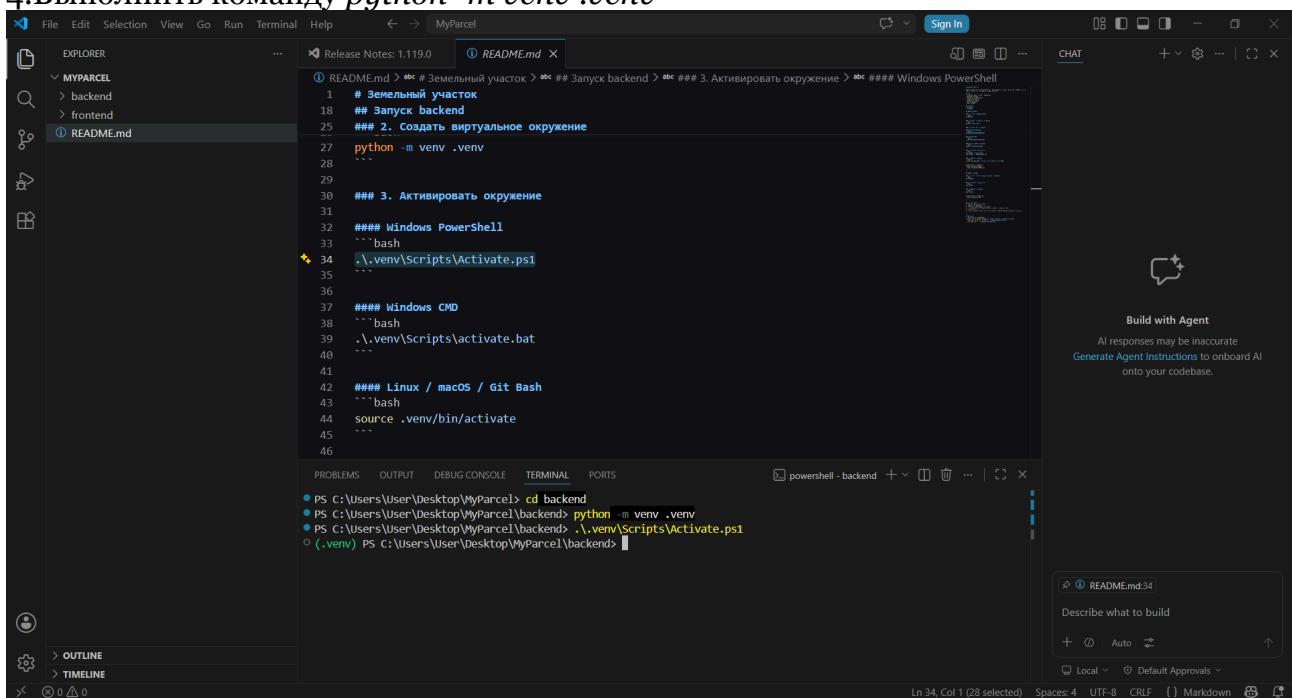


The screenshot shows the VS Code editor with the README.md file open. The file contains instructions for setting up the project. The terminal output shows the command `python -m venv .venv` being executed successfully.

```
1 # Земельный участок > * # Запуск backend > * ## 3. Активировать окружение > * #### Windows PowerShell
18 ## Запуск backend
25 ## 2. Создать виртуальное окружение
27 python -m venv .venv
28 ---
29
30 ## 3. Активировать окружение
31
32 #### Windows PowerShell
33 --- bash
34 .\venv\Scripts\Activate.ps1
35 ---
36
37 #### Windows CMD
38 --- bash
39 .\venv\Scripts\activate.bat
40 ---
41
42 #### Linux / macOS / Git Bash
43 --- bash
44 source .venv/bin/activate
45 ---
46
```

Terminal output:

```
PS C:\Users\User\Desktop\MyParcel> cd backend
PS C:\Users\User\Desktop\MyParcel\backend> python -m venv .venv
PS C:\Users\User\Desktop\MyParcel\backend> .\venv\Scripts\Activate.ps1
(.venv) PS C:\Users\User\Desktop\MyParcel\backend>
```


5. Выполнить команду `.\.venv\Scripts\Activate.ps1`

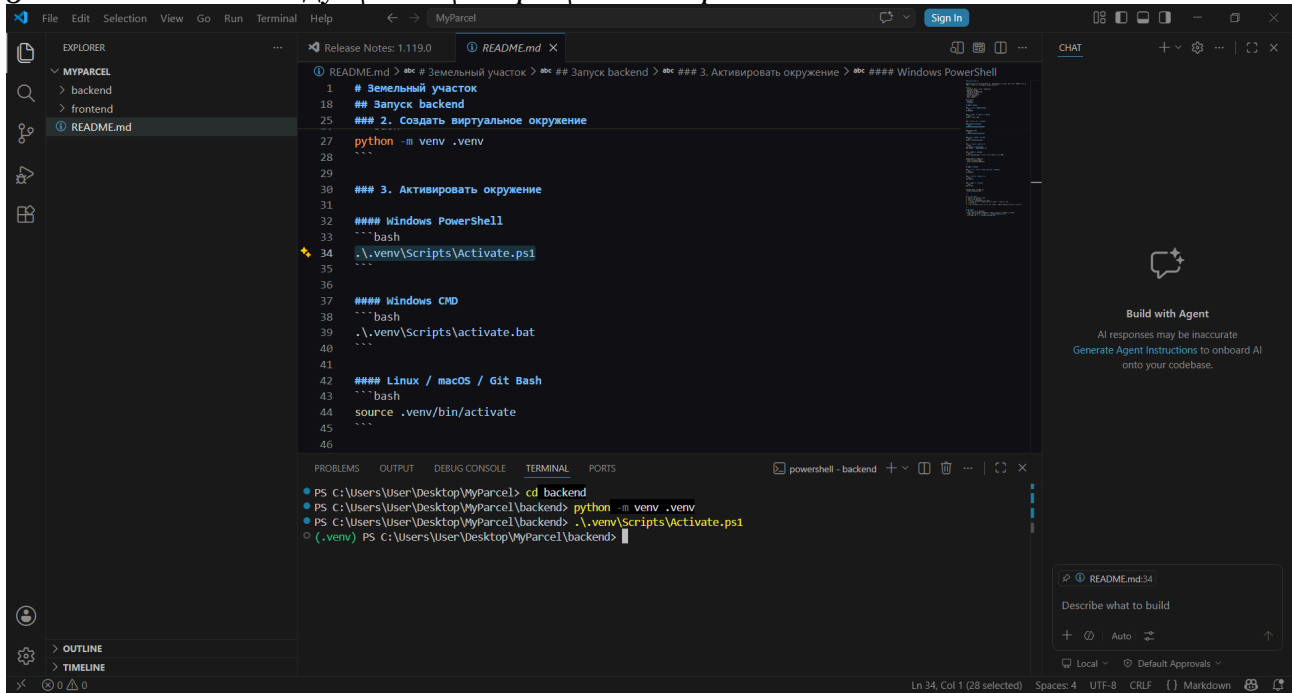

```
1  # Земельный участок > * ## Запуск backend > * ## 3. Активировать окружение > * ## Windows PowerShell
18 ## Запуск backend
25 ## 2. Создать виртуальное окружение
27 python -m venv .venv
28
29
30 ## 3. Активировать окружение
31
32 ##### Windows PowerShell
33 bash
34 \.venv\Scripts\Activate.ps1
35
36
37 ##### Windows CMD
38 bash
39 \.venv\Scripts\activate.bat
40
41
42 ##### Linux / macOS / Git Bash
43 bash
44 source .venv/bin/activate
45
46
```

```
PS C:\Users\User\Desktop\MyParcel> cd backend
PS C:\Users\User\Desktop\MyParcel\backend> python -m venv .venv
PS C:\Users\User\Desktop\MyParcel\backend> \.venv\Scripts\Activate.ps1
(.venv) PS C:\Users\User\Desktop\MyParcel\backend>
```

6. Выполнить команду `{base}\MyParcel\backend\.venv\Scripts\python.exe -m pip install --upgrade pip` вместо {base} необходимо указать путь до файла `\MyParcel\backend\.venv\Scripts\python.exe`

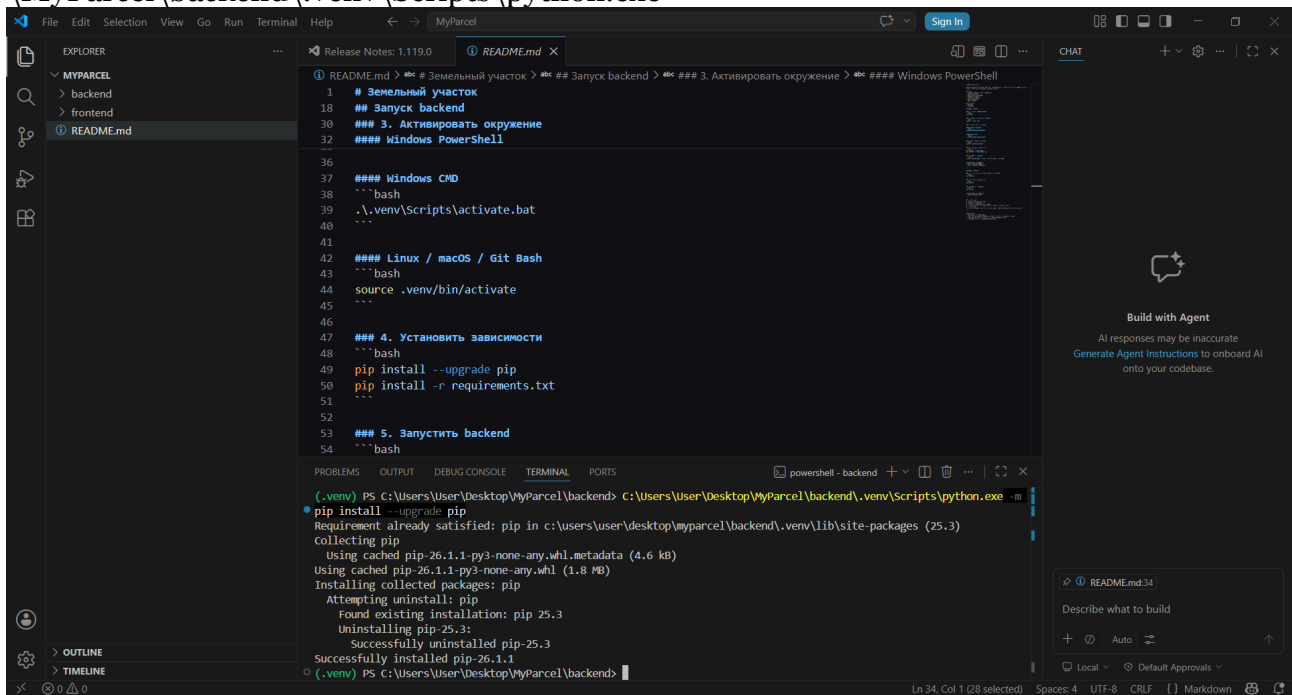

```
1  # Земельный участок > * ## Запуск backend > * ## 3. Активировать окружение > * ## Windows PowerShell
18 ## Запуск backend
30 ## 3. Активировать окружение
32 ##### Windows PowerShell
36
37 ##### Windows CMD
38 bash
39 \.venv\Scripts\activate.bat
40
41
42 ##### Linux / macOS / Git Bash
43 bash
44 source .venv/bin/activate
45
46
47 ## 4. Установить зависимости
48 bash
49 pip install --upgrade pip
50 pip install -r requirements.txt
51
52
53 ## 5. Запустить backend
54 bash
```

```
(.venv) PS C:\Users\User\Desktop\MyParcel\backend> C:\Users\User\Desktop\MyParcel\backend\.venv\Scripts\python.exe -m pip install --upgrade pip
Requirement already satisfied: pip in c:\users\user\desktop\myparcel\backend\.venv\lib\site-packages (25.3)
Collecting pip
  Using cached pip-26.1.1-py3-none-any.whl.metadata (4.6 kB)
Using cached pip-26.1.1-py3-none-any.whl (1.8 MB)
Installing collected packages: pip
  Attempting uninstall: pip
    Found existing installation: pip 25.3
    Uninstalling pip-25.3:
      Successfully uninstalled pip-25.3
  Successfully installed pip-26.1.1
(.venv) PS C:\Users\User\Desktop\MyParcel\backend>
```

7. Выполнить команду `pip install -r requirements.txt`

The screenshot shows the VS Code interface with the 'README.md' file open. The file contains instructions for setting up the environment. The terminal window shows the execution of the command `pip install -r requirements.txt` in a virtual environment. The output lists the installed packages and their versions.

```
1 # Земельный участок > ## ## Запуск backend > ### 4. Установить зависимости
18 ## ## Запуск backend
30 ### 3. Активировать окружение
32 ##### Windows PowerShell
36
37 ##### Windows CMD
38 ```bash
39 .\venv\Scripts\activate.bat
40 ```
41
42 ##### Linux / macOS / Git Bash
43 ```bash
44 source .venv/bin/activate
45 ```
46
47 ### 4. Установить зависимости
48 ```bash
49 pip install --upgrade pip
50 pip install -r requirements.txt
51 ```
52
53 ### 5. Запустить backend
54 ```bash
```

```
(.venv) PS C:\Users\User\Desktop\MyParcel\backend> pip install -r requirements.txt
Using cached pyparser-3.0-py3-none-any.whl (49 kB)
Installing collected packages: websockets, typing-extensions, pyyaml, python-multipart, python-dotenv, pydantic, pyparser, Pillow, numpy, idna, httptools, h11, et-xmlfile, colorama, charset-normalizer, certifi, annotated-types, annotated-doc, typing-inspection, shapely, pyproj, pydantic-core, openpyxl, click, cffi, anyio, watchfiles, uvicorn, starlette, pydantic, cryptography, pydantic-settings, pdfminer.six, fastapi, pdfplumber
Successfully installed Pillow-12.2.0 annotated-doc-0.0.4 annotated-types-0.7.0 anyio-4.13.0 certifi-2026.4.22 cffi-2.0.0 charset-normalizer-3.4.7 click-8.3.3 colorama-0.4.6 cryptography-48.0.0 et-xmlfile-2.0.0 fastapi-0.136.1 h11-0.16.0 httptools-0.7.1 idna-3.14 numpy-2.4.4 openpyxl-3.1.5 pdfminer.six-20251230 pdfplumber-0.11.9 pyparser-3.0 pydantic-2.13.4 pydantic-core-2.46.4 pydantic-settings-2.14.1 pypdfium2-5.8.0 pyproj-3.7.2 python-dotenv-1.2.2 python-multipart-0.0.28 pyyaml-6.0.3 shapely-2.1.2 starlette-1.0.0 typing-extensions-4.15.0 typing-inspection-0.4.2 uvicorn-0.46.0 watchfiles-1.1.1 websockets-16.0
(.venv) PS C:\Users\User\Desktop\MyParcel\backend>
```


8. Выполнить команду `uvicorn app.main:app --reload --host 0.0.0.0 --port 8000`

The screenshot shows the VS Code interface with the 'README.md' file open. The file contains instructions for setting up the environment. The terminal window shows the execution of the command `uvicorn app.main:app --reload --host 0.0.0.0 --port 8000` in a virtual environment. The output shows the application starting and listening on port 8000.

```
1 # Земельный участок > ## ## Запуск backend > ### 5. Запустить backend
18 ## ## Запуск backend
30 ### 3. Активировать окружение
42 ##### Linux / macOS / Git Bash
44 source .venv/bin/activate
45 ```
46
47 ### 4. Установить зависимости
48 ```bash
49 pip install --upgrade pip
50 pip install -r requirements.txt
51 ```
52
53 ### 5. Запустить backend
54 ```bash
55 uvicorn app.main:app --reload --host 0.0.0.0 --port 8000
56 ```
57
58 Backend будет доступен на:
59 - http://localhost:8000
60 - http://localhost:8000/docs
61
62 ---
```

```
(.venv) PS C:\Users\User\Desktop\MyParcel\backend> pip install -r requirements.txt
(.venv) PS C:\Users\User\Desktop\MyParcel\backend> uvicorn app.main:app --reload --host 0.0.0.0 --port 8000
INFO: Will watch for changes in these directories: ['C:\Users\User\Desktop\MyParcel\backend']
INFO: Uvicorn running on http://0.0.0.0:8000 (Press CTRL+C to quit)
INFO: Started reloader process [26590] using Watchfiles
INFO: Started server process [26592]
INFO: Waiting for application startup.
INFO: Application startup complete.
```

9. Открыть второе окно в терминале

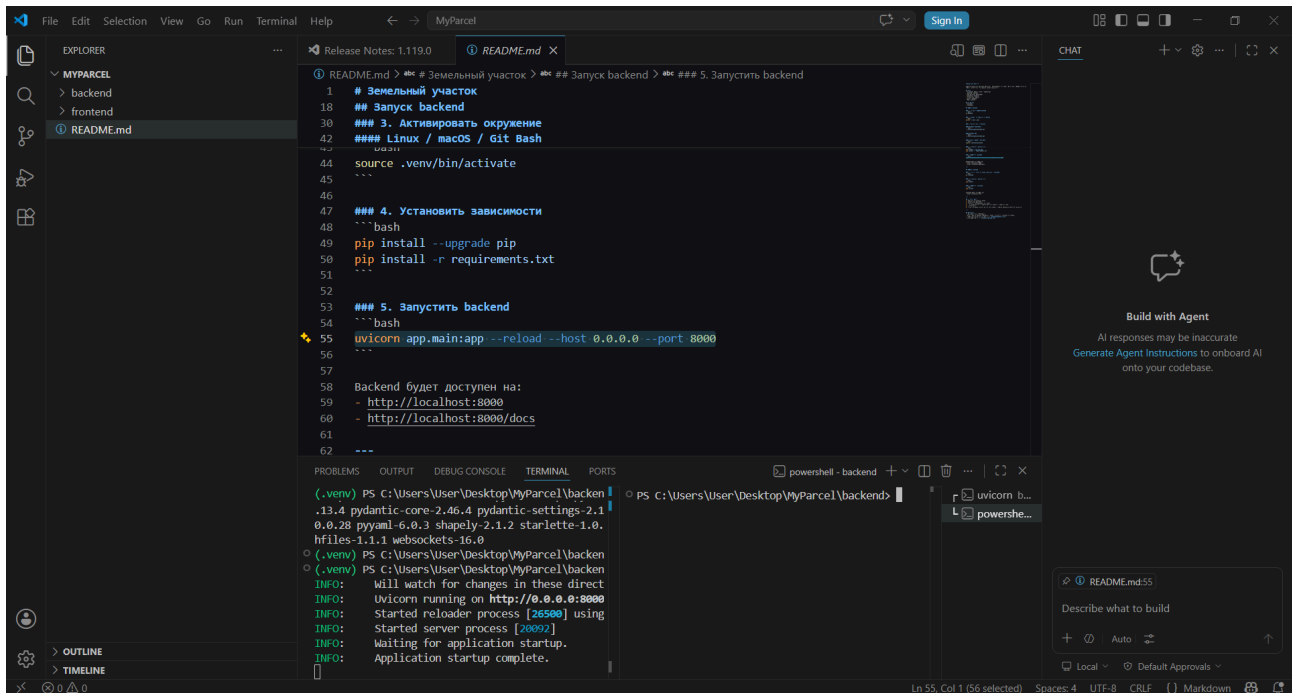


The screenshot shows the VS Code interface with the Explorer on the left showing the project structure: `MyParcel` (root), `backend`, `frontend`, and `README.md`. The main editor displays the `README.md` file with instructions for setting up the backend. The terminal at the bottom has two windows: `powershell - backend` and `powershell - frontend`. The `backend` window shows the command `uvicorn app.main:app --reload --host 0.0.0.0 --port 8000` being executed, and the `frontend` window is currently empty. The status bar at the bottom indicates the current file is `README.md:55`.

```
1 # Земельный участок > ## Запуск backend > ## 5. Запустить backend
18 ## Запуск backend
30 ### 3. Активировать окружение
42 ##### Linux / macOS / Git Bash
44 source .venv/bin/activate
45 ---
46
47 ### 4. Установить зависимости
48 --- bash
49 pip install --upgrade pip
50 pip install -r requirements.txt
51 ---
52
53 ### 5. Запустить backend
54 --- bash
55 uvicorn app.main:app --reload --host 0.0.0.0 --port 8000
56 ---
57
58 Backend будет доступен на:
59 - http://localhost:8000
60 - http://localhost:8000/docs
61
62 ---

(.venv) PS C:\Users\User\Desktop\MyParcel\backend> PS C:\Users\User\Desktop\MyParcel\backend>
PS C:\Users\User\Desktop\MyParcel\backend> uvicorn b...
PS C:\Users\User\Desktop\MyParcel\backend> powershe...
```

10. Выполнить команду `{base}\MyParcel\frontend` вместо `{base}` необходимо указать путь до папки frontend

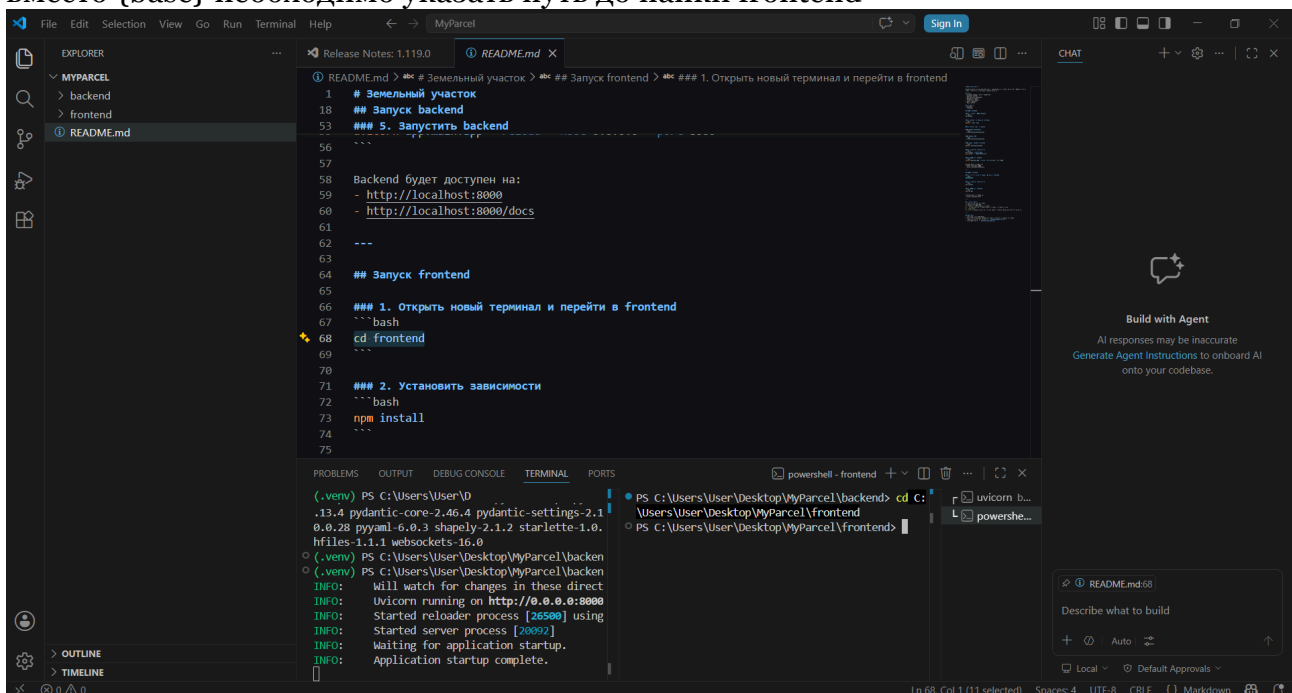

The screenshot shows the VS Code interface with the Explorer on the left showing the project structure: `MyParcel` (root), `backend`, `frontend`, and `README.md`. The main editor displays the `README.md` file with instructions for setting up the frontend. The terminal at the bottom has two windows: `powershell - backend` and `powershell - frontend`. The `backend` window shows the command `uvicorn app.main:app --reload --host 0.0.0.0 --port 8000` being executed, and the `frontend` window shows the command `cd frontend` being executed. The status bar at the bottom indicates the current file is `README.md:68`.

```
1 # Земельный участок > ## Запуск frontend > ## 1. Открыть новый терминал и перейти в frontend
18 ## Запуск backend
53 ### 5. Запустить backend
56 ---
57
58 Backend будет доступен на:
59 - http://localhost:8000
60 - http://localhost:8000/docs
61
62 ---
63
64 ## Запуск frontend
65
66 ### 1. Открыть новый терминал и перейти в frontend
67 --- bash
68 cd frontend
69 ---
70
71 ### 2. Установить зависимости
72 --- bash
73 npm install
74 ---
75

(.venv) PS C:\Users\User\Desktop\MyParcel\backend> PS C:\Users\User\Desktop\MyParcel\backend> cd C:\Users\User\Desktop\MyParcel\frontend
PS C:\Users\User\Desktop\MyParcel\frontend> PS C:\Users\User\Desktop\MyParcel\frontend>
PS C:\Users\User\Desktop\MyParcel\frontend> powershe...
```

11. Выполнить команду npm install

The screenshot shows the Visual Studio Code interface with a project named 'MyParcel'. The Explorer panel on the left shows the file structure with 'backend' and 'frontend' folders. The main editor displays a README.md file with instructions in Russian. The terminal window at the bottom shows the execution of 'npm install' in the 'frontend' directory. The output indicates that 120 packages were added and 121 packages were audited. A warning about a deprecated prebuild-install is also visible. The right sidebar shows a 'Build with Agent' button and a chat window.

```
Release Notes: 1.119.0
1 # Земельный участок > ## Запуск frontend > ### 2. Установить зависимости
18 ## Запуск backend
53 ### 5. Запустить backend
61 ---
62 ---
63 ---
64 ## Запуск frontend
65 ---
66 ### 1. Открыть новый терминал и перейти в frontend
67 *** bash
68 cd frontend
69 ***
70 ---
71 ### 2. Установить зависимости
72 *** bash
73 npm install
74 ***
75 ---
76 ### 3. Запустить frontend
77 *** bash
78 npm run dev
79 ***
80 ---

PS C:\Users\User\Desktop\MyParcel\frontend> npm install
install
npm warn deprecated prebuild-install@7.1.3: No longer active.
added 120 packages, and audited 121 packages in 25s
22 packages are looking for funding
run 'npm fund' for details
found 0 vulnerabilities
PS C:\Users\User\Desktop\MyParcel\frontend>
```

12. Выполнить команду npm run dev

The screenshot shows the Visual Studio Code interface with the same project. The terminal window now shows the execution of 'npm run dev' in the 'frontend' directory. The output indicates that the application is running on http://0.0.0.0:8080. A message in Russian states that the frontend will be available at http://localhost:5173. The right sidebar shows the 'Build with Agent' button and the chat window.

```
PS C:\Users\User\Desktop\MyParcel\frontend> npm run dev
run dev

Frontend будет доступен на:
- http://localhost:5173

## Порядок работы
1. Выберите систему координат.
2. Нажмите загрузку PDF.

PS C:\Users\User\Desktop\MyParcel\frontend>
```

13. Открыть страницу с приложением в браузере <http://localhost:5173>

