
VIS Documentation

Release 0.1

Sami-Matias Niemi

November 02, 2012

CONTENTS

1	Installation	3
1.1	Dependencies	3
2	Instrument Model	5
2.1	VIS Instrument Model	5
2.2	Instrument Characteristics	7
3	Exposure Times	13
3.1	Exposure Time Calculator	13
4	Creating Object Catalogs	17
4.1	Generating Object Catalogue	17
5	Creating Simulated Mock Images	21
5.1	Simulation tools	21
6	Data reduction	33
6.1	Data reduction tools	33
6.2	VIS data reduction studies	34
7	Data Analysis	41
7.1	VIS data analysis tools	41
8	Charge Transfer Inefficiency	49
8.1	Fortran code for CTI	49
9	Supporting methods and files	51
9.1	Objects	51
9.2	Code	51
10	Photometric Accuracy	53
11	Indices and tables	57
	Python Module Index	59
	Index	61

Author Sami-Matias Niemi

Contact smn2@mssl.ucl.ac.uk

version 1.01

This Python package provides subpackages and methods related to generating mock data and reducing it, the main consideration being the visible instrument (VIS) that is being developed for the the Euclid telescope. The subpackages include methods to e.g. generate object catalogues, simulate VIS images, study radiation damage effects and fit new trap species, reduce and analyse data, and to include instrumental characteristics such as readout noise and CTI to “pristine” images generated with e.g. the GREAT10 photon shooting code. In addition, an algorithm to measure ellipticities of galaxies is also provided. Thus, this package tries to provide an end-to-end simulation chain for the VIS instrument.

INSTALLATION

The VIS Python package is held in a GIT repository. You can download or fork the repository [here](#). The package contains a mixture of classes and scripts divided in subpackages based on the usage. Unfortunately, there is no official or preferred installation instructions yet. To get most scripts working you should place the path to the root directory of the package to your PYTHONPATH environment variable. In addition, it is useful to compile the Fortran code available in the fortran subdirectory with the following command:

```
f2py -c -m cdm03 cdm03.f90
```

and then copy the .so file to the CTI directory. Please note that f2py is available in the NumPy package, but you still need for example gFortran compiler to actually compile the Fortran source.

1.1 Dependencies

The VIS Python package depends heavily on other Python packages such as NumPy, SciPy, PyFITS, and matplotlib. Thus it is recommended that one installs a Python distribution like [Enthought Python](#), which installs all dependencies at once.

INSTRUMENT MODEL

The *support* subpackage contains functions that define the VIS instrument model. This model contains information about noise, dark, cosmic rays, radiation damage parameters, sky background, and pixel scale. For the Python documentation, please see:

2.1 VIS Instrument Model

The file provides a function that returns VIS related information such as pixel size, dark current, gain, zeropoint, and sky background.

requires NumPy

requires numexpr

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.4

`support.VISinstrumentModel.CCDnonLinearityModel` (*data*)

This function provides a non-linearity model for a VIS CCD273.

The non-linearity is modelled based on the results presented in MSSL/Euclid/TR/12001 issue 2. Especially Fig. 5.6, 5.7, 5.9 and 5.10 were used as an input data. The shape of the non-linearity is assumed to follow a parabola (although this parabola has a break, see the note below). The MSSL report indicates that the residual non-linearity is on the level of +/-25 DN or about +/- 0.04 per cent over the measured range. This function tries to duplicate this effect.

Note: There is a break in the model around 22000e. This is because the non-linearity measurements performed thus far are not extremely reliable below 10ke (< 0.5s exposure). However, the assumption is that at low counts the number of excess electrons appearing due to non-linearity should not be more than a few.

Parameters *data* (*ndarray*) – data to which the non-linearity model is being applied to

Returns input data after conversion with the non-linearity model

Return type float or ndarray

```
support.VISinstrumentModel.CCDnonLinearityModelSinusoidal(data,  
                                                         am-  
                                                         pli-  
                                                         tude,  
                                                         phase=0.49,  
                                                         multi=1.5)
```

This function provides a theoretical non-linearity model based on sinusoidal error with a given amplitude, phase and number of waves (multi).

Parameters

- **data** (*ndarray*) – data to which the non-linearity model is being applied to
- **amplitude** (*float*) – amplitude of the sinusoidal wave
- **phase** (*float*) – phase of the sinusoidal wave
- **multi** (*float*) – the number of waves to have over the dynamical range of the CCD

Returns input data after conversion with the non-linearity model

Return type ndarray

```
support.VISinstrumentModel.VISinformation()
```

Returns a dictionary describing VIS. The following information is provided:

```
'beta': 0.6  
'bias': 1000.0  
'cosmic_bkgd': 0.172  
'dark': 0.001  
'diameter': 1.3  
'dob': 0  
'e_adu': 3.5  
'fullwellcapacity': 200000  
'fwc': 175000  
'gain': 3.5  
'galaxy_fraction': 0.836  
'magzero': 17059000000.0  
'ovrscanx': 20  
'peak_fraction': 0.261179  
'pixel_size': 0.1  
'prescanx': 50  
'rdose': 30000000000.0  
'readnoise': 4.5  
'readout': 4.5  
'readtime': 88.0  
'sfwc': 730000.0  
'sky_background': 22.34
```

```
'sky_high': 21.74
'sky_low': 22.94
'st': 5e-06
'star_fraction': 0.928243
'svg': 1e-10
't': 0.01024
'trapfile': 'cdm_euclid.dat'
'vg': 6e-11
'vth': 11680000.0
'xsize': 2048
'ysize': 2066
'zeropoint': 25.58
'zodiacal': 22.942
```

The zeropoint was calculatd as follows:

```
1./10**(-0.4*(25.57991044453)) = 1.705942e+10
```

Returns instrument model parameters

Return type dict

`support.VISinstrumentModel.testNonLinearity()`
A simple test to plot the current non-linearity model.

2.2 Instrument Characteristics

The *postproc* subpackage contains methods related to either generating a CCD mosaics from simulated data that is in quadrants like the VIS reference simulator produces or including instrument characteristics to simulated images that contain only Poisson noise and background. For more detailed documentation of the Python classes, please see:

2.2.1 Postprocessing Tools

Inserting instrument characteristics

This file provides a class to insert instrument specific features to a simulated image. The VIS instrument model is taken from `support.VISinstrumentModel.VISinformation` function.

The class supports multiprocessing.

Note: The output images will be compressed with gzip to save disk space.

Warning: The logging module used does not work well with multiprocessing, but starts to write multiple entries after a while. This should be fixed.

requires PyFITS

requires NumPy

requires CDM03 (FORTRAN code, `f2py -c -m cdm03 cdm03.f90`)

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.9

class `postproc.postprocessing.PostProcessing` (*values, work_queue, result_queue, seed*)

Euclid Visible Instrument postprocessing class. This class allows to add radiation damage (as defined by the CDM03 model) and add readout noise to a simulated image.

applyLinearCorrection (*image*)

Applies a linear correction after one forward readout through the CDM03 model.

Bristow & Alexov (2003) algorithm further developed for HST data processing by Massey, Rhodes et al.

Parameters *image* (*ndarray*) – radiation damaged image

Returns corrected image after single forward readout

Return type *ndarray*

applyRadiationDamage (*data, iquadrant=0*)

Apply radian damage based on FORTRAN CDM03 model. The method assumes that input data covers only a single quadrant defined by the *iquadrant* integer.

Parameters

- **data** (*ndarray*) – imaging data to which the CDM03 model will be applied to.
- **iquadrant** (*int*) – number of the quadrant to process

cdm03 - Function signature: `sout = cdm03(sinp,iflip,jflip,dob,rdose,in_nt,in_sigma,in_tr,[xdim,y`

Required arguments: *sinp* : input rank-2 array('f') with bounds (*xdim,ydim*) *iflip* : input int *jflip* : input int *dob* : input float *rdose* : input float *in_nt* : input rank-1 array('d') with bounds (*zdim*) *in_sigma* : input rank-1 array('d') with bounds (*zdim*) *in_tr* : input rank-1 array('d') with bounds (*zdim*)

Optional arguments: *xdim* := `shape(sinp,0)` input int *ydim* := `shape(sinp,1)` input int *zdim* := `len(in_nt)` input int

Return objects: *sout* : rank-2 array('f') with bounds (*xdim,ydim*)

Note: Because Python/NumPy arrays are different row/column based, one needs to be extra careful here. `NumPy.asfortranarray` will be called to get an array laid out in Fortran order in memory. Before returning the array will be laid out in memory in C-style (row-major order).

Returns image that has been run through the CDM03 model

Return type ndarray

applyReadoutNoise (*data*)

Applies readout noise. The noise is drawn from a Normal (Gaussian) distribution. Mean = 0.0, and std = readout.

Parameters **data** (*ndarray*) – input data to which the readout noise will be added to

Returns updated data, noise image

Return type dict

compressAndRemoveFile (*filename*)

This method compresses the given file using gzip and removes the parent from the file system.

Parameters **filename** (*str*) – name of the file to be compressed

Returns None

cutoutRegion (*data*)

Cuts out a region from the imaging data. The cutout region is specified by xstart/stop and ystart/stop that are read out from the self.values dictionary. Also checks if there are values that are above the given cutoff value and sets those pixels to a max value (default=33e3).

Parameters

- **data** (*ndarray*) – image array
- **max** (*int or float*) – maximum allowed value [default = 33e3]

Returns cut out image from the original data

Return type ndarray

discretisetoADUs (*data*)

Convert floating point arrays to integer arrays and convert to ADUs. Adds bias level after converting to ADUs.

Parameters **data** (*ndarray*) – data to be discretised to.

Returns discretised array in ADUs

Return type ndarray

generateCTImap (*CTIed, originalData*)

Calculates a map showing the CTI effect. This map is being generated by dividing radiation damaged image with the original data.

Parameters

- **CTIed** (*ndarray*) – Radiation damaged image

- **originalData** (*ndarray*) – Original image before any radiation damage

Returns CTI map (ratio of radiation damaged image and original data)

Return type *ndarray*

loadFITS (*filename*, *ext=0*)

Loads data from a given FITS file and extension.

Parameters

- **filename** (*str*) – name of the FITS file
- **ext** (*int*) – FITS header extension [default=0]

Returns data, FITS header, xsize, ysize

Return type *dict*

radiateFullCCD (*fullCCD*, *quads=(0, 1, 2, 3)*, *xsize=2048*, *ysize=2066*)

This routine allows the whole CCD to be run through a radiation damage mode. The routine takes into account the fact that the amplifiers are in the corners of the CCD. The routine assumes that the CCD is using four amplifiers.

Parameters

- **fullCCD** (*ndarray*) – image of containing the whole CCD
- **quads** (*list*) – quadrants, numbered from lower left

Returns radiation damaged image

Return type *ndarray*

run ()

This is the method that will be called when multiprocessing.

writeFITSfile (*data*, *output*, *unsigned16bit=True*)

Write out FITS files using PyFITS.

Parameters

- **data** (*ndarray*) – data to write to a FITS file
- **output** (*string*) – name of the output file
- **unsigned16bit** (*bool*) – whether to scale the data using `bzero=32768`

Returns *None*

Generating a mosaic

This file contains a class to create a single VIS CCD image from separate files one for each quadrant.

requires NumPy

requires PyFITS

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

To execute:

```
python tileCCD.py -f 'Q*science.fits' -e 1
```

where -f argument defines the input files to be tiled and the -e argument marks the FITS extension from which the imaging data are being read.

version 0.4

Todo

1. Does not deal properly with multiple WCSs coming in the different quadrants (should recalculate the centre of the CCD and modify the WCS accordingly).
 2. Improve the history section.
-

class `postproc.tileCCD.tileCCD` (*inputs, log*)

Class to create a single VIS CCD image from separate quadrants files.

readData ()

Reads in data from all the input files and the header from the first file. Input files are taken from the input dictionary given when class was initiated.

Subtracts the pre- and overscan regions if these were simulated. Takes into account which quadrant is being processed so that the extra regions are subtracted correctly.

runAll ()

Wrapper to perform all class methods.

tileCCD (*xsize=2048, ysize=2066*)

Tiles quadrants to form a single CCD image.

Assume that the input file naming convention is Qx_CCDX_CCDY_name.fits.

Parameters

- **xsize** (*int*) – length of a quadrant in column direction
- **ysize** (*int*) – length of a quadrant in row direction

Returns image array of size (ysize*2, xsize*2)

Return type `ndarray`

writeFITSfile (*data=None, unsigned16bit=True*)

Write out FITS files using PyFITS.

Parameters

- **data** (*ndarray*) – data to write to a FITS file, if None use self.data

- **unsigned16bit** (*bool*) – whether to scale the data using
bzero=32768

Returns None

EXPOSURE TIMES

The package provides a simple exposure time calculator (ETC) that allows to estimate a signal-to-noise ratio of an average galaxy or star with a given number of VIS exposures. The ETC also allows to calculate limiting magnitude or an exposure time for a given magnitude.

For the Python documentation, please see:

3.1 Exposure Time Calculator

3.1.1 Calculating Exposure Times and Limiting Magnitude

This file provides a simple functions to calculate exposure times or limiting magnitudes.

requires NumPy

requires SciPy

requires matplotlib

version 0.3

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

`analysis.ETC.SNR(info, magnitude=24.5, exptime=565.0, exposures=3,
 galaxy=True, background=True, diginoise=True)`

Calculates the signal-to-noise ratio for an object of a given magnitude in a given exposure time and a number of exposures.

Parameters

- **info** (*dict*) – instrumental information such as zeropoint and background
- **magnitude** (*float or ndarray*) – input magnitude of an object(s)
- **exptime** (*float*) – exposure time [seconds]
- **exposures** (*int*) – number of exposures [default = 3]

- **galaxy** (*boolean*) – whether the exposure time should be calculated for an average galaxy or a star. If galaxy=True then the fraction of flux within an aperture is lower than in case of a point source.
- **background** (*boolean*) – whether to include background from sky, instrument, and dark current [default=True]
- **diginoise** (*boolean*) – if the readout noise is undersampled or poorly resolved then the effective readout noise should be used [default = True]

Returns signal-to-noise ratio

Return type float or ndarray

`analysis.ETC.SNRproptoPeak (info, exptime=565.0, exposures=1, diginoise=True)`

Calculates the relation between the signal-to-noise ratio and the electrons in the peak pixel.

Parameters

- **info** (*dict*) – instrumental information such as zeropoint and background
- **exptime** (*float*) – exposure time [seconds]
- **exposures** (*int*) – number of exposures [default = 1]
- **diginoise** (*boolean*) – if the readout noise is undersampled or poorly resolved then the effective readout noise should be used [default = True]

Returns signal-to-noise ratio

Return type float or ndarray

`analysis.ETC.exposureTime (info, magnitude, snr=10.0, exposures=3, fudge=0.7, galaxy=True, diginoise=True)`

Returns the exposure time for a given magnitude.

Parameters

- **info** (*dict*) – information describing the instrument
- **magnitude** (*float or ndarray*) – the magnitude of the object
- **snr** (*float*) – signal-to-noise ratio required [default = 10.0].
- **exposures** (*int*) – number of exposures that the object is present in [default = 3]
- **fudge** (*float*) – the fudge parameter to which to use to scale the snr to SExtractor required [default = 0.7]
- **galaxy** (*boolean*) – whether the exposure time should be calculated for an average galaxy or a star. If galaxy=True then the fraction of flux within an aperture is lower than in case of a point source.

- **diginoise** (*boolean*) – if the readout noise is undersampled or poorly resolved then the effective readout noise should be used [default = True]

Returns exposure time [seconds]

Return type float or ndarray

```
analysis.ETC.limitingMagnitude(info, exp=565, snr=10.0, expo-  
                               sures=3, fudge=0.7, galaxy=True,  
                               diginoise=True)
```

Calculates the limiting magnitude for a given exposure time, number of exposures and minimum signal-to-noise level to be reached.

Parameters

- **info** (*dict*) – instrumental information such as zeropoint and background
- **exp** (*float or ndarray*) – exposure time [seconds]
- **snr** (*float or ndarray*) – the minimum signal-to-noise ratio to be reached. .. Note:: This is couple to the fudge parameter: `snr_use = snr / fudge`
- **exposures** (*int*) – number of exposures [default = 3]
- **fudge** (*float*) – a fudge factor to divide the given signal-to-noise ratio with to reach to the required snr. This is mostly due to the fact that SExtractor may require a higher snr than what calculated otherwise.
- **galaxy** (*boolean*) – whether the exposure time should be calculated for an average galaxy or a star. If `galaxy=True` then the fraction of flux within an aperture is lower than in case of a point source.
- **diginoise** (*boolean*) – if the readout noise is undersampled or poorly resolved then the effective readout noise should be used [default = True]

Returns limiting magnitude given the input information

Return type float or ndarray

CREATING OBJECT CATALOGS

The *sources* subpackage contains a script to generate object catalogs with random x and y positions for stars and galaxies. The magnitudes of stars and galaxies are drawn from input distributions that are based on observations. As the number of stars depends on the galactic latitude, the script allows the user to use three different (30, 60, 90 degrees) angles when generating the magnitude distribution for stars (see the example plot below).

For the Python code documentation, please see:

4.1 Generating Object Catalogue

These simple functions can be used to generate different types of object catalogues that can then be used as an input for the VIS simulator.

Please note that the script requires files from the data folder. Thus, you should place the script to an empty directory and either copy or link to the data directory.

requires NumPy

requires SciPy

requires matplotlib

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

`sources.createObjectCatalogue.drawFromCumulativeDistributionFunction` (*cpdf*,
x,
num-
ber)

Draw a number of random x values from a cumulative distribution function.

Parameters

- **cpdf** (*numpy array*) – cumulative distribution function
- **x** (*numpy array*) – values of the abscissa
- **number** (*int*) – number of draws

Returns randomly drawn x value

Return type ndarray

`sources.createObjectCatalogue.generateCatalog(**kwargs)`

Generate a catalogue of stars and galaxies that follow realistic number density functions.

Parameters `deg` – galactic latitude, either 30, 60, 90

`sources.createObjectCatalogue.plotDistributionFunction(datax,
datay,
fitx,
fity,
out-
put)`

Generates a simple plot showing the observed data points and the fit that was generated based on these data.

`sources.createObjectCatalogue.starCatalog(stars=400, xmax=2048,
ymax=2066, mag-
min=23, magmax=26)`

Generate a catalog with stars at random positions.

`sources.createObjectCatalogue.starCatalogFixedMagnitude(stars=400,
xmax=2048,
ymax=2066,
mag=18,
ran-
dom=True,
per-
grid=51,
out='starsSameMag.dat')`

Generate a catalog with stars of a given magnitude either at random positions or in a rectangular grid.

Another way of creating a source catalog is to use *generateGalaxies* script in the *simulator* subpackage. This script depends on IRAF and uses the makeart IRAF package. There are many more options in this script, which basically just calls the makeart's gallist and starlist. For options, see IRAF's documentation.

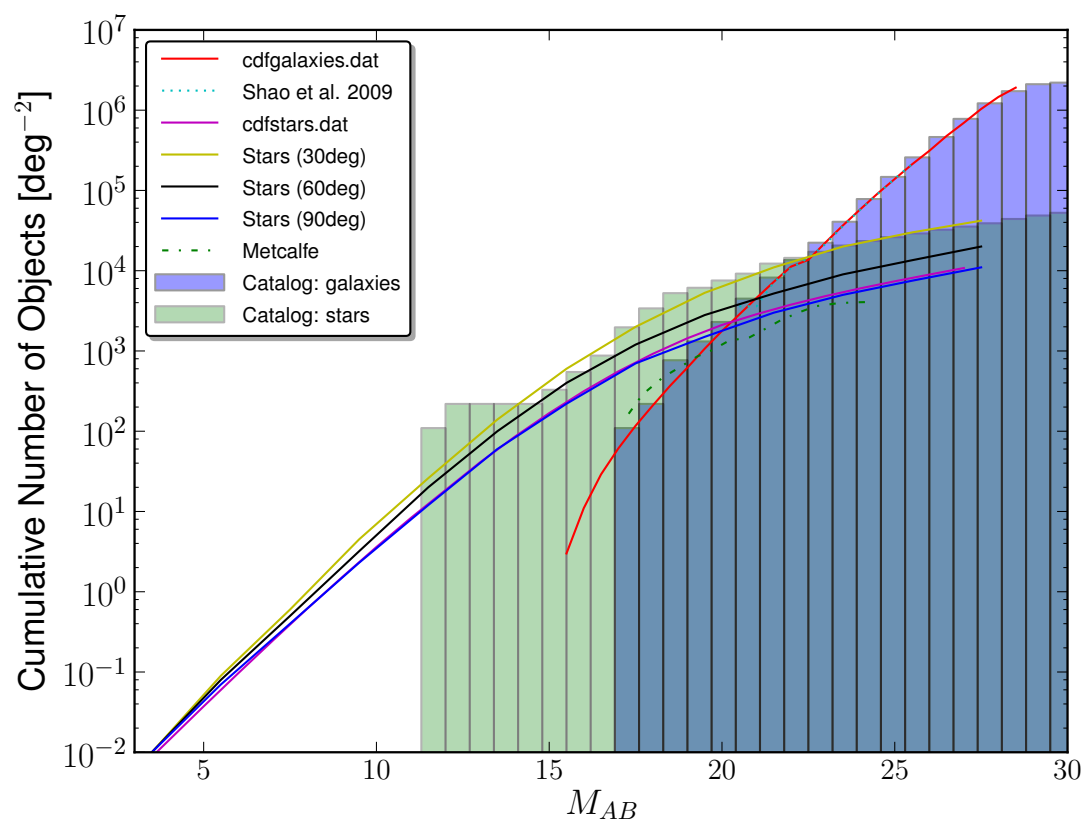


Figure 4.1: An example showing star and galaxy number counts in a source catalog suitable for VIS simulator. The solid lines show observations while the histograms show the distributions in the output catalogues.

CREATING SIMULATED MOCK IMAGES

The *simulator* subpackage contains scripts to generate simulated VIS images. Two different methods of generating mock images is provided. One which takes observed images (say from HST) as an input and another in which analytical profiles are used for galaxies. The former code is custom made while the latter relies heavily on IRAF's ardata package and mkobjects task.

The VIS reference simulator is the custom made with real observed galaxies as an input. The IRAF based simulator can be used, for example, to train algorithms to derive ellipticity of an object. For more detailed documentation, please see:

5.1 Simulation tools

5.1.1 The Euclid Visible Instrument Image Simulator

This file contains an image simulator for the Euclid VISible instrument.

The approximate sequence of events in the simulator is as follows:

1. Read in a configuration file, which defines for example, detector characteristics (bias, dark and readout noise, gain, plate scale and pixel scale, oversampling factor, exposure time etc.).
2. Read in another file containing charge trap definitions (for CTI modelling).
3. Read in a file defining the cosmic rays (trail lengths and cumulative distributions).
4. Read in CCD offset information, displace the image, and modify the output file name to contain the CCD and quadrant information (note that VIS has a focal plane of 6 x 6 detectors).
5. Read in a source list and determine the number of different object types.
6. Read in a file which assigns data to a given object index.
7. Load the PSF model (a 2D map with a given over sampling or field dependent maps).

8. Generate a finemap (oversampled image) for each object type. If an object is a 2D image then calculate the shape tensor to be used for size scaling. Each type of an object is then placed onto its own finely sampled finemap.
9. Loop over the number of exposures to co-add and for each object in the object catalog:
 - determine the number of electrons an object should have by scaling the object's magnitude with the given zeropoint and exposure time.
 - determine whether the object lands on to the detector or not and if it is a star or an extended source (i.e. a galaxy).
 - if object is extended determine the size (using a size-magnitude relation) and scale counts, convolve with the PSF, and finally overlay onto the detector according to its position.
 - if object is a star, scale counts according to the derived scaling (first step), and finally overlay onto the detector according to its position.
10. Apply calibration unit flux to mimic flat field exposures [optional].
11. Apply a multiplicative flat-field map to emulate pixel-to-pixel non-uniformity [optional].
12. Add a charge injection line (horizontal and/or vertical) [optional].
13. Add cosmic ray tracks onto the CCD with random positions but known distribution [optional].
14. Apply detector charge bleeding in column direction [optional].
15. Add photon (Poisson) noise and constant dark current to the pixel grid [optional].
16. Add cosmetic defects from an input file [optional].
17. Add pre- and overscan regions in the serial direction [optional].
18. Apply the CDM03 radiation damage model [optional].
19. Apply CCD273 non-linearity model to the pixel data [optional].
20. Add readout noise selected from a Gaussian distribution [optional].
21. Convert from electrons to ADUs using a given gain factor.
22. Add a given bias level and discretise the counts (the output is going to be in 16bit unsigned integers).
23. Finally the simulated image is converted to a FITS file, a WCS is assigned and the output is saved to the current working directory.

Warning: The code is still work in progress and new features are being added. The code has been tested, but nevertheless bugs may be lurking in corners, so please report any weird or inconsistent simulations to the author.

Dependencies

This script depends on the following packages:

requires PyFITS (tested with 3.0.6)
requires NumPy (tested with 1.6.1)
requires numexpr (tested with 2.0.1)
requires SciPy (tested with 0.10.1)
requires vissim-python package

Note: This class is not Python 3 compatible. For example, xrange does not exist in Python 3 (but is used here for speed and memory consumption improvements). In addition, at least the string formatting should be changed if moved to Python 3.x.

Testing

Before trying to run the code, please make sure that you have compiled the cdm03.f90 Fortran code using f2py (f2py -c -m cdm03 cdm03.f90). For testing, please run the SCIENCE section from the test.config as follows:

```
python simulator.py -c data/test.config -s TESTSCIENCE1X
```

This will produce an image representing VIS lower left (0th) quadrant. Because noise and cosmic rays are randomised one cannot directly compare the science outputs but we must rely on the outputs that are free from random effects.

In the data subdirectory there is a file called “nonoisencrQ0_00_00testscience.fits”, which is the comparison image without any noise or cosmic rays. To test the functionality, please divide your nonoise and no cosmic ray track output image with the on in the data folder. This should lead to a uniformly unity image or at least very close given some numerical rounding uncertainties, especially in the FFT convolution (which is float32 not float64).

Benchmarking

A minimal benchmarking has been performed using the TESTSCIENCE1X section of the test.config input file:

```
Galaxy: 26753/26753 intscale=199.421150298 size=0.0353116000387  
6798 objects were place on the detector
```

```
real          4m14.008s  
user          3m59.609s  
sys           0m4.728s
```

These numbers have been obtained with my laptop (2.2 GHz Intel Core i7) with 64-bit Python 2.7.2 installation. Further speed testing can be performed using the cProfile module as follows:

```
python -m cProfile -o vissim.profile simulator.py -c data/test.config -s TESTSCI
```

and then analysing the results with e.g. RunSnakeRun.

Change Log

version 1.1

Version and change logs:

- 0.1: pre-development backbone.
- 0.4: first version with most pieces together.
- 0.5: this version has all the basic features present, but not fully tested.
- 0.6: implemented pre/overscan, fixed a bug when an object was getting close to the image it was not overlaid correctly. Included multiplicative flat fielding
- 0.7: implemented bleeding.
- 0.8: cleaned up the code and improved documentation. Fixed a bug related to checking. Improved the information that is being written to the FITS header.
- 0.9: fixed a problem with the CTI model swapping Q1 with Q2. Fixed a bug that could be identical for each quadrant even though Q1 and 3 needs the regions to be different.
- 1.0: First release. The code can now take an over sampled PSF and use that for convolution to the header.
- 1.05: included an option to add flux from the calibration unit to allow flat fielding. Now scaled the number of cosmic rays with the exposure time so that 10s flat fielding of cosmic ray tracks.
- 1.06: changed how stars are laid down on the CCD. Now the PSF is interpolated to the oversampled frame after which it is downsampled to the CCD grid. This should improve accuracy.
- 1.07: included an option to apply non-linearity model. Cleaned the documentation.
- 1.08: optimised some of the operations with numexpr (only a minor improvement).
- 1.1: Fixed a bug related to adding the system readout noise. In previous version the noise was being underestimated due to the fact that it was included as a variance not as a mean.

Future Work

Todo

1. test that the cosmic rays are correctly implemented (looks like there are too many long trails and too few short)
2. check that the size distribution of galaxies is suitable (now the scaling is before convolution!)
3. objects.dat is now hard coded into the code, this should be read from the config file
4. implement spatially variable PSF
5. implement CCD offsets (for focal plane simulations)
6. test that the WCS is correctly implemented and allows CCD offsets
7. implement a Gaussian random draw for the size-magnitude distribution rather than a straight fit
8. centering of an object depends on the centering of the postage stamp (should recalculate the centroid)

9. charge injection line positions are now hardcoded to the code, read from the config file
 10. include rotation in metrology
 11. implement optional dithered offsets
 12. try to further improve the convolution speed (look into fftw package)
-

Contact Information

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

```
class simulator.simulator.VISSimulator (configfile, debug, section='SCIENCE')
```

Euclid Visible Instrument Image Simulator

The image that is being build is in:

```
self.image
```

Parameters

- **configfile** (*string*) – name of the configuration file
- **debug** (*boolean*) – debugging mode on/off
- **section** (*string*) – name of the section of the configuration file to process

addChargeInjection ()

Add either horizontal or vertical charge injection line to the image.

addCosmicRays ()

Add cosmic rays to the arrays based on a power-law intensity distribution for tracks.

Cosmic ray properties (such as location and angle) are chosen from random Uniform distribution.

addLampFlux ()

Include flux from the calibration source.

addObjects ()

Add objects from the object list to the CCD image (self.image).

Scale the object's brightness in electrons and size using the input catalog magnitude. The size scaling is a crude fit to Massey et al. plot.

addPreOverScans ()

Add pre- and overscan regions to the self.image. These areas are added only in the serial direction. Because the 1st and 3rd quadrant are read out in to a different serial direction than the nominal orientation, in these images the regions are mirrored.

The size of prescan and overscan regions are defined by the `prescanx` and `overscanx` keywords, respectively.

applyBias()

Adds a bias level to the image being constructed.

The value of bias is read from the configure file and stored in the information dictionary (key `bias`).

applyBleeding()

Apply bleeding along the CCD columns if the number of electrons in a pixel exceeds the full-well capacity.

Bleeding is modelled in the parallel direction only, because the CCD273s are assumed not to bleed in serial direction.

Returns None

applyCosmetics()

Apply cosmetic defects described in the input file.

Warning: This method does not work if the input file has exactly one line.

applyFlatfield()

Applies multiplicative flat field to emulate pixel-to-pixel non-uniformity.

Because the pixel-to-pixel non-uniformity effect (i.e. multiplicative) flat fielding takes place before CTI and other effects, the flat field file must be the same size as the pixels that see the sky. Thus, in case of a single quadrant $(x, y) = (2048, 2066)$.

applyNoise()

Apply dark current, the cosmic background, and Poisson noise. Scales dark and background with the exposure time.

Additionally saves the image without noise to a FITS file.

applyNonlinearity()

Applies a CCD273 non-linearity model to the image being constructed.

applyRadiationDamage()

Applies CDM03 radiation model to the image being constructed.

See Also:

Class :*CDM03*

applyReadoutNoise()

Applies readout noise to the image being constructed.

The noise is drawn from a Normal (Gaussian) distribution with `average=0.0` and `std=readout noise`.

configure()

Configures the simulator with input information and creates an empty array to which the final image will be built on.

cosmicRayIntercepts (*lum, x0, y0, l, phi*)

Derive cosmic ray streak intercept points.

Parameters

- **lum** – luminosities of the cosmic ray tracks
- **x0** – central positions of the cosmic ray tracks in x-direction
- **y0** – central positions of the cosmic ray tracks in y-direction
- **l** – lengths of the cosmic ray tracks
- **phi** – orientation angles of the cosmic ray tracks

Returns map

Return type nd-array

discretise (*max=65535*)

Converts a floating point image array (self.image) to an integer array with max values defined by the argument max.

Parameters **max** (*float*) – maximum value the the integer array may contain [default 65k]

Returns None

electrons2ADU ()

Convert from electrons to ADUs using the value read from the configuration file.

generateFinemaps ()

Generates finely sampled images of the input data.

Warning: This should be rewritten. Now a direct conversion from FORTRAN, and thus not probably very effective. Assumes the PSF sampling for other finemaps.

objectOnDetector (*object*)

Tests if the object falls on the detector.

Parameters **object** – object to be placed to the self.image.

Returns whether the object falls on the detector or not

Return type boolean

overlayToCCD (*data, obj*)

Overlay data from a source object onto the self.image.

Parameters

- **data** (*ndarray*) – ndarray of data to be overlaid on to self.image
- **obj** (*list*) – object information such as x,y position

processConfigs()

Processes configuration information and save the information to a dictionary `self.information`.

The configuration file may look as follows:

```
[TEST]
quadrant = 0
CCDx = 0
CCDy = 0
xsize = 2048
ysize = 2066
prescanx = 50
ovrscanx = 20
fullwellcapacity = 200000
dark = 0.001
readout = 4.5
bias = 1000.0
cosmic_bkgd = 0.172
e_ADU = 3.5
injection = 150000.0
magzero = 1.7059e10
exposures = 1
exptime = 565.0
RA = 145.95
DEC = -38.16
sourcelist = data/source_test.dat
PSFfile = data/interpolated_psf.fits
trapfile = data/cdm_euclid.dat
cosmeticsFile = data/cosmetics.dat
flatfieldfile = data/VISFlatField2percent.fits
output = test.fits
addSources = yes
noise = yes
cosmetics = no
chargeInjectionx = no
chargeInjectiony = no
radiationDamage = yes
cosmicRays = yes
overscans = yes
bleeding = yes
flatfieldM = yes
```

For explanation of each field, see `/data/test.config`.

readConfigs()

Reads the config file information using `configParser`.

readCosmicRayInformation()

Reads in the cosmic ray track information from two input files.

Stores the information to a dictionary called `cr`.

readObjectlist ()

Reads object list using `numpy.loadtxt`, determines the number of object types, and finds the file that corresponds to a given object type.

The input catalog is assumed to contain the following columns:

- 1.x coordinate
- 2.y coordinate
- 3.apparent magnitude of the object
- 4.type of the object [0=star, number=type defined in the objects.dat]
- 5.rotation [0 for stars, [0, 360] for galaxies]

This method also displaces the object coordinates based on the quadrant and the CCD to be simulated.

Note: If even a single object type does not have a corresponding input then this method forces the program to exit.

readPSFs ()

Reads in a PSF from a FITS file.

Note: at the moment this method supports only a single PSF file.

simulate ()

Create a single simulated image of a quadrant defined by the configuration file. Will do all steps defined in the config file sequentially.

Returns None

writeFITSfile (data, filename, unsigned16bit=False)

Writes out a simple FITS file.

Parameters

- **data** (*ndarray*) – data to be written
- **filename** (*str*) – name of the output file
- **unsigned16bit** (*bool*) – whether to scale the data using `bzero=32768`

Returns None

writeOutputs ()

Writes out a FITS file using PyFITS and converts the image array to 16bit unsigned integer as appropriate for VIS.

Updates header with the input values and flags used during simulation.

5.1.2 Generating Mock Objects with IRAF

This script provides a class that can be used to generate objects such as galaxies using IRAF.

requires PyRAF

requires PyFITS

requires NumPy

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.1

class `simulator.generateGalaxies.generateFakeData` (*log*, ***kwargs*)

Generates an image frame with stars and galaxies using IRAF's artdata.

addObjects (*inputlist*=*'galaxies.dat'*)

Add object(s) from inputlist to the output image.

Parameters *inputlist* (*str*) – name of the input list

createGalaxylist (*ngalaxies*=*150*, *output*=*'galaxies.dat'*)

Generates an ascii file with uniform random x and y positions. The magnitudes of galaxies are taken from an isotropic and homogeneous power-law distribution.

The output ascii file contains the following columns: xc yc magnitude model radius ar pa <save>

Parameters

- **ngalaxies** (*int*) – number of galaxies to include
- **output** (*str*) – name of the output ascii file

createStarlist (*nstars*=*20*, *output*=*'stars.dat'*)

Generates an ascii file with uniform random x and y positions. The magnitudes of stars are taken from an isotropic and homogeneous power-law distribution.

The output ascii file contains the following columns: xc yc magnitude

Parameters

- **nstars** (*int*) – number of stars to include
- **output** (*str*) – name of the output ascii file

maskCrazyValues (*filename*=*None*)

For some reason mkobjects sometimes adds crazy values to an image. This method tries to remove those values and set them to more reasonable ones. The values > 65k are set to the median of the image.

Parameters *filename* (*str*) – name of the input file to modify [default = `self.settings['output']`]

Returns None

runAll (*nostars=True*)
Run all methods sequentially.



Figure 5.1: An example image generated with the reference simulator. The image shows a part of a single CCD.

DATA REDUCTION

The *reduction* subpackage contains a simple script to reduce VIS data. For more detailed documentation of the classes, please see:

6.1 Data reduction tools

6.1.1 VIS Data Reduction and Processing

This simple script can be used to reduce (simulated) VIS data.

The script was initially written for reducing a single CCD data. However, since the version 0.5 the script tries to guess if the input is a single quadrant then reduce correctly.

The script performs the following data reduction steps:

- 1 Bias correction
- 2 Flat fielding (only if an input file is provided)
- 3 CTI correction

To Run:

```
python reduceVISdata.py -i VISCCD.fits -b superBiasVIS.fits -f SuperFlatField.fi
```

requires PyFITS

requires NumPy

requires CDM03 (FORTRAN code, `f2py -c -m cdm03 cdm03.f90`)

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.5

Todo

1. implement background/sky subtraction
-

class `reduction.reduceVISdata.reduceVISdata` (*values, log*)

Simple class to reduce VIS data.

applyCTICorrection()

Applies a CTI correction in electrons using CDM03 CTI model. Converts the data to electrons using the gain value given in `self.values`. The number of forward reads is defined by `self.values['order']` parameter.

Bristow & Alexov (2003) algorithm further developed for HST data processing by Massey, Rhodes et al.

There is probably an excess of `.copy()` calls here, but I had some problems when calling the Fortran code so I added them for now.

flatfield()

Take into account pixel-to-pixel non-uniformity through multiplicative flat fielding.

subtractBias()

Simply subtracts `self.bias` from the input data.

writeFITSfile()

Write out FITS files using PyFITS.

6.2 VIS data reduction studies

6.2.1 Bias Calibration

This simple script can be used to study the number of bias frames required to meet the VIS calibration requirements.

The following requirements related to the bias calibration has been taken from GDPRD.

R-GDP-CAL-052: The contribution of the residuals of VIS bias subtraction to the *error on the determination of each ellipticity component* of the local PSF shall not exceed 3×10^{-5} (one sigma).

R-GDP-CAL-062: The contribution of the residuals of VIS bias subtraction to the *relative error* $\sigma(R2)/R2$ on the determination of the local PSF $R2$ shall not exceed 1×10^{-4} (one sigma).

requires PyFITS

requires NumPy

requires matplotlib

requires VISsim-Python

version 0.95

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

```
analysis.biasCalibration.addReadoutNoise (data, readnoise=4.5,  
                                           gain=3.5, number=1)
```

Add readout noise to the input data. The readout noise is the median of the number of frames.

Parameters

- **data** (*ndarray*) – input data to which the readout noise will be added to [ADUs]
- **readnoise** (*float*) – standard deviation of the read out noise [electrons]
- **gain** (*float*) – the gain factor that is used to convert electrons to ADUs
- **number** (*int*) – number of read outs to median combine before adding to the data [default=1]

Returns data + read out noise

Return type ndarray [same as input data]

```
analysis.biasCalibration.findTolerableErrorPiston (log,  
                                                    file='data/psf12x.fits',  
                                                    oversam-  
                                                    ple=12.0,  
                                                    psfs=500,  
                                                    sigma=0.36,  
                                                    itera-  
                                                    tions=6, de-  
                                                    bug=False)
```

Calculate ellipticity and size for PSFs of different scaling when there is a residual bias offset.

Parameters **sigma** (*float*) – 1sigma radius of the Gaussian weighting function for shape measurements

```
analysis.biasCalibration.findTolerableErrorSlope (log,  
                                                    file='data/psf12x.fits',  
                                                    oversam-  
                                                    ple=12.0,  
                                                    psfs=500,  
                                                    sigma=0.36,  
                                                    iterations=6,  
                                                    pixels=60)
```

Calculate ellipticity and size for PSFs of different scaling when there is a residual bias slope.

Parameters **sigma** (*float*) – 1sigma radius of the Gaussian weighting function for shape measurements

```
analysis.biasCalibration.plotDeltaEs (deltae1, deltae2, deltae, output,  
                                       title='', ymax=8, req=3)
```

Generates a simple plot showing the errors in the ellipticity components.

`analysis.biasCalibration.plotEs(deltae1, deltae2, deltae, output, title='')`

Generates a simple plot showing the ellipticity components.

`analysis.biasCalibration.plotNumberOfFramesDelta(results, timeStamp=False)`

Creates a simple plot to combine and show the results for errors (delta).

Parameters

- **results** (*dict*) – results to be plotted
- **timeStamp** (*bool*) – whether to include a time stamp in the output image

`analysis.biasCalibration.plotNumberOfFramesSigma(results, reqe=3e-05, reqr2=0.0001, shift=0.1, timeStamp=False)`

Creates a simple plot to combine and show the results.

Parameters

- **results** (*dict*) – results to be plotted
- **req** (*float*) – the requirement
- **ymax** (*int or float*) – maximum value to show on the y-axis
- **shift** (*float*) – the amount to shift the e2 results on the abscissa (for clarity)
- **timeStamp** (*bool*) – whether to include a time stamp in the output image

`analysis.biasCalibration.testBiasCalibrationDelta(log, numdata=2066, floor=995, xsize=2048, ysize=2066, order=3, biases=15, surfaces=100, file='psf1x.fits', psfs=500, psfscale=1000.0, debug=False, plots=False)`

Derive the PSF ellipticities for a given number of random surfaces with random PSF

positions and a given number of biases median combined and compare to the nominal PSF ellipticity.

This function can be used to derive the error (delta) in determining ellipticity and size given a reference PSF.

Choices that need to be made and effect the results:

- 1.bias surface that is assumed (amplitude, complexity, etc.)
- 2.whether the order of the polynomial surface to be fitted is known or not
- 3.size of the Gaussian weighting function when calculating the ellipticity components

There are also other choices such as the number of PSFs and scaling and the random numbers generated for the surface that also affect the results, however, to a lesser degree.

Generates a set of plots that can be used to inspect the simulation.

```
analysis.biasCalibration.testBiasCalibrationSigma(log, num-  
data=2066,  
floor=3500,  
xsize=2048,  
ysize=2066,  
order=3, bi-  
ases=15,  
sur-  
faces=100,  
file='psf1x.fits',  
psfs=500,  
psfs-  
cale=100000.0,  
gain=3.5,  
de-  
bug=False,  
plots=True)
```

Derive the PSF ellipticities for a given number of random surfaces with random PSF positions and a given number of biases median combined.

This function is to derive the the actual values so that the knowledge (variance) can be studied.

Choices that need to be made and effect the results:

- 1.bias surface that is assumed (amplitude, complexity, etc.)
- 2.whether the order of the polynomial surface to be fitted is known or not
- 3.size of the Gaussian weighting function when calculating the ellipticity components

There are also other choices such as the number of PSFs and scaling and the random numbers generated for the surface that also affect the results, however, to a lesser degree.

Generates a set of plots that can be used to inspect the simulation.

6.2.2 Flat Field Calibration

This simple script can be used to study the number of flat fields required to meet the VIS calibration requirements.

The following requirements related to the flat field calibration has been taken from GDPRD.

R-GDP-CAL-054: The contribution of the residuals of VIS flat-field correction to the error on the determination of each ellipticity component of the local PSF shall not exceed 3×10^{-5} (one sigma).

R-GDP-CAL-064: The contribution of the residuals of VIS flat-field correction to the relative error on the determination of the local PSF R2 shall not exceed 1×10^{-4} (one sigma).

Note: The amount of cosmic rays in the simulated input images might be too low, because the exposure was set to 10 seconds and cosmic rays were calculated based on this. However, in reality the readout takes about 80 seconds. Thus, the last row is effected by cosmic a lot more than by assuming a single 10 second exposure.

requires PyFITS

requires NumPy

requires SciPy

requires matplotlib

requires VISsim-Python

version 0.95

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

```
analysis.FlatfieldCalibration.findTolerableError(log,  
                                                    file='data/psf4x.fits',  
                                                    oversam-  
                                                    ple=4.0,  
                                                    psfs=1000,  
                                                    iterations=7,  
                                                    sigma=0.75)
```

Calculate ellipticity and size for PSFs of different scaling when there is a residual pixel-to-pixel variations.

```
analysis.FlatfieldCalibration.generateResidualFlatField(files='Q0*flatfield*.fits',
                                                         combine=77,
                                                         lampfile='data/VIScalibration
                                                         reference='data/VISFlatField
                                                         plots=False,
                                                         debug=False)
```

Generate a median combined flat field residual from given input files.

Randomly draws a given number (kw combine) of files from the file list identified using the files kw. Median combine all files before the lamp profile given by lampfile kw is being divided out. This will produce a derived flat field. This flat can be compared against the reference that was used to produce the initial data to derive a residual flat that describes the error in the flat field that was derived.

Parameters

- **files** (*str*) – wildcard flagged name identifier for the FITS files to be used for generating a flat
- **combine** (*int*) – number of files to median combine
- **lampfile** (*str*) – name of the calibration unit flux profile FITS file
- **reference** (*str*) – name of the reference pixel-to-pixel flat field FITS file
- **plots** (*boolean*) – whether or not to generate plots
- **debug** (*boolean*) – whether or not to produce output FITS files

Warning: Remember to use an appropriate lamp and reference files so that the error in the derived flat field can be correctly calculated.

Returns residual flat field (difference between the generated flat and the reference)

Return type ndarray

```
analysis.FlatfieldCalibration.plotNumberOfFrames(results,
                                                  rege=3e-05,
                                                  reqr2=0.0001,
                                                  shift=0.1, out-
                                                  dir='results',
                                                  timeS-
                                                  tamp=False)
```

Creates a simple plot to combine and show the results.

Parameters

- **res** (*list*) – results to be plotted [results dictionary, reference values]

- **reqe** (*float*) – the requirement for ellipticity [default=3e-5]
- **reqr2** (*float*) – the requirement for size R2 [default=1e-4]
- **shift** (*float*) – the amount to shift the e2 results on the abscissa (for clarity)
- **outdir** (*str*) – output directory to which the plots will be saved to
- **timeStamp** (*bool*) – whether or not to include a time stamp to the output image

Returns None

```
analysis.FlatfieldCalibration.testFlatCalibration (log,      flats,  
                                                    sur-  
                                                    faces=100,  
                                                    file='data/psf1x.fits',  
                                                    psfs=500,  
                                                    sigma=0.75,  
                                                    itera-  
                                                    tions=10,  
                                                    plot=False,  
                                                    de-  
                                                    bug=False)
```

Derive the PSF ellipticities for a given number of random surfaces with random PSF positions and a given number of flat fields median combined.

This function is to derive the the actual values so that the knowledge (variance) can be studied.

```
analysis.FlatfieldCalibration.testNoFlatfieldingEffects (log,  
                                                         file='data/psf1x.fits',  
                                                         over-  
                                                         sam-  
                                                         ple=1.0,  
                                                         psfs=500)
```

Calculate ellipticity and size variance and error in case of no pixel-to-pixel flat field correction.

DATA ANALYSIS

The *analysis* subpackage contains classes and scripts related to data analysis. A simple source finder and shape measuring classes are provided together with a wrapper to analyse reduced VIS data. For more detailed documentation of the classes, please see:

7.1 VIS data analysis tools

7.1.1 Object finding and measuring ellipticity

This script provides a class that can be used to analyse VIS data. One can either choose to use a Python based source finding algorithm or give a SExtractor catalog as an input. If an input catalog is provided then the program assumes that X_IMAGE and Y_IMAGE columns are present in the input file.

requires PyFITS

requires NumPy

requires matplotlib

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.2

class `analysis.analysis.analyseVISdata` (*filename*, *log*, ***kwargs*)
Simple class that can be used to find objects and measure their ellipticities.

One can either choose to use a Python based source finding algorithm or give a SExtractor catalog as an input. If an input catalog is provided then the program assumes that X_IMAGE and Y_IMAGE columns are present in the input file.

Parameters

- **filename** (*string*) – name of the FITS file to be analysed.
- **log** (*instance*) – logger
- **kwargs** (*dict*) – additional keyword arguments

Settings dictionary contains all parameter values needed for source finding and analysis.

doAll ()

Run all class methods sequentially.

findSources ()

Finds sources from data that has been read in when the class was initiated. Saves results such as x and y coordinates of the objects to self.sources. x and y coordinates are also available directly in self.x and self.y.

measureEllipticity ()

Measures ellipticity for all objects with coordinates (self.x, self.y).

Ellipticity is measured using Gaussian weighted quadrupole moments. See shape.py and especially the ShapeMeasurement class for more details.

plotEllipticityDistribution ()

Creates a simple plot showing the derived ellipticity distribution.

readSources ()

Reads in a list of sources from an external file. This method assumes that the input source file is in SExtractor format. Input catalog is saved to self.sources. x and y coordinates are also available directly in self.x and self.y.

writeResults ()

Outputs results to an ascii file defined in self.settings. This ascii file is in SExtractor format and contains the following columns:

1. X coordinate
2. Y coordinate
3. ellipticity
4. R_{2}

7.1.2 Measuring a shape of an object

Simple class to measure quadrupole moments and ellipticity of an object.

Note: Double check that the e1 component is not flipped in sense that Qxx and Qyy would be reversed because NumPy arrays are column major.

requires NumPy

requires PyFITS

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.3

class `analysis.shape.shapeMeasurement (data, log, **kwargs)`

Provides methods to measure the shape of an object.

Parameters

- **data** (*ndarray*) – name of the FITS file to be analysed.
- **log** (*instance*) – logger
- **kwargs** (*dict*) – additional keyword arguments

Settings dictionary contains all parameter values needed.

Gaussian2D (*x, y, sigmax, sigmay*)

Create a two-dimensional Gaussian centered on *x, y*.

Parameters

- **x** (*float*) – x coordinate of the centre
- **y** (*float*) – y coordinate of the centre
- **sigmax** (*float*) – standard deviation of the Gaussian in x-direction
- **sigmay** (*float*) – standard deviation of the Gaussian in y-direction

Returns circular Gaussian 2D profile and x and y mesh grid

Return type dict

circular2DGaussian (*x, y, sigma*)

Create a circular symmetric Gaussian centered on *x, y*.

Parameters

- **x** (*float*) – x coordinate of the centre
- **y** (*float*) – y coordinate of the centre
- **sigma** (*float*) – standard deviation of the Gaussian, note that `sigma_x = sigma_y = sigma`

Returns circular Gaussian 2D profile and x and y mesh grid

Return type dict

measureRefinedEllipticity ()

Derive a refined iterated ellipticity measurement for a given object.

By default ellipticity is defined in terms of the Gaussian weighted quadrupole moments. If `self.settings['weighted']` is False then no weighting scheme is used. The number of iterations is defined in `self.settings['iterations']`.

:return centroids [indexing stars from 1], ellipticity (including projected e1 and e2), and R2 :rtype: dict

quadrupoles (*img*)

Derive quadrupole moments and ellipticity from the input image.

Parameters **img** – input image data

Returns quadrupoles, centroid, and ellipticity (also the projected components e1, e2)

Return type dict

writeFITS (*data*, *output*)

Write out a FITS file using PyFITS.

Parameters

- **data** (*ndarray*) – data to write to a FITS file
- **output** (*string*) – name of the output file

Returns None

7.1.3 Source finding

Simple source finder that can be used to find objects from astronomical images.

requires NumPy

requires SciPy

requires matplotlib

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

version 0.5

class `analysis.sourceFinder.sourceFinder` (*image*, *log*, ***kwargs*)

This class provides methods for source finding.

Parameters

- **image** (*numpy.ndarray*) – 2D image array
- **log** (*instance*) – logger
- **kwargs** (*dictionary*) – additional keyword arguments

cleanSample ()

Cleans up small connected components and large structures.

doAperturePhotometry (*pixel_based=True*)

Perform aperture photometry and calculate the shape of the object based on quadrupole moments. This method also calculates refined centroid for each object.

Warning: Results are rather sensitive to the background subtraction, while the errors depend strongly on the noise estimate from the background. Thus, great care should be exercised when applying this method.

Parameters **pixel_based** (*boolean*) – whether to do a global or pixel based background subtraction

Returns photometry, error_in_photometry, ellipticity, refined_x_pos, refined_y_pos

Returns ndarray, ndarray, ndarray, ndarray, ndarray

find()

Find all pixels above the median pixel after smoothing with a Gaussian filter.

Note: maybe one should use mode instead of median?

generateOutput()

Outputs the found positions to an ascii and a DS9 reg file.

Returns None

getCenterOfMass()

Finds the center-of-mass for all objects using `numpy.ndimage.center_of_mass` method.

Note: these positions are zero indexed!

Returns xposition, yposition, center-of-masses

Return type list

getContours()

Derive contours using the `diskStructure` function.

getFluxes()

Derive fluxes or counts.

getSizes()

Derives sizes for each object.

plot()

Generates a diagnostic plot.

Returns None

runAll()

Performs all steps of source finding at one go.

Returns source finding results such as positions, sizes, fluxes, etc.

Return type dictionary

writePhotometry()

Outputs the photometric results to an ascii file.

Returns None

class `analysis.sourceFinder.sourceFinder` (*image*, *log*, ***kwargs*)

This class provides methods for source finding.

Parameters

- **image** (*numpy.ndarray*) – 2D image array

- **log** (*instance*) – logger
- **kwargs** (*dictionary*) – additional keyword arguments

cleanSample ()

Cleans up small connected components and large structures.

doAperturePhotometry (*pixel_based=True*)

Perform aperture photometry and calculate the shape of the object based on quadrupole moments. This method also calculates refined centroid for each object.

Warning: Results are rather sensitive to the background subtraction, while the errors depend strongly on the noise estimate from the background. Thus, great care should be exercised when applying this method.

Parameters **pixel_based** (*boolean*) – whether to do a global or pixel based background subtraction

Returns photometry, error_in_photometry, ellipticity, refined_x_pos, refined_y_pos

Returns ndarray, ndarray, ndarray, ndarray, ndarray

find ()

Find all pixels above the median pixel after smoothing with a Gaussian filter.

Note: maybe one should use mode instead of median?

generateOutput ()

Outputs the found positions to an ascii and a DS9 reg file.

Returns None

getCenterOfMass ()

Finds the center-of-mass for all objects using `numpy.ndimage.center_of_mass` method.

Note: these positions are zero indexed!

Returns xposition, yposition, center-of-masses

Return type list

getContours ()

Derive contours using the `diskStructure` function.

getFluxes ()

Derive fluxes or counts.

getSizes ()

Derives sizes for each object.

plot()

Generates a diagnostic plot.

Returns None

runAll()

Performs all steps of source finding at one go.

Returns source finding results such as positions, sizes, fluxes, etc.

Return type dictionary

writePhotometry()

Outputs the photometric results to an ascii file.

Returns None

7.1.4 Properties of the Point Spread Function

This script can be used to plot some PSF properties such as ellipticity and size as a function of the focal plane position.

requires PyFITS

requires NumPy

requires SciPy

requires matplotlib

requires VISsim-Python

author Sami-Matias Niemi

contact smn2@mssl.ucl.ac.uk

`analysis.PSFproperties.encircledEnergy (file='data/psf12x.fits')`

Calculates the encircled energy from a PSF. The default input PSF is 12 times over-sampled with 1 micron pixel.

`analysis.PSFproperties.generatePlots (filedata, interactive=False)`

Generate a simple plot showing some results.

`analysis.PSFproperties.measureChars (data, info, log)`

Measure ellipticity, R2, FWHM etc.

`analysis.PSFproperties.parseName (file)`

Parse information from the input file name.

Example name:

`detector_jitter-1_TOL05_MC_T0074_50arcmin2_grid_Nim=16384x16384_pixsize=1.00`

`analysis.PSFproperties.peakFraction (file='data/psf12x.fits', ra-
dius=0.65, oversample=12)`

Calculates the fraction of energy in the peak pixel for a given PSF compared to an aperture of a given radius.

`analysis.PSFproperties.plotEncircledEnergy` (*radius*, *energy*,
scale=12)

`analysis.PSFproperties.readData` (*file*)

Reads in the data from a given FITS file.

The *data* subfolder contains the supporting data, such as cosmic ray distributions, cosmetics maps, flat fielding files, PSFs, and an example configuration file.

CHARGE TRANSFER INEFFICIENCY

The *fitting* subpackage contains a simple script that can be used to fit trap species so that the Charge Transfer Inefficiency (CTI) trails forming behind charge injection lines agree with measured data.

8.1 Fortran code for CTI

The *fortran* folder contains a CDM03 CTI model Fortran code. For speed the CDM03 model has been written in Fortran because it contains several nested loops. One can use *f2py* to compile the code to a format that can be imported directly to Python.

SUPPORTING METHODS AND FILES

9.1 Objects

A few postage stamps showing observed galaxies have been placed to the *objects* directory. These FITS files can be used for, e.g., testing the shape measurement code.

9.2 Code

The *support* subpackage contains some support classes and methods related to generating log files and read in data.

PHOTOMETRIC ACCURACY

The reference image simulator has been tested against photometric accuracy (without aperture correction). A simulated image was generated with the reference simulator (using three times over sampled PSF) after which the different quadrants were combined to form a single CCD. These data were then reduced using the reduction script provided in the package. Finally, sources were identified from the reduced data and photometry performed using SExtractor, after which the extracted magnitudes were compared against the input catalog.

The following figures show that the photometric accuracy with realistic noise and the end-of-life radiation damage is about 0.08 mag. Please note, however, that the derived magnitudes are based on a single 565 second exposure, and therefore the scatter is large in case of fainter objects.

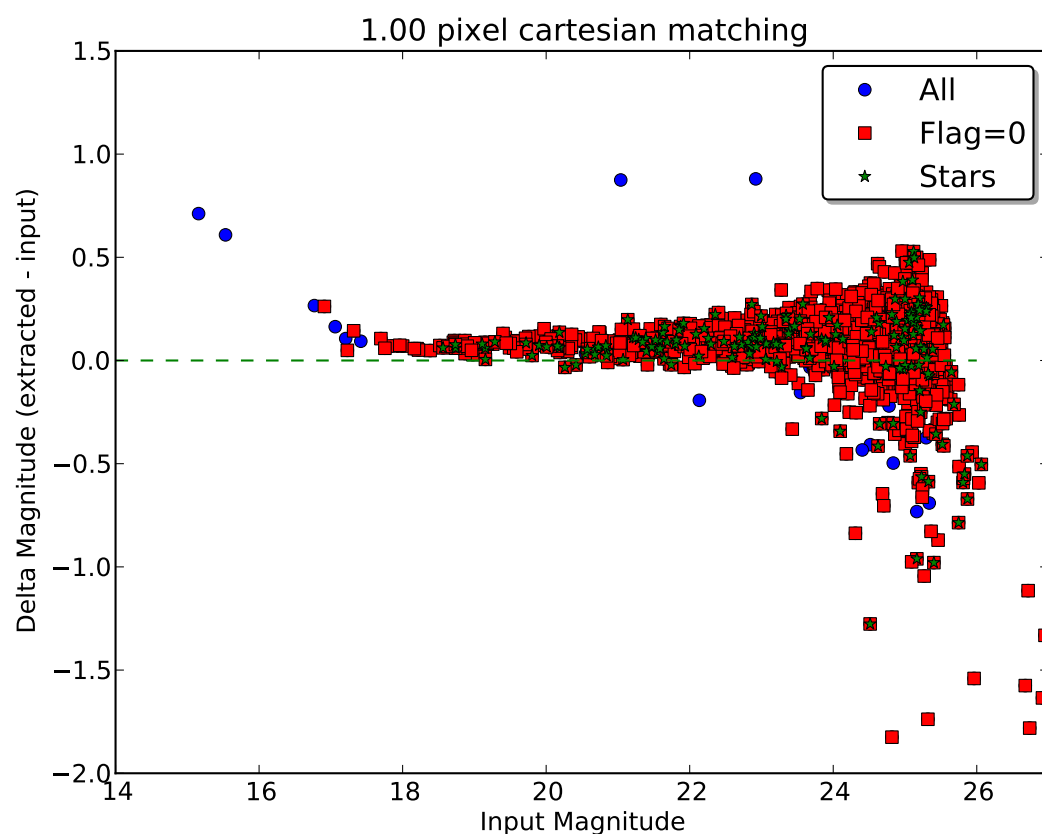


Figure 10.1: Example showing the recovered photometry from a reference simulator image with realistic noise, average background, and end-of-life radiation damage, but without aperture correction. The offset is about 0.08mag.

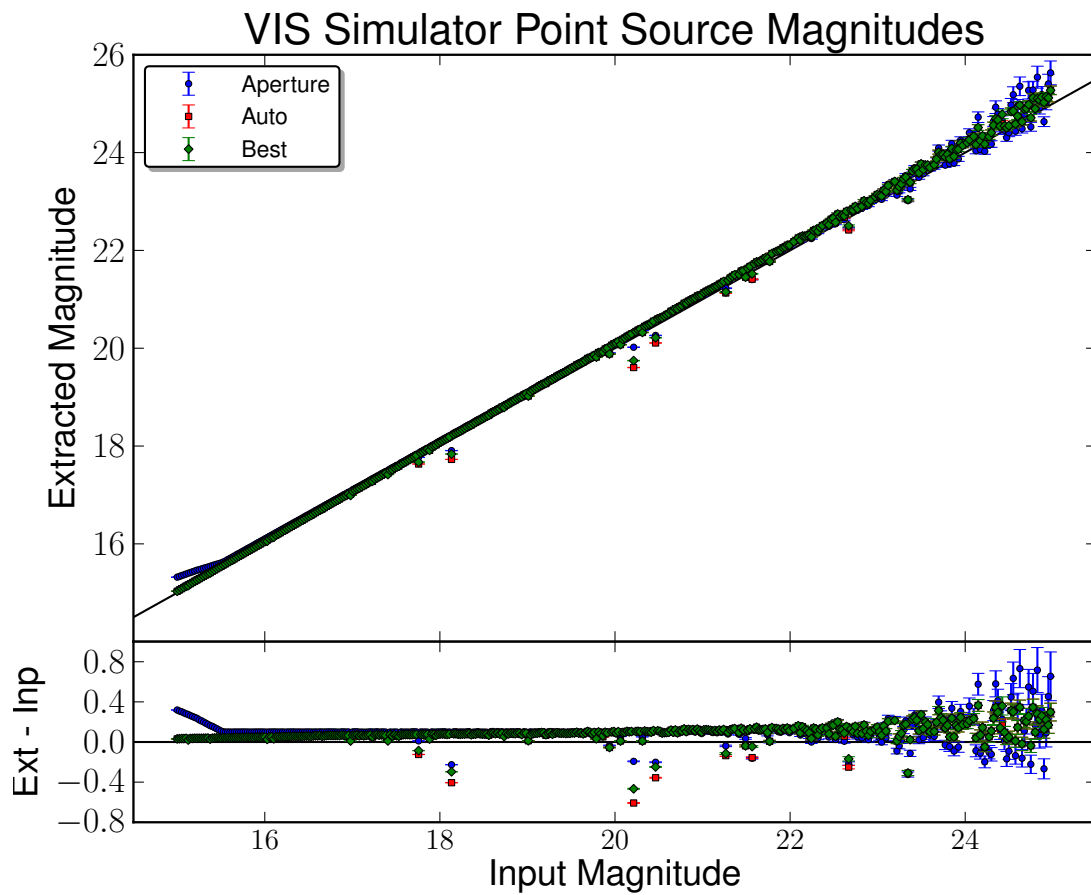


Figure 10.2: Example showing the recovered photometry for point sources from a reference simulator image with realistic noise and an average background, but without any radiation damage to the CCD.

INDICES AND TABLES

- *genindex*
- *modindex*
- *search*

PYTHON MODULE INDEX

a

`analysis.analyse`, [41](#)
`analysis.biasCalibration`, [34](#)
`analysis.ETC`, [13](#)
`analysis.FlatfieldCalibration`,
 [37](#)
`analysis.PSFproperties`, [47](#)
`analysis.shape`, [42](#)
`analysis.sourceFinder`, [44](#)

p

`postproc.postprocessing`, [7](#)
`postproc.tileCCD`, [10](#)

r

`reduction.reduceVISdata`, [33](#)

s

`simulator.generateGalaxies`, [29](#)
`simulator.simulator`, [21](#)
`sources.createObjectCatalogue`,
 [17](#)
`support.VISinstrumentModel`, [5](#)

INDEX

A

- addChargeInjection() (simulator.simulator.VISsimulator method), 25
- addCosmicRays() (simulator.simulator.VISsimulator method), 25
- addLampFlux() (simulator.simulator.VISsimulator method), 25
- addObjects() (simulator.generateGalaxies.generateFakeData method), 30
- addObjects() (simulator.simulator.VISsimulator method), 25
- addPreOverScans() (simulator.simulator.VISsimulator method), 25
- addReadoutNoise() (in module analysis.biasCalibration), 34
- analyseVISdata (class in analysis.analyse), 41
- analysis.analyse (module), 41
- analysis.biasCalibration (module), 34
- analysis.ETC (module), 13
- analysis.FlatfieldCalibration (module), 37
- analysis.PSFproperties (module), 47
- analysis.shape (module), 42
- analysis.sourceFinder (module), 44
- applyBias() (simulator.simulator.VISsimulator method), 26
- applyBleeding() (simulator.simulator.VISsimulator method), 26
- applyCosmetics() (simulator.simulator.VISsimulator method), 26
- applyCTICorrection() (reduction.reduceVISdata.reduceVISdata method), 34
- applyFlatfield() (simulator.simulator.VISsimulator method), 26
- applyLinearCorrection() (postproc.postprocessing.PostProcessing method), 8
- applyNoise() (simulator.simulator.VISsimulator method), 26
- applyNonlinearity() (simulator.simulator.VISsimulator method), 26
- applyRadiationDamage() (postproc.postprocessing.PostProcessing method), 8
- applyRadiationDamage() (simulator.simulator.VISsimulator method), 26
- applyReadoutNoise() (postproc.postprocessing.PostProcessing method), 9
- applyReadoutNoise() (simulator.simulator.VISsimulator method), 26

C

- CCDnonLinearityModel() (in module support.VISinstrumentModel), 5
- CCDnonLinearityModelSinusoidal() (in module support.VISinstrumentModel), 6
- circular2DGaussian() (analysis.shape.shapeMeasurement method), 43
- cleanSample() (analysis.sourceFinder.sourceFinder

- method), [44](#), [46](#)
compressAndRemoveFile() (post-proc.postprocessing.PostProcessing method), [9](#)
configure() (simulator.simulator.VISsimulator method), [26](#)
cosmicRayIntercepts() (simulator.simulator.VISsimulator method), [26](#)
createGalaxylist() (simulator.generateGalaxies.generateFakeData method), [30](#)
createStarlist() (simulator.generateGalaxies.generateFakeData method), [30](#)
cutoutRegion() (post-proc.postprocessing.PostProcessing method), [9](#)
- ## D
- discretise() (simulator.simulator.VISsimulator method), [27](#)
discretisetoADUs() (post-proc.postprocessing.PostProcessing method), [9](#)
doAll() (analysis.analyse.analyseVISdata method), [42](#)
doAperturePhotometry() (analysis.sourceFinder.sourceFinder method), [44](#), [46](#)
drawFromCumulativeDistributionFunction() (in module sources.createObjectCatalogue), [17](#)
- ## E
- electrons2ADU() (simulator.simulator.VISsimulator method), [27](#)
encircledEnergy() (in module analysis.PSFproperties), [47](#)
exposureTime() (in module analysis.ETC), [14](#)
- ## F
- find() (analysis.sourceFinder.sourceFinder method), [45](#), [46](#)
findSources() (analysis.analyse.analyseVISdata method), [42](#)
findTolerableError() (in module analysis.FlatfieldCalibration), [38](#)
findTolerableErrorPiston() (in module analysis.biasCalibration), [35](#)
findTolerableErrorSlope() (in module analysis.biasCalibration), [35](#)
flatfield() (reduction.reduceVISdata.reduceVISdata method), [34](#)
- ## G
- Gaussian2D() (analysis.shape.shapeMeasurement method), [43](#)
generateCatalog() (in module sources.createObjectCatalogue), [18](#)
generateCTImap() (post-proc.postprocessing.PostProcessing method), [9](#)
generateFakeData (class in simulator.generateGalaxies), [30](#)
generateFinemaps() (simulator.simulator.VISsimulator method), [27](#)
generateOutput() (analysis.sourceFinder.sourceFinder method), [45](#), [46](#)
generatePlots() (in module analysis.PSFproperties), [47](#)
generateResidualFlatField() (in module analysis.FlatfieldCalibration), [38](#)
getCenterOfMass() (analysis.sourceFinder.sourceFinder method), [45](#), [46](#)
getContours() (analysis.sourceFinder.sourceFinder method), [45](#), [46](#)
getFluxes() (analysis.sourceFinder.sourceFinder method), [45](#), [46](#)
getSizes() (analysis.sourceFinder.sourceFinder method), [45](#), [46](#)
- ## L
- limitingMagnitude() (in module analysis.ETC), [15](#)

- loadFITS() (postproc.postprocessing.PostProcessing method), 10
- ## M
- maskCrazyValues() (simulator.generateGalaxies.generateFakeData method), 30
- measureChars() (in module analysis.PSFproperties), 47
- measureEllipticity() (analysis.analyse.analyseVISdata method), 42
- measureRefinedEllipticity() (analysis.shape.shapeMeasurement method), 43
- ## O
- objectOnDetector() (simulator.simulator.VISsimulator method), 27
- overlayToCCD() (simulator.simulator.VISsimulator method), 27
- ## P
- parseName() (in module analysis.PSFproperties), 47
- peakFraction() (in module analysis.PSFproperties), 47
- plot() (analysis.sourceFinder.sourceFinder method), 45, 46
- plotDeltaEs() (in module analysis.biasCalibration), 35
- plotDistributionFunction() (in module sources.createObjectCatalogue), 18
- plotEllipticityDistribution() (analysis.analyse.analyseVISdata method), 42
- plotEncircledEnergy() (in module analysis.PSFproperties), 47
- plotEs() (in module analysis.biasCalibration), 35
- plotNumberOfFrames() (in module analysis.FlatfieldCalibration), 39
- plotNumberOfFramesDelta() (in module analysis.biasCalibration), 36
- plotNumberOfFramesSigma() (in module analysis.biasCalibration), 36
- postproc.postprocessing (module), 7
- postproc.tileCCD (module), 10
- PostProcessing (class in postproc.postprocessing), 8
- processConfigs() (simulator.simulator.VISsimulator method), 27
- ## Q
- quadrupoles() (analysis.shape.shapeMeasurement method), 43
- ## R
- radiateFullCCD() (postproc.postprocessing.PostProcessing method), 10
- readConfigs() (simulator.simulator.VISsimulator method), 28
- readCosmicRayInformation() (simulator.simulator.VISsimulator method), 28
- readData() (in module analysis.PSFproperties), 48
- readData() (postproc.tileCCD.tileCCD method), 11
- readObjectlist() (simulator.simulator.VISsimulator method), 28
- readPSFs() (simulator.simulator.VISsimulator method), 29
- readSources() (analysis.analyse.analyseVISdata method), 42
- reduceVISdata (class in reduction.reduceVISdata), 33
- reduction.reduceVISdata (module), 33
- run() (postproc.postprocessing.PostProcessing method), 10
- runAll() (analysis.sourceFinder.sourceFinder method), 45, 47
- runAll() (postproc.tileCCD.tileCCD method), 11
- runAll() (simulator.generateGalaxies.generateFakeData method), 30

S

shapeMeasurement (class in analysis.shape),
[42](#)

simulate() (simulator.simulator.VISsimulator
method), [29](#)

simulator.generateGalaxies (module), [29](#)

simulator.simulator (module), [21](#)

SNR() (in module analysis.ETC), [13](#)

SNRproptoPeak() (in module analysis.ETC),
[14](#)

sourceFinder (class in analysis.sourceFinder),
[44](#), [45](#)

sources.createObjectCatalogue (module), [17](#)

starCatalog() (in module
sources.createObjectCatalogue),
[18](#)

starCatalogFixedMagnitude() (in module
sources.createObjectCatalogue), [18](#)

subtractBias() (reduc-
tion.reduceVISdata.reduceVISdata
method), [34](#)

support.VISinstrumentModel (module), [5](#)

T

testBiasCalibrationDelta() (in module analy-
sis.biasCalibration), [36](#)

testBiasCalibrationSigma() (in module analy-
sis.biasCalibration), [37](#)

testFlatCalibration() (in module analy-
sis.FlatfieldCalibration), [40](#)

testNoFlatfieldingEffects() (in module analy-
sis.FlatfieldCalibration), [40](#)

testNonLinearity() (in module sup-
port.VISinstrumentModel), [7](#)

tileCCD (class in postproc.tileCCD), [11](#)

tileCCD() (postproc.tileCCD.tileCCD
method), [11](#)

V

VISinformation() (in module sup-
port.VISinstrumentModel), [6](#)

VISsimulator (class in simulator.simulator),
[25](#)

W

writeFITS() (analy-
sis.shape.shapeMeasurement
method), [44](#)

writeFITSfile() (post-
proc.postprocessing.PostProcessing
method), [10](#)

writeFITSfile() (postproc.tileCCD.tileCCD
method), [11](#)

writeFITSfile() (reduc-
tion.reduceVISdata.reduceVISdata
method), [34](#)

writeFITSfile() (simula-
tor.simulator.VISsimulator method),
[29](#)

writeOutputs() (simula-
tor.simulator.VISsimulator method),
[29](#)

writePhotometry() (analy-
sis.sourceFinder.sourceFinder
method), [45](#), [47](#)

writeResults() (analy-
sis.analyse.analyseVISdata method),
[42](#)