

Data Mining

Cluster Analysis: Basic Concepts and Algorithms

Lecture Notes for Chapter 7


Introduction to Data Mining
by
Tan, Steinbach, Kumar

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

1

What is Cluster Analysis?

- Given a set of objects, place them in groups such that the objects in a group are similar (or related) to one another and different from (or unrelated to) the objects in other groups

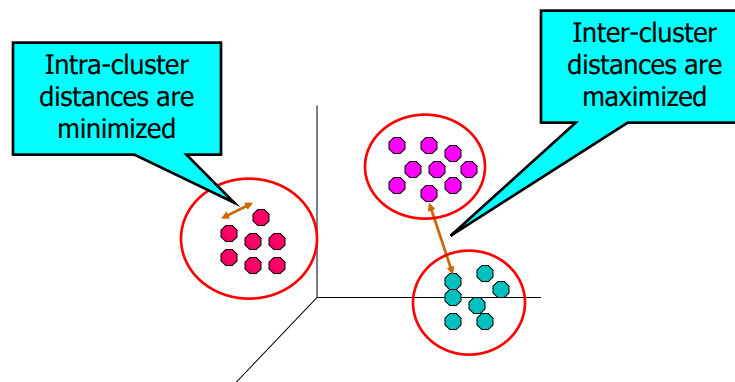

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

2

2

Applications of Cluster Analysis


● Understanding

- Group related documents for browsing, group genes and proteins that have similar functionality, or group stocks with similar price fluctuations

	Discovered Clusters	Industry Group
1	Applied-Matl-DOWN, Bay-Network-DOWN, 3-COM-DOWN, Cabletron-Sys-DOWN, CISCO-DOWN, HP-DOWN, DSC-Comm-DOWN, INTEL-DOWN, LSI-Logic-DOWN, Micron-Tech-DOWN, Texas-Inst-DOWN, Tellabs-Inc-DOWN, Natl-Semiconduct-DOWN, Oracle-DOWN, SGI-DOWN, Sun-DOWN	Technology1-DOWN
2	Apple-Comp-DOWN, Autodesk-DOWN, DEC-DOWN, ADV-Micro-Device-DOWN, Andrew-Corp-DOWN, Computer-Assoc-DOWN, Circuit-City-DOWN, Compaq-DOWN, EMC-Corp-DOWN, Gen-Inst-DOWN, Motorola-DOWN, Microsoft-DOWN, Scientific-Atl-DOWN	Technology2-DOWN
3	Fannie-Mac-DOWN, Fed-Home-Loan-DOWN, MBNA-Corp-DOWN, Morgan-Stanley-DOWN	Financial-DOWN
4	Baker-Hughes-UP, Dresser-Inds-UP, Halliburton-HLD-UP, Louisiana-Land-UP, Phillips-Petro-UP, Unocal-UP, Schlumberger-UP	Oil-UP

● Summarization

- Reduce the size of large data sets

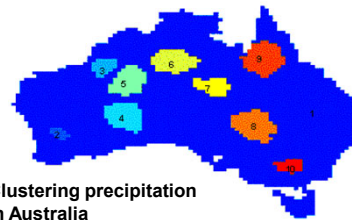


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


3

3



Notion of a Cluster can be Ambiguous





How many clusters?




Six Clusters



Two Clusters



Four Clusters



3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

4

4

Types of Clusterings

- A **clustering** is a set of clusters
- Important distinction between **hierarchical** and **partitional** sets of clusters
 - Partitional Clustering
 - ◆ A division of data objects into non-overlapping subsets (clusters)
 - Hierarchical clustering
 - ◆ A set of nested clusters organized as a hierarchical tree


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar



5

5

Partitional Clustering



Original Points



A Partitional Clustering


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


6

6


Hierarchical Clustering




Traditional Hierarchical Clustering



Traditional Dendrogram



Non-traditional Hierarchical Clustering



Non-traditional Dendrogram

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

7

7

Other Distinctions Between Sets of Clusters

- Exclusive versus non-exclusive
 - In non-exclusive clusterings, points may belong to multiple clusters.
 - ◆ Can belong to multiple classes or could be 'border' points
 - Fuzzy clustering (one type of non-exclusive)
 - ◆ In fuzzy clustering, a point belongs to every cluster with some weight between 0 and 1
 - ◆ Weights must sum to 1
 - ◆ Probabilistic clustering has similar characteristics
- Partial versus complete
 - In some cases, we only want to cluster some of the data

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

8

8

Types of Clusters

- Well-separated clusters
- Prototype-based clusters
- Contiguity-based clusters
- Density-based clusters
- Described by an Objective Function

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

9

9

Types of Clusters: Well-Separated

- Well-Separated Clusters:
 - A cluster is a set of points such that any point in a cluster is closer (or more similar) to every other point in the cluster than to any point not in the cluster.

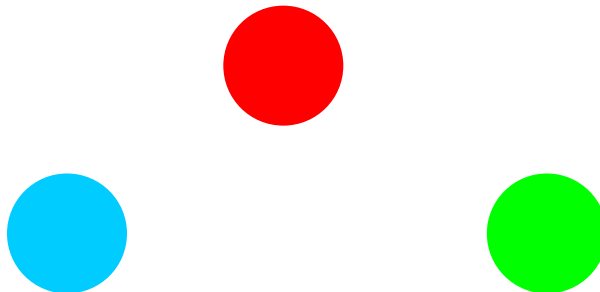

3 well-separated clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

10

10

Types of Clusters: Prototype-Based

- Prototype-based

- A cluster is a set of objects such that an object in a cluster is closer (more similar) to the prototype or “center” of a cluster, than to the center of any other cluster
- The center of a cluster is often a **centroid**, the average of all the points in the cluster, or a **medoid**, the most “representative” point of a cluster



4 center-based clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

11

11

Types of Clusters: Contiguity-Based

- Contiguous Cluster (Nearest neighbor or Transitive)

- A cluster is a set of points such that a point in a cluster is closer (or more similar) to one or more other points in the cluster than to any point not in the cluster.



8 contiguous clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar


12

12

Types of Clusters: Density-Based

- Density-based

- A cluster is a dense region of points, which is separated by low-density regions, from other regions of high density.
- Used when the clusters are irregular or intertwined, and when noise and outliers are present.

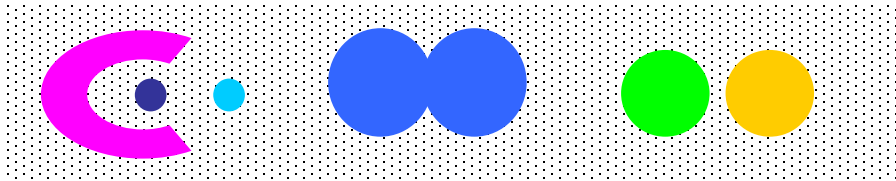

6 density-based clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

13

13

Types of Clusters: Objective Function

- Clusters Defined by an Objective Function

- Finds clusters that minimize or maximize an objective function.
- Enumerate all possible ways of dividing the points into clusters and evaluate the 'goodness' of each potential set of clusters by using the given objective function. (NP Hard)
- Can have global or local objectives.
 - ◆ Hierarchical clustering algorithms typically have local objectives
 - ◆ Partitional algorithms typically have global objectives
- A variation of the global objective function approach is to fit the data to a parameterized model.
 - ◆ Parameters for the model are determined from the data.
 - ◆ Mixture models assume that the data is a 'mixture' of a number of statistical distributions.

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

14

14

Characteristics of the Input Data Are Important

- Type of proximity or density measure
 - Central to clustering
 - Depends on data and application
- Data characteristics that affect proximity and/or density are
 - Dimensionality
 - ◆ Sparseness
 - Attribute type
 - Special relationships in the data
 - ◆ For example, autocorrelation
 - Distribution of the data
- Noise and Outliers
 - Often interfere with the operation of the clustering algorithm
- Clusters of differing sizes, densities, and shapes

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

15

15

Clustering Algorithms

- K-means and its variants
- Hierarchical clustering
- Density-based clustering

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

16

16

K-means Clustering

- Partitional clustering approach
- Number of clusters, K , must be specified
- Each cluster is associated with a **centroid** (center point)
- Each point is assigned to the cluster with the closest centroid
- The basic algorithm is very simple

-
- 1: Select K points as the initial centroids.
 - 2: **repeat**
 - 3: Form K clusters by assigning all points to the closest centroid.
 - 4: Recompute the centroid of each cluster.
 - 5: **until** The centroids don't change
-


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

17


17

Example of K-means Clustering

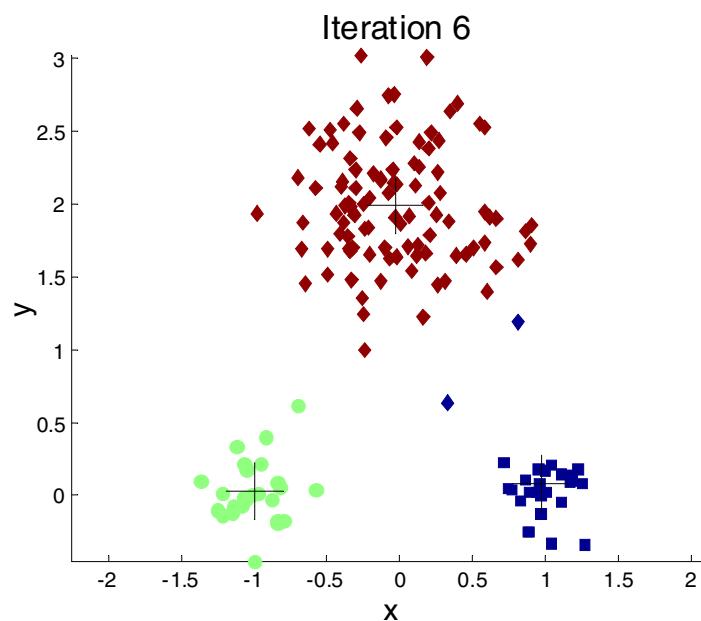

18

Example of K-means Clustering

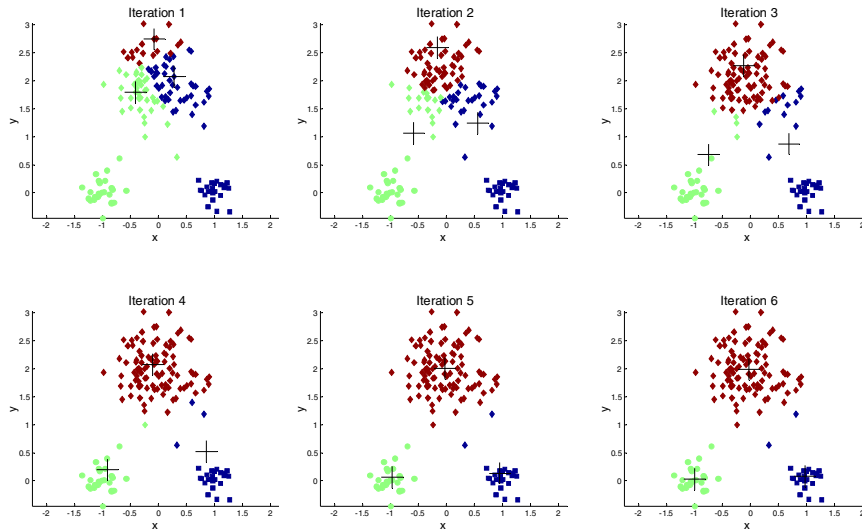

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

19

19

K-means Clustering – Details

- Simple iterative algorithm.
 - Choose initial centroids;
 - repeat {assign each point to a nearest centroid; re-compute cluster centroids}
 - until centroids stop changing.
- Initial centroids are often chosen randomly.
 - Clusters produced can vary from one run to another
- The centroid is (typically) the mean of the points in the cluster, but other definitions are possible (see Table 7.2).
- K-means will converge for common proximity measures with appropriately defined centroid (see Table 7.2)
- Most of the convergence happens in the first few iterations.
 - Often the stopping condition is changed to 'Until relatively few points change clusters'
- Complexity is $O(n * K * I * d)$
 - n = number of points, K = number of clusters, I = number of iterations, d = number of attributes

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

20

20

K-means Objective Function

- A common objective function (used with Euclidean distance measure) is Sum of Squared Error (SSE)
 - For each point, the error is the distance to the nearest cluster center
 - To get SSE, we square these errors and sum them.

$$SSE = \sum_{i=1}^K \sum_{x \in C_i} dist^2(m_i, x)$$

- x is a data point in cluster C_i and m_i is the centroid (mean) for cluster C_i
- SSE improves in each iteration of K-means until it reaches a local or global minima.


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

21

21

Two different K-means Clusterings

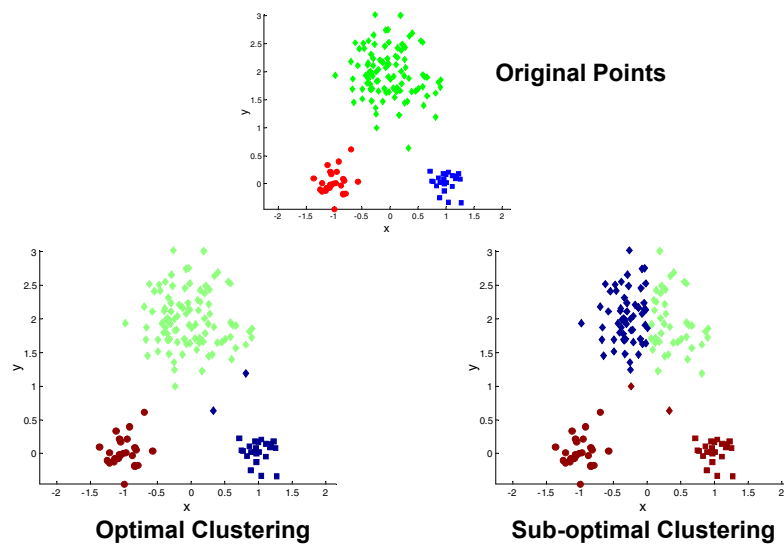


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

22


22

Importance of Choosing Initial Centroids ...

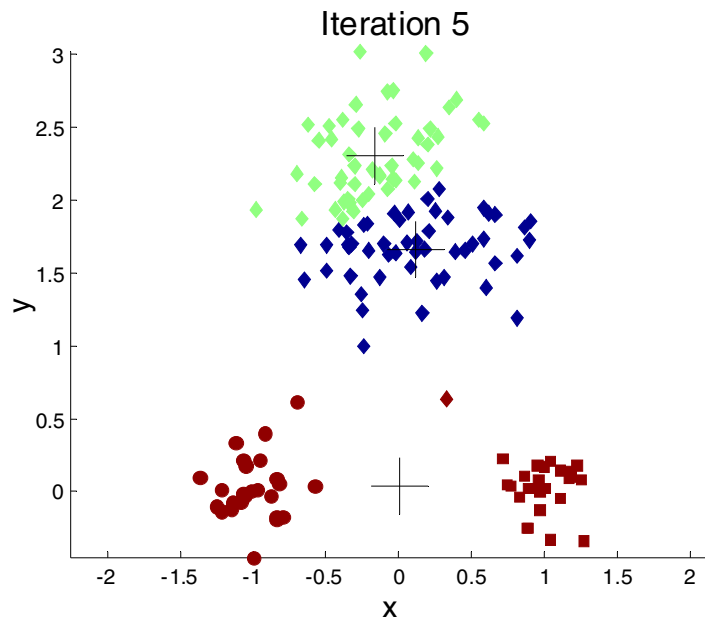

23

Importance of Choosing Initial Centroids ...

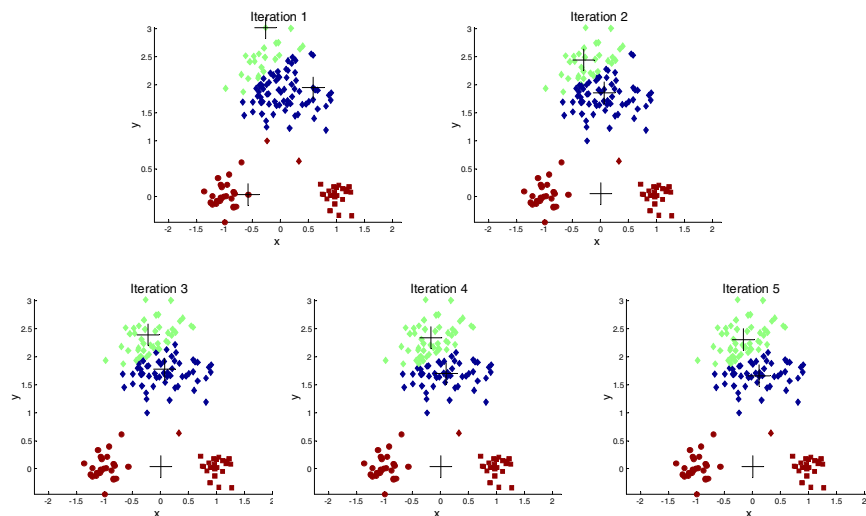

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

24

24

Importance of Choosing Initial Centroids

- Depending on the choice of initial centroids, B and C may get merged or remain separate

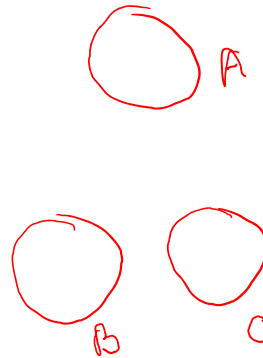

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

25

25

Problems with Selecting Initial Points

- If there are K 'real' clusters then the chance of selecting one centroid from each cluster is small.
 - Chance is relatively small when K is large
 - If clusters are the same size, n , then

$$P = \frac{\text{number of ways to select one centroid from each cluster}}{\text{number of ways to select } K \text{ centroids}} = \frac{K!n^K}{(Kn)^K} = \frac{K!}{K^K}$$

- For example, if $K = 10$, then probability = $10!/10^{10} = 0.00036$
- Sometimes the initial centroids will readjust themselves in 'right' way, and sometimes they don't
- Consider an example of five pairs of clusters


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

26

26

10 Clusters Example

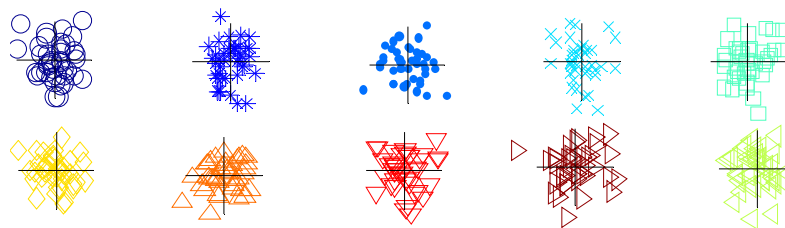

Starting with two initial centroids in one cluster of each pair of clusters


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

27

27

10 Clusters Example

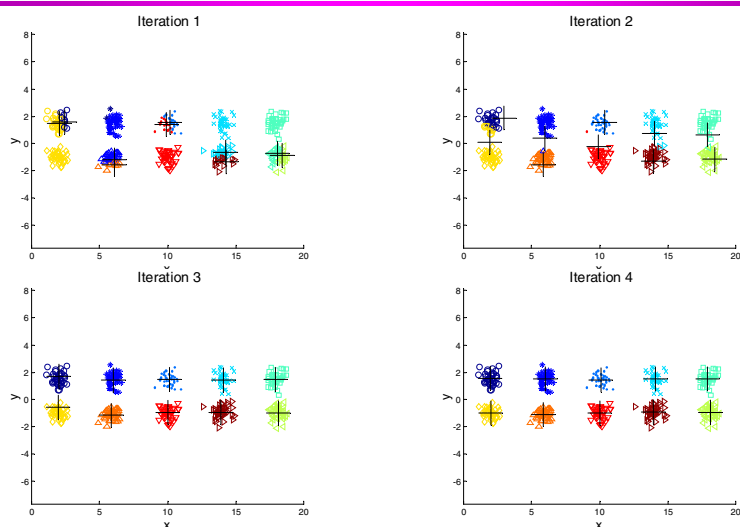

Starting with two initial centroids in one cluster of each pair of clusters


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

28

28

10 Clusters Example

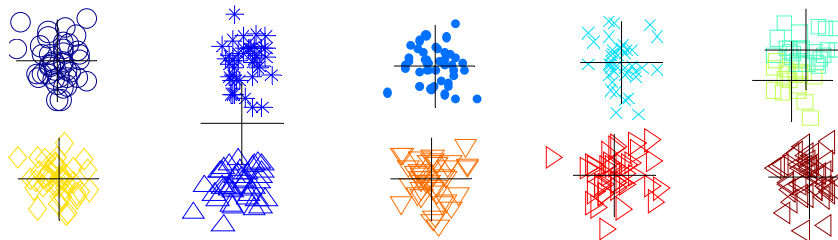

Starting with some pairs of clusters having three initial centroids, while other have only one.


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

29

29

10 Clusters Example

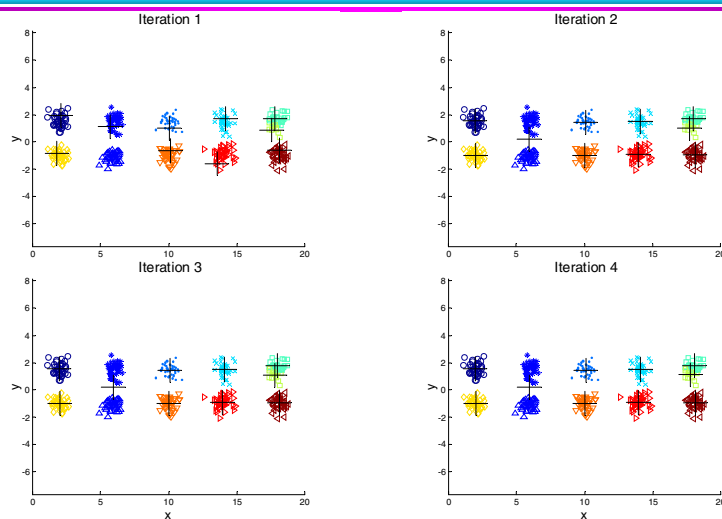

Starting with some pairs of clusters having three initial centroids, while other have only one.

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

30

30

Solutions to Initial Centroids Problem

- Multiple runs
 - Helps, but probability is not on your side
- Use some strategy to select the k initial centroids and then select among these initial centroids
 - Select most widely separated
 - ◆ K-means++ is a robust way of doing this selection
 - Use hierarchical clustering to determine initial centroids
- Bisecting K-means
 - Not as susceptible to initialization issues

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

31

31

K-means++

- This approach can be slower than random initialization, but very consistently produces better results in terms of SSE
 - The k-means++ algorithm guarantees an approximation ratio $O(\log k)$ in expectation, where k is the number of centers
- To select a set of initial centroids, C, perform the following
 1. Select an initial point at random to be the first centroid
 2. For k – 1 steps
 3. For each of the N points, x_i , $1 \leq i \leq N$, find the minimum squared distance to the currently selected centroids, C_1, \dots, C_j , $1 \leq j < k$, i.e., $\min_j d^2(C_j, x_i)$
 4. Randomly select a new centroid by choosing a point with probability proportional to $\frac{\min_j d^2(C_j, x_i)}{\sum_i \min_j d^2(C_j, x_i)}$ is
 5. End For

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

32

32

Bisecting K-means

- Bisecting K-means algorithm

- Variant of K-means that can produce a partitional or a hierarchical clustering

```
1: Initialize the list of clusters to contain the cluster containing all points.
2: repeat
3:   Select a cluster from the list of clusters
4:   for  $i = 1$  to number_of_iterations do
5:     Bisect the selected cluster using basic K-means
6:   end for
7:   Add the two clusters from the bisection with the lowest SSE to the list of clusters.
8: until Until the list of clusters contains  $K$  clusters
```

CLUTO: <http://glaros.dtc.umn.edu/gkhome/cluto/cluto/overview>


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

33

33

Bisecting K-means Example

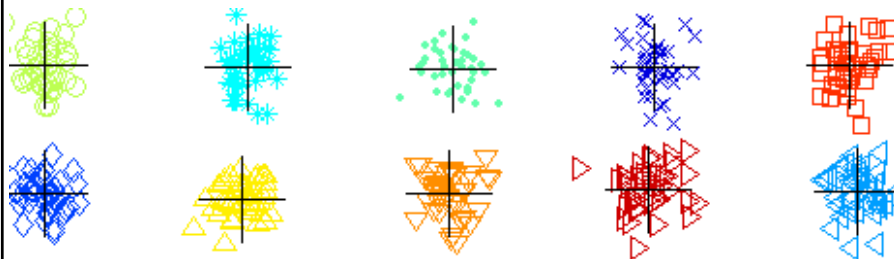

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

34

34

Limitations of K-means

- K-means has problems when clusters are of differing
 - Sizes
 - Densities
 - Non-globular shapes
- K-means has problems when the data contains outliers.
 - One possible solution is to remove outliers before clustering


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


35

35

Limitations of K-means: Differing Sizes

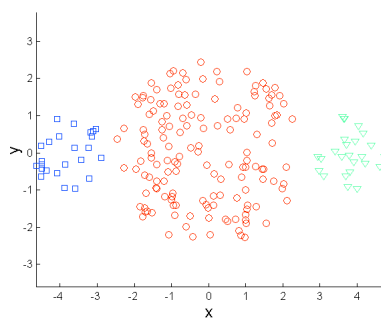

Original Points

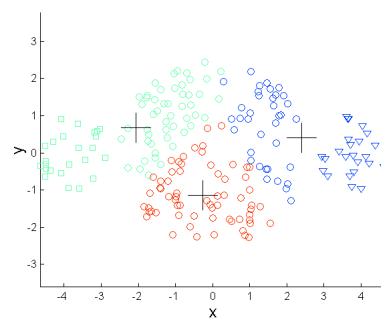

K-means (3 Clusters)


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


36

36

Limitations of K-means: Differing Density

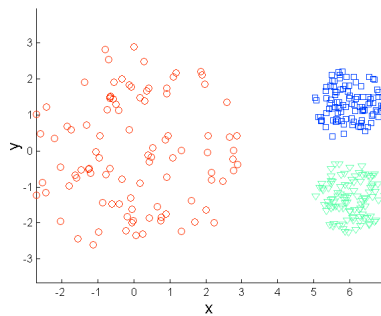

Original Points

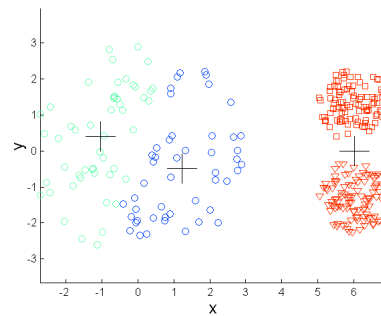

K-means (3 Clusters)


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar


37

37

Limitations of K-means: Non-globular Shapes

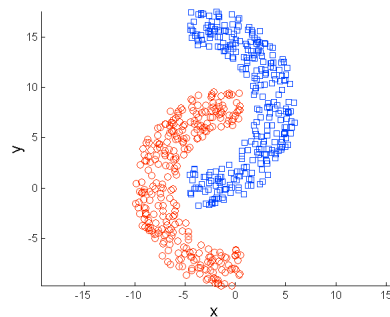

Original Points

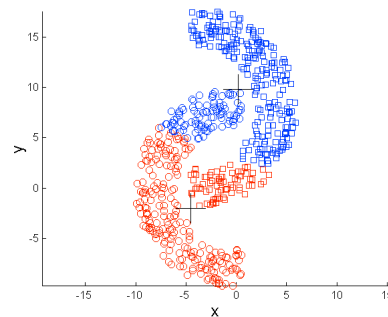

K-means (2 Clusters)


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar


38

38

Overcoming K-means Limitations

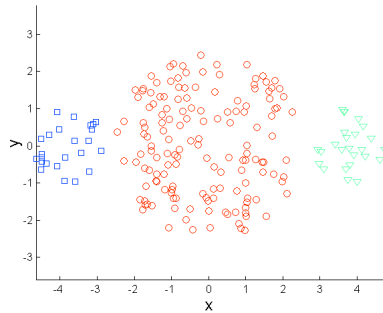

Original Points

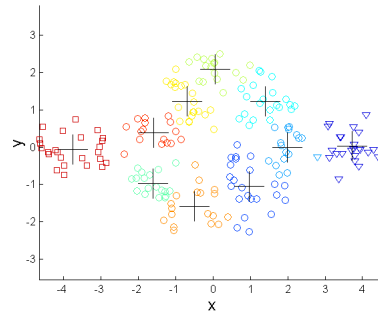

K-means Clusters

One solution is to find a large number of clusters such that each of them represents a part of a natural cluster. But these small clusters need to be put together in a post-processing step.


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar


39

39

Overcoming K-means Limitations

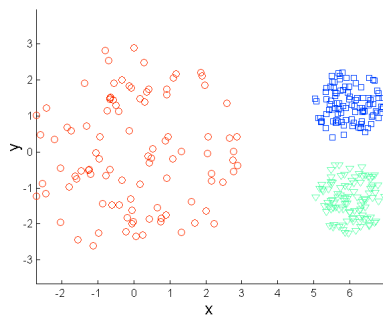

Original Points

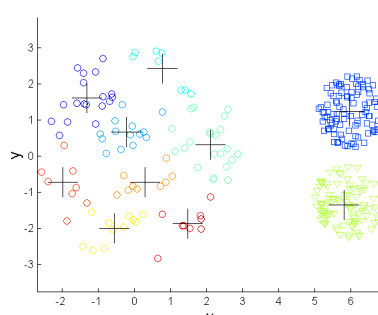

K-means Clusters

One solution is to find a large number of clusters such that each of them represents a part of a natural cluster. But these small clusters need to be put together in a post-processing step.


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

40

40

Overcoming K-means Limitations

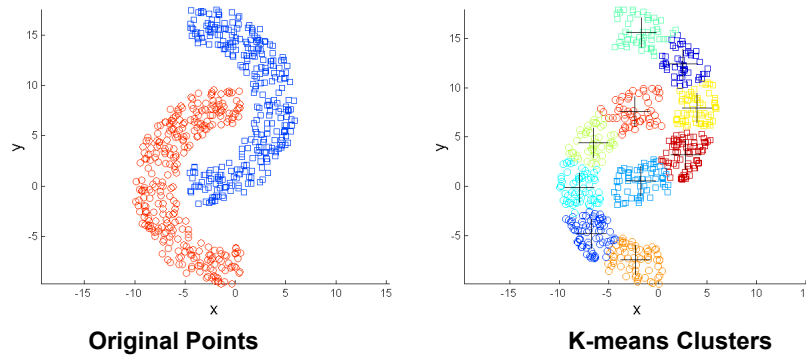

One solution is to find a large number of clusters such that each of them represents a part of a natural cluster. But these small clusters need to be put together in a post-processing step.

3/24/2021



Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

41

41

Hierarchical Clustering

- Produces a set of nested clusters organized as a hierarchical tree
- Can be visualized as a dendrogram
 - A tree like diagram that records the sequences of merges or splits



3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

42

42

Strengths of Hierarchical Clustering

- Do not have to assume any particular number of clusters
 - Any desired number of clusters can be obtained by 'cutting' the dendrogram at the proper level
- They may correspond to meaningful taxonomies
 - Example in biological sciences (e.g., animal kingdom, phylogeny reconstruction, ...)

Hierarchical Clustering

- Two main types of hierarchical clustering
 - Agglomerative:
 - ◆ Start with the points as individual clusters
 - ◆ At each step, merge the closest pair of clusters until only one cluster (or k clusters) left
 - Divisive:
 - ◆ Start with one, all-inclusive cluster
 - ◆ At each step, split a cluster until each cluster contains an individual point (or there are k clusters)
- Traditional hierarchical algorithms use a similarity or distance matrix
 - Merge or split one cluster at a time

Agglomerative Clustering Algorithm

- **Key Idea: Successively merge closest clusters**
- Basic algorithm
 1. Compute the proximity matrix
 2. Let each data point be a cluster
 3. **Repeat**
 4. Merge the two closest clusters
 5. Update the proximity matrix
 6. **Until** only a single cluster remains
- Key operation is the computation of the proximity of two clusters
 - Different approaches to defining the distance between clusters distinguish the different algorithms

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpate, Kumar

45

45

Steps 1 and 2

- Start with clusters of individual points and a proximity matrix

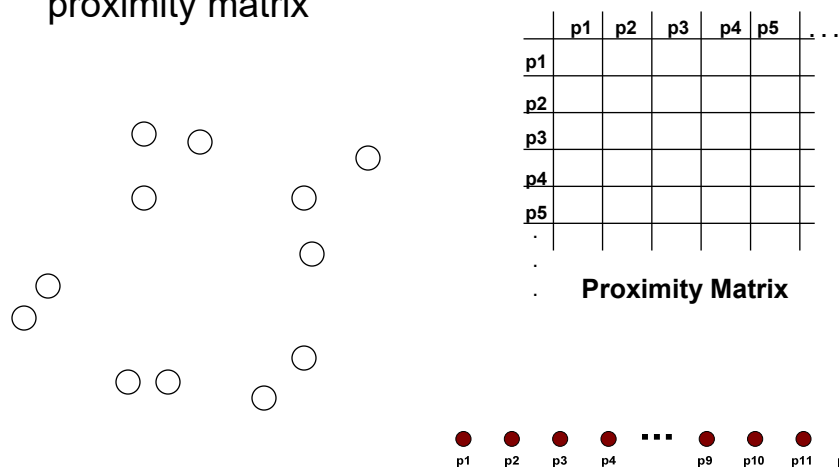

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpate, Kumar

46

46


Intermediate Situation

- After some merging steps, we have some clusters

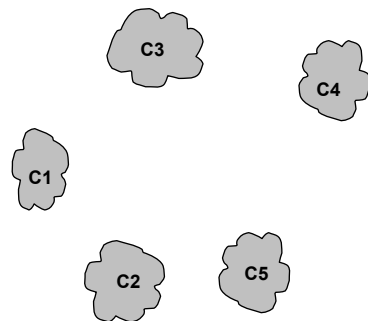

	C1	C2	C3	C4	C5
C1					
C2					
C3					
C4					
C5					

Proximity Matrix

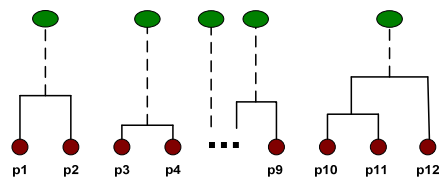

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpapne, Kumar

47

47


Step 4

- We want to merge the two closest clusters (C2 and C5) and update the proximity matrix.

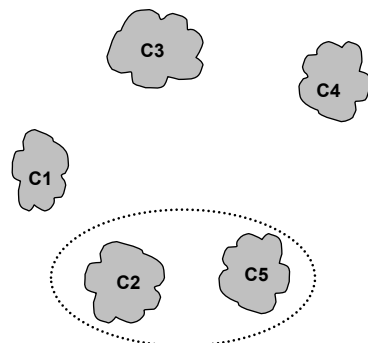

	C1	C2	C3	C4	C5
C1					
C2					
C3					
C4					
C5					

Proximity Matrix

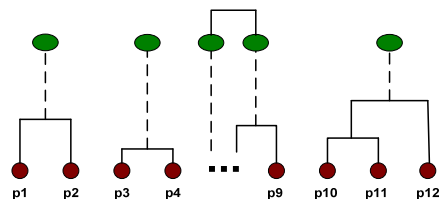

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpapne, Kumar

48

48

Step 5

- The question is “How do we update the proximity matrix?”

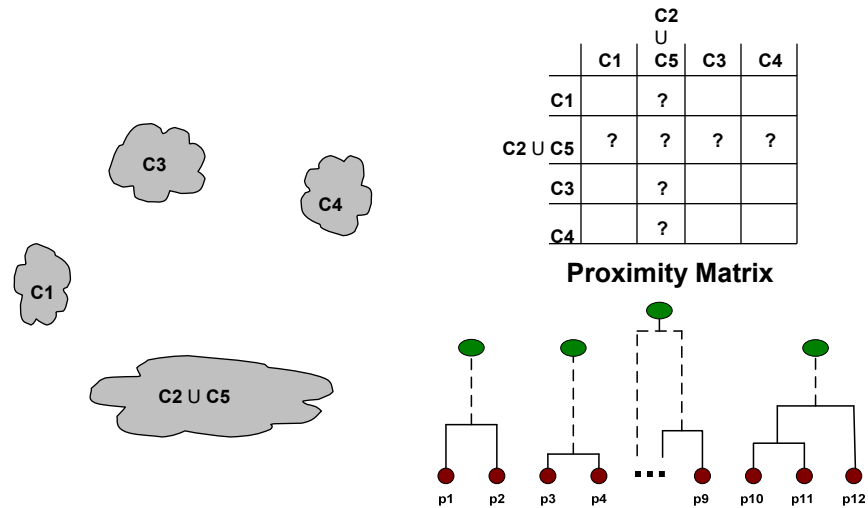


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpapne, Kumar

49

49

How to Define Inter-Cluster Distance

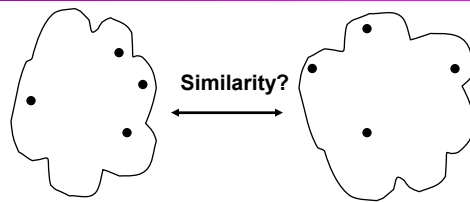

- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

	p1	p2	p3	p4	p5	...
p1						
p2						
p3						
p4						
p5						
.						
.						
.						

Proximity Matrix


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpapne, Kumar

50

50

How to Define Inter-Cluster Similarity

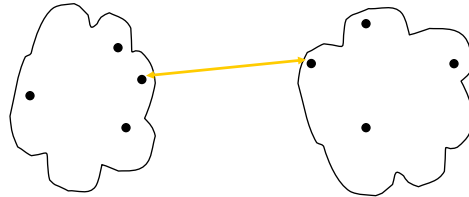

- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

	p1	p2	p3	p4	p5	...
p1						
p2						
p3						
p4						
p5						

Proximity Matrix


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

51

51

How to Define Inter-Cluster Similarity

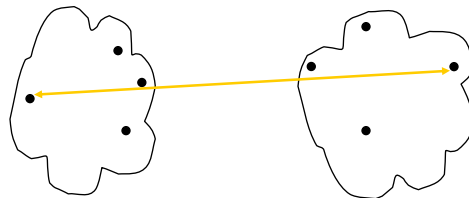

- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

	p1	p2	p3	p4	p5	...
p1						
p2						
p3						
p4						
p5						

Proximity Matrix


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

52

52

How to Define Inter-Cluster Similarity

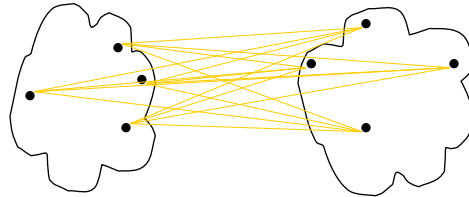

- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

	p1	p2	p3	p4	p5	...
p1						
p2						
p3						
p4						
p5						

Proximity Matrix


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

53

53

How to Define Inter-Cluster Similarity

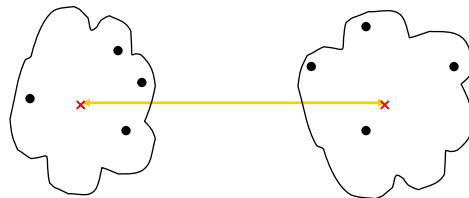

- MIN
- MAX
- Group Average
- Distance Between Centroids
- Other methods driven by an objective function
 - Ward's Method uses squared error

	p1	p2	p3	p4	p5	...
p1						
p2						
p3						
p4						
p5						

Proximity Matrix

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

54

54

MIN or Single Link

- Proximity of two clusters is based on the two closest points in the different clusters
 - Determined by one pair of points, i.e., by one link in the proximity graph
- Example:



Distance Matrix:

	p1	p2	p3	p4	p5	p6
p1	0.00	0.24	0.22	0.37	0.34	0.23
p2	0.24	0.00	0.15	0.20	0.14	0.25
p3	0.22	0.15	0.00	0.15	0.28	0.11
p4	0.37	0.20	0.15	0.00	0.29	0.22
p5	0.34	0.14	0.28	0.29	0.00	0.39
p6	0.23	0.25	0.11	0.22	0.39	0.00


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpotne, Kumar


55

55

Hierarchical Clustering: MIN

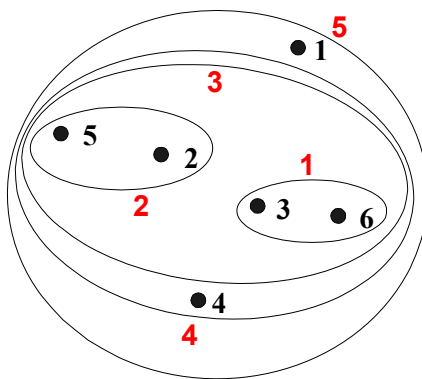

Nested Clusters

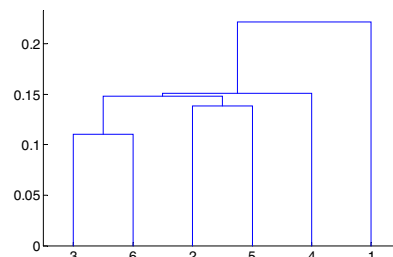

Dendrogram


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpotne, Kumar


56

56

Strength of MIN

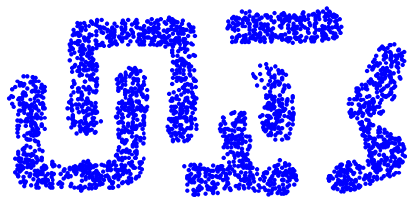

Original Points

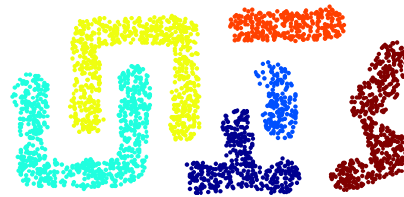

Six Clusters

- Can handle non-elliptical shapes


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar


57

57


Limitations of MIN

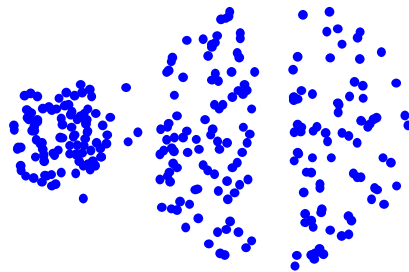

Original Points

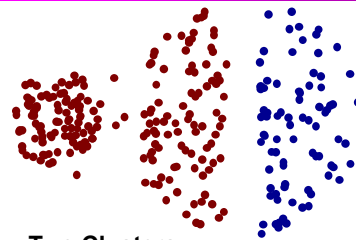

Two Clusters

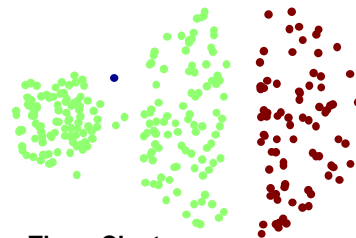

Three Clusters

- Sensitive to noise

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

58

58

MAX or Complete Linkage

- Proximity of two clusters is based on the two most distant points in the different clusters
 - Determined by all pairs of points in the two clusters

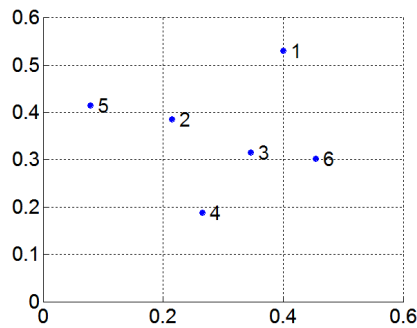

Distance Matrix:

	p1	p2	p3	p4	p5	p6
p1	0.00	0.24	0.22	0.37	0.34	0.23
p2	0.24	0.00	0.15	0.20	0.14	0.25
p3	0.22	0.15	0.00	0.15	0.28	0.11
p4	0.37	0.20	0.15	0.00	0.29	0.22
p5	0.34	0.14	0.28	0.29	0.00	0.39
p6	0.23	0.25	0.11	0.22	0.39	0.00


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


59

59

Hierarchical Clustering: MAX

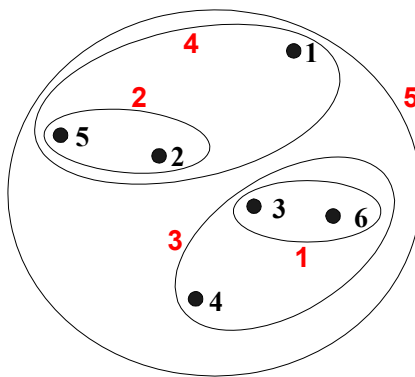

Nested Clusters

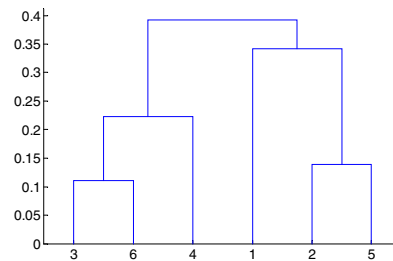

Dendrogram


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

60

60

Strength of MAX

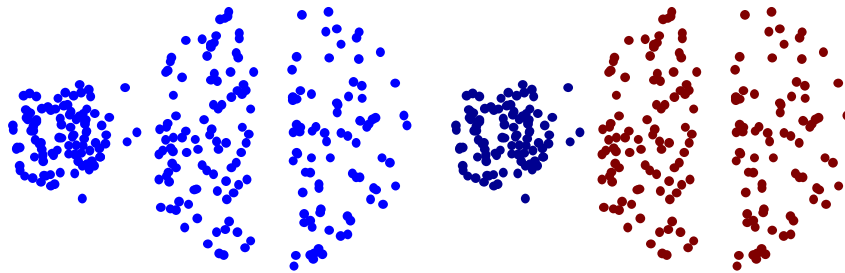

Original Points

Two Clusters

- Less susceptible to noise


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

61

61

Limitations of MAX

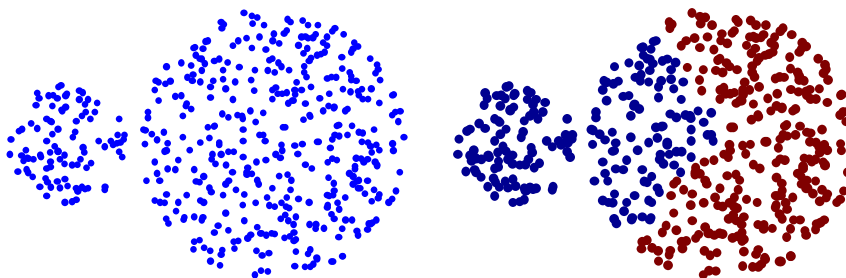

Original Points

Two Clusters

- Tends to break large clusters
- Biased towards globular clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar


62

62

Group Average

- Proximity of two clusters is the average of pairwise proximity between points in the two clusters.

$$\text{proximity}(\text{Cluster}_i, \text{Cluster}_j) = \frac{\sum_{\substack{p_i \in \text{Cluster}_i \\ p_j \in \text{Cluster}_j}} \text{proximity}(p_i, p_j)}{|\text{Cluster}_i| \times |\text{Cluster}_j|}$$



Distance Matrix:

	p1	p2	p3	p4	p5	p6
p1	0.00	0.24	0.22	0.37	0.34	0.23
p2	0.24	0.00	0.15	0.20	0.14	0.25
p3	0.22	0.15	0.00	0.15	0.28	0.11
p4	0.37	0.20	0.15	0.00	0.29	0.22
p5	0.34	0.14	0.28	0.29	0.00	0.39
p6	0.23	0.25	0.11	0.22	0.39	0.00


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


63

63

Hierarchical Clustering: Group Average

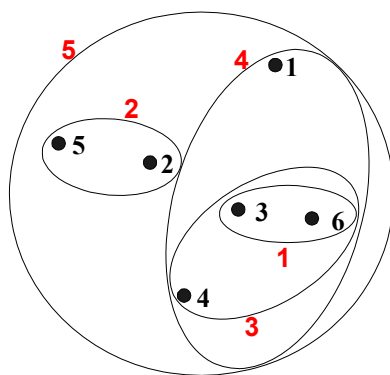

Nested Clusters

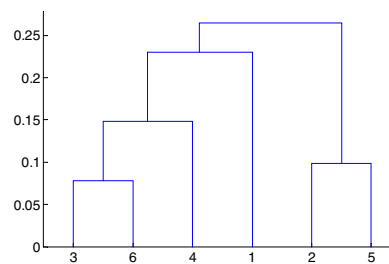

Dendrogram

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

64

64

Hierarchical Clustering: Group Average

- Compromise between Single and Complete Link
- Strengths
 - Less susceptible to noise
- Limitations
 - Biased towards globular clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

65

65

Cluster Similarity: Ward's Method

- Similarity of two clusters is based on the increase in squared error when two clusters are merged
 - Similar to group average if distance between points is distance squared
- Less susceptible to noise
- Biased towards globular clusters
- Hierarchical analogue of K-means
 - Can be used to initialize K-means


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

66

66

Hierarchical Clustering: Comparison

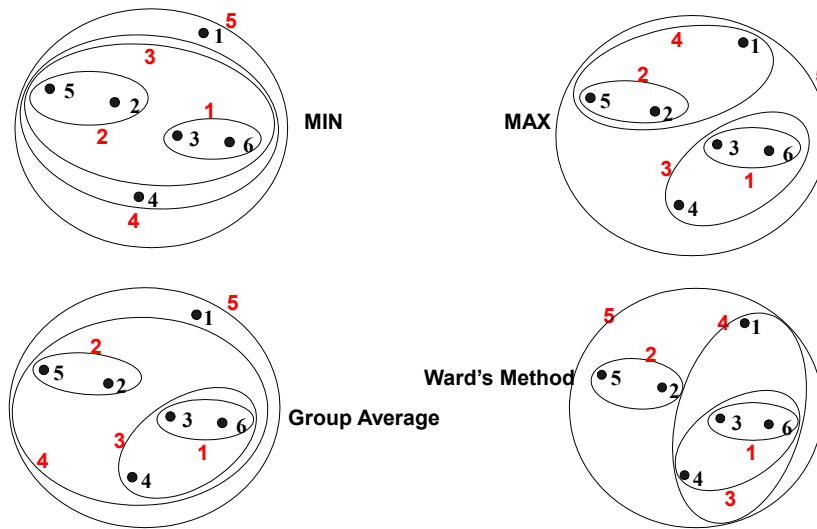

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

67

67

Hierarchical Clustering: Time and Space requirements

- $O(N^2)$ space since it uses the proximity matrix.
 - N is the number of points.
- $O(N^3)$ time in many cases
 - There are N steps and at each step the size, N^2 , proximity matrix must be updated and searched
 - Complexity can be reduced to $O(N^2 \log(N))$ time with some cleverness

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

68

68

Hierarchical Clustering: Problems and Limitations

- Once a decision is made to combine two clusters, it cannot be undone
- No global objective function is directly minimized
- Different schemes have problems with one or more of the following:
 - Sensitivity to noise
 - Difficulty handling clusters of different sizes and non-globular shapes
 - Breaking large clusters

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

69

69

Density Based Clustering

- Clusters are regions of high density that are separated from one another by regions of low density.



3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

70

70

DBSCAN

- DBSCAN is a density-based algorithm.
 - Density = number of points within a specified radius (Eps)
 - A point is a **core point** if it has at least a specified number of points (MinPts) within Eps
 - ◆ These are points that are at the interior of a cluster
 - ◆ Counts the point itself
 - A **border point** is not a core point, but is in the neighborhood of a core point
 - A **noise point** is any point that is not a core point or a border point


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

71

71

DBSCAN: Core, Border, and Noise Points

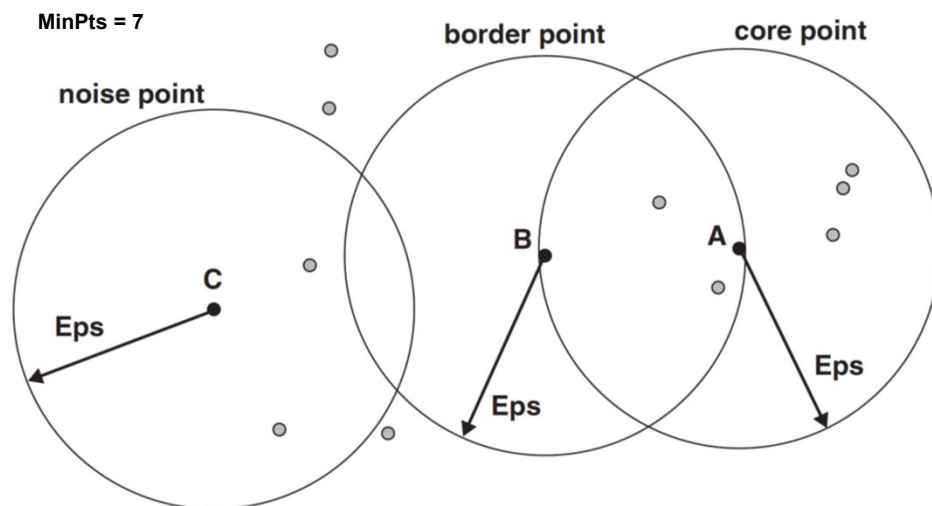


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar


72

72

DBSCAN: Core, Border and Noise Points

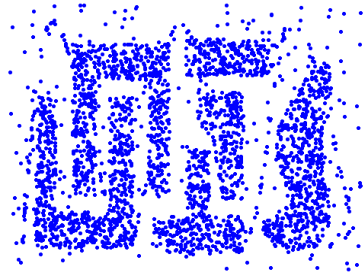

Original Points

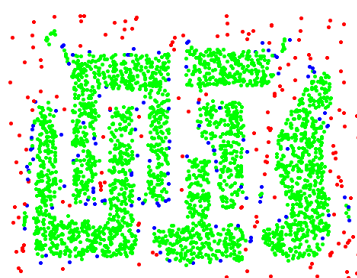

Point types: **core**,
border and **noise**

Eps = 10, MinPts = 4

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

73

73

DBSCAN Algorithm

- Form clusters using core points, and assign border points to one of its neighboring clusters
- 1: Label all points as core, border, or noise points.
 - 2: Eliminate noise points.
 - 3: Put an edge between all core points within a distance Eps of each other.
 - 4: Make each group of connected core points into a separate cluster.
 - 5: Assign each border point to one of the clusters of its associated core points


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar


74

74

When DBSCAN Works Well

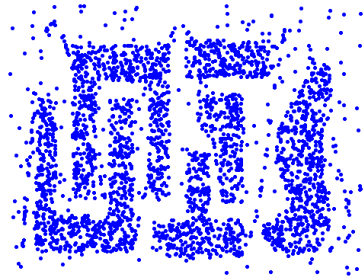

Original Points

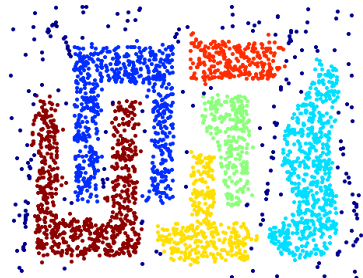

Clusters (dark blue points indicate noise)

- Can handle clusters of different shapes and sizes
- Resistant to noise


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

75

75

When DBSCAN Does NOT Work Well



Original Points


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

76


76

When DBSCAN Does NOT Work Well




Original Points

- Varying densities
- High-dimensional data



(MinPts=4, Eps=9.92).

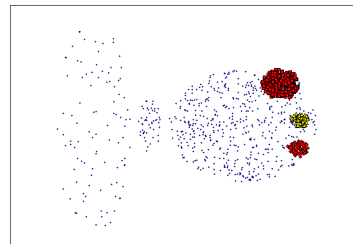

(MinPts=4, Eps=9.75)

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

77

77

DBSCAN: Determining EPS and MinPts

- Idea is that for points in a cluster, their k^{th} nearest neighbors are at close distance
- Noise points have the k^{th} nearest neighbor at farther distance
- So, plot sorted distance of every point to its k^{th} nearest neighbor



3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

78

78

Cluster Validity

- For supervised classification we have a variety of measures to evaluate how good our model is
 - Accuracy, precision, recall
- For cluster analysis, the analogous question is how to evaluate the “goodness” of the resulting clusters?
- But “clusters are in the eye of the beholder”!
 - In practice the clusters we find are defined by the clustering algorithm
- Then why do we want to evaluate them?
 - To avoid finding patterns in noise
 - To compare clustering algorithms
 - To compare two sets of clusters
 - To compare two clusters


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

79

79

Clusters found in Random Data

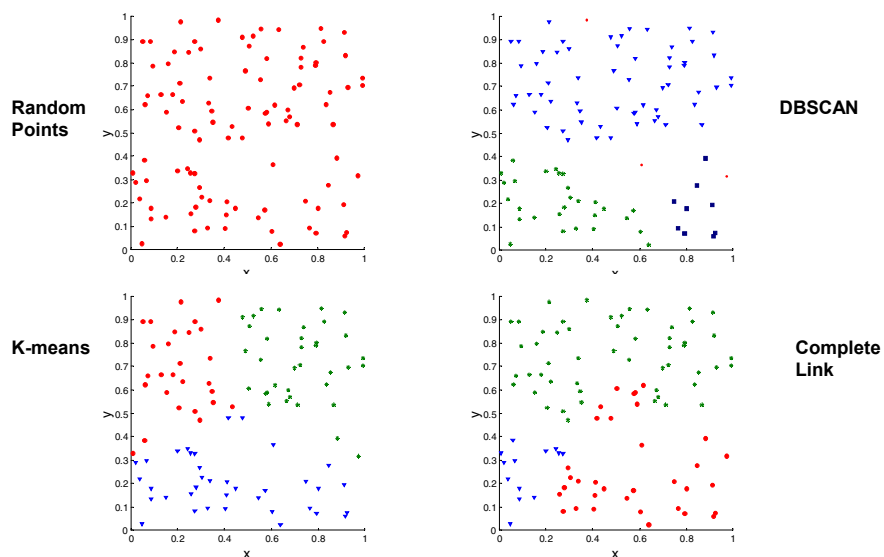

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

80

80

Measures of Cluster Validity

- Numerical measures that are applied to judge various aspects of cluster validity, are classified into the following two types.
 - **Supervised:** Used to measure the extent to which cluster labels match externally supplied class labels.
 - ◆ Entropy
 - ◆ Often called *external indices* because they use information external to the data
 - **Unsupervised:** Used to measure the goodness of a clustering structure *without* respect to external information.
 - ◆ Sum of Squared Error (SSE)
 - ◆ Often called *internal indices* because they only use information in the data
- You can use supervised or unsupervised measures to compare clusters or clusterings

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpapne, Kumar

81

81

Unsupervised Measures: Cohesion and Separation

- **Cluster Cohesion:** Measures how closely related are objects in a cluster
 - Example: SSE
- **Cluster Separation:** Measure how distinct or well-separated a cluster is from other clusters
- Example: Squared Error
 - Cohesion is measured by the within cluster sum of squares (SSE)
$$SSE = \sum_i \sum_{x \in C_i} (x - m_i)^2$$
 - Separation is measured by the between cluster sum of squares
$$SSB = \sum_i |C_i| (m - m_i)^2$$

Where $|C_i|$ is the size of cluster i

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpapne, Kumar


82

82

Unsupervised Measures: Cohesion and Separation

● Example: SSE

- $SSB + SSE = \text{constant}$



K=1 cluster:

$$SSE = (1 - 3)^2 + (2 - 3)^2 + (4 - 3)^2 + (5 - 3)^2 = 10$$

$$SSB = 4 \times (3 - 3)^2 = 0$$

$$Total = 10 + 0 = 10$$

K=2 clusters:

$$SSE = (1 - 1.5)^2 + (2 - 1.5)^2 + (4 - 4.5)^2 + (5 - 4.5)^2 = 1$$

$$SSB = 2 \times (3 - 1.5)^2 + 2 \times (4.5 - 3)^2 = 9$$

$$Total = 1 + 9 = 10$$

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpate, Kumar

83


83

Unsupervised Measures: Cohesion and Separation

- A proximity graph-based approach can also be used for cohesion and separation.
 - Cluster cohesion is the sum of the weight of all links within a cluster.
 - Cluster separation is the sum of the weights between nodes in the cluster and nodes outside the cluster.



cohesion

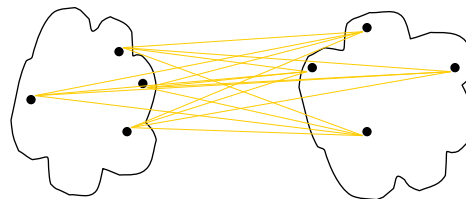

separation

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpate, Kumar

84


84

Unsupervised Measures: Silhouette Coefficient

- Silhouette coefficient combines ideas of both cohesion and separation, but for individual points, as well as clusters and clusterings
- For an individual point, i
 - Calculate a = average distance of i to the points in its cluster
 - Calculate b = min (average distance of i to points in another cluster)
 - The silhouette coefficient for a point is then given by

$$s = (b - a) / \max(a, b)$$

- Value can vary between -1 and 1
- Typically ranges between 0 and 1.
- The closer to 1 the better.



- Can calculate the average silhouette coefficient for a cluster or a clustering

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

85

85

Measuring Cluster Validity Via Correlation

- Two matrices
 - Proximity Matrix
 - Ideal Similarity Matrix
 - ◆ One row and one column for each data point
 - ◆ An entry is 1 if the associated pair of points belong to the same cluster
 - ◆ An entry is 0 if the associated pair of points belongs to different clusters
- Compute the correlation between the two matrices
 - Since the matrices are symmetric, only the correlation between $n(n-1) / 2$ entries needs to be calculated.
- High magnitude of correlation indicates that points that belong to the same cluster are close to each other.
 - Correlation may be positive or negative depending on whether the similarity matrix is a similarity or dissimilarity matrix
- Not a good measure for some density or contiguity based clusters.

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

86

86

Measuring Cluster Validity Via Correlation

- Correlation of ideal similarity and proximity matrices for the K-means clusterings of the following well-clustered data set.

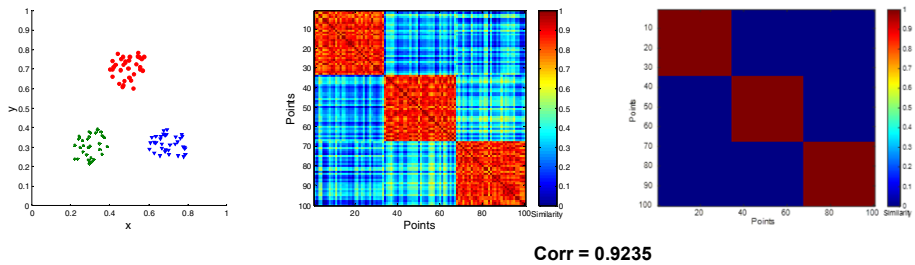

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

87

87

Measuring Cluster Validity Via Correlation

- Correlation of ideal similarity and proximity matrices for the K-means clusterings of the following random data set.

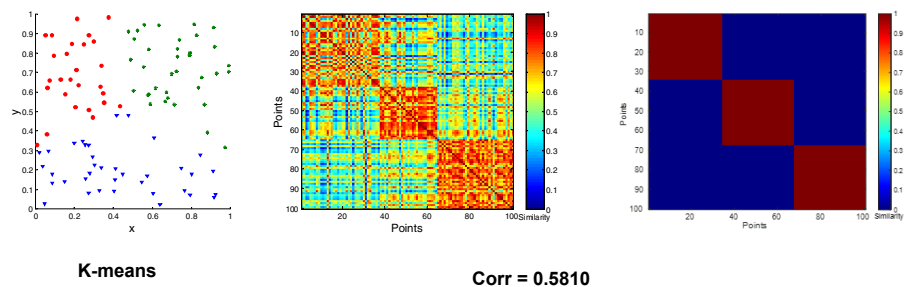

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

88

88

Judging a Clustering Visually by its Similarity Matrix

- Order the similarity matrix with respect to cluster labels and inspect visually.

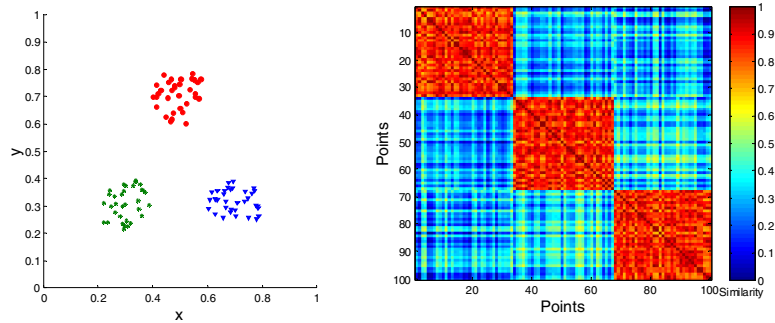

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

89

89

Judging a Clustering Visually by its Similarity Matrix

- Clusters in random data are not so crisp

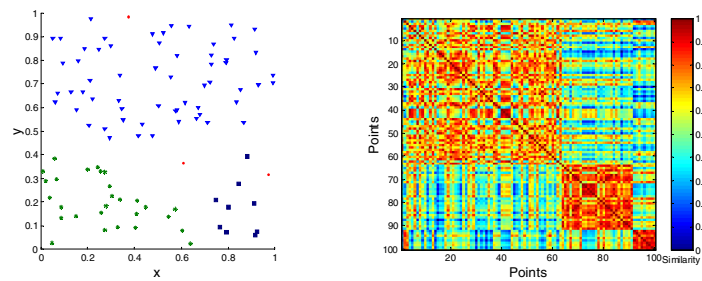

DBSCAN


3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

90

90

Judging a Clustering Visually by its Similarity Matrix

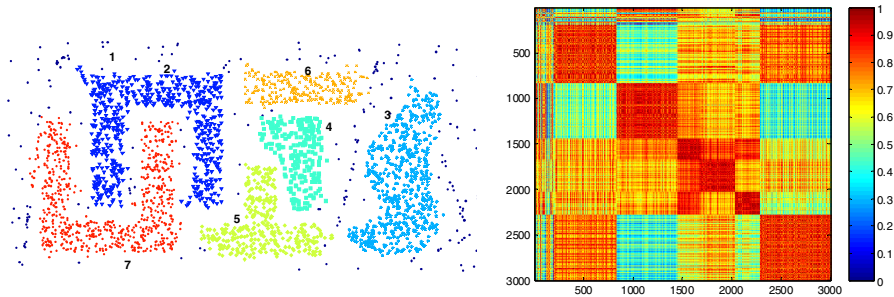

DBSCAN

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

91

91

Determining the Correct Number of Clusters

- SSE is good for comparing two clusterings or two clusters
- SSE can also be used to estimate the number of clusters

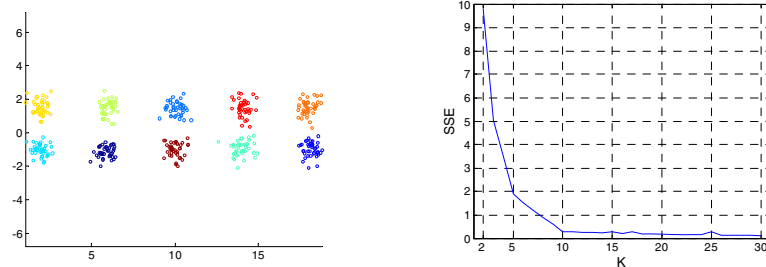

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

92

92

Determining the Correct Number of Clusters

- SSE curve for a more complicated data set

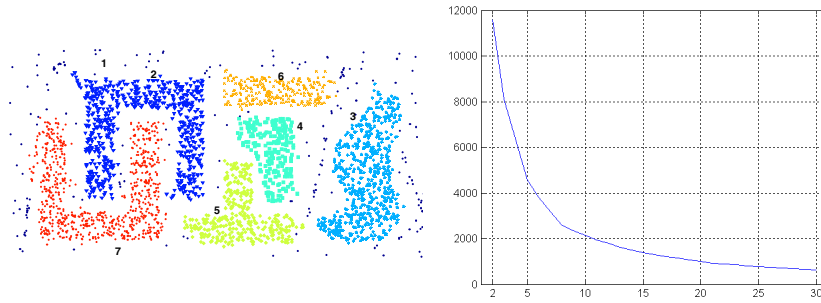

SSE of clusters found using K-means

Supervised Measures of Cluster Validity: Entropy and Purity

Table 5.9. K-means Clustering Results for LA Document Data Set

Cluster	Entertainment	Financial	Foreign	Metro	National	Sports	Entropy	Purity
1	3	5	40	506	96	27	1.2270	0.7474
2	4	7	280	29	39	2	1.1472	0.7756
3	1	1	1	7	4	671	0.1813	0.9796
4	10	162	3	119	73	2	1.7487	0.4390
5	331	22	5	70	13	23	1.3976	0.7134
6	5	358	12	212	48	13	1.5523	0.5525
Total	354	555	341	943	273	738	1.1450	0.7203

entropy For each cluster, the class distribution of the data is calculated first, i.e., for cluster j we compute p_{ij} , the 'probability' that a member of cluster j belongs to class i as follows: $p_{ij} = m_{ij}/m_j$, where m_j is the number of values in cluster j and m_{ij} is the number of values of class i in cluster j . Then using this class distribution, the entropy of each cluster j is calculated using the standard formula $e_j = -\sum_{i=1}^L p_{ij} \log_2 p_{ij}$, where the L is the number of classes. The total entropy for a set of clusters is calculated as the sum of the entropies of each cluster weighted by the size of each cluster, i.e., $e = \sum_{j=1}^K \frac{m_j}{m} e_j$, where m_j is the size of cluster j , K is the number of clusters, and m is the total number of data points.

purity Using the terminology derived for entropy, the purity of cluster j , is given by $\text{purity}_j = \max_i p_{ij}$ and the overall purity of a clustering by $\text{purity} = \sum_{j=1}^K \frac{m_j}{m} \text{purity}_j$.

Assessing the Significance of Cluster Validity Measures

- Need a framework to interpret any measure.
 - For example, if our measure of evaluation has the value, 10, is that good, fair, or poor?
- Statistics provide a framework for cluster validity
 - The more “atypical” a clustering result is, the more likely it represents valid structure in the data
 - Compare the value of an index obtained from the given data with those resulting from random data.
 - ◆ If the value of the index is unlikely, then the cluster results are valid

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

95


95

Statistical Framework for SSE

- Example
 - Compare SSE of three cohesive clusters against three clusters in random data



SSE = 0.005

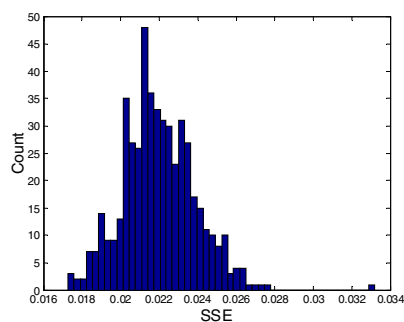

Histogram shows SSE of three clusters in 500 sets of random data points of size 100 distributed over the range 0.2 – 0.8 for x and y values

3/24/2021


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpayne, Kumar

96

96


Statistical Framework for Correlation

- Correlation of ideal similarity and proximity matrices for the K-means clusterings of the following two data sets.




Corr = -0.9235

Correlation is negative because it is calculated between a distance matrix and the ideal similarity matrix. Higher magnitude is better.



Corr = -0.5810

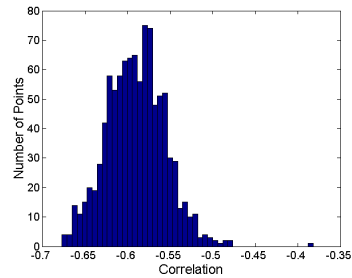

Histogram of correlation for 500 random data sets of size 100 with x and y values of points between 0.2 and 0.8.

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

97

97

Final Comment on Cluster Validity

“The validation of clustering structures is the most difficult and frustrating part of cluster analysis.

Without a strong effort in this direction, cluster analysis will remain a black art accessible only to those true believers who have experience and great courage.”

Algorithms for Clustering Data, Jain and Dubes

- H. Xiong and Z. Li. *Clustering Validation Measures*. In C. C. Aggarwal and C. K. Reddy, editors, *Data Clustering: Algorithms and Applications*, pages 571–605. Chapman & Hall/CRC, 2013.

3/24/2021

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpadne, Kumar

98

98