

SEGURIDAD INFORMÁTICA.

NOMBRE: Sergio

APELLIDOS: Herce Navarro

FECHA: 25/02/2026

TEMA: 6

PRÁCTICA: 1

Sumario

1. Instala snort en Kali Linux.....3
2. Configúralo para que empiece a detectar todo el tráfico de la red de clase.....5
2. Configura para así detectar todo el tráfico que utiliza el puerto 80 y 443.....6
4. Configura estas reglas:.....6

1. Instala snort en Kali Linux

```
(kali@kali)-[~]
$ sudo apt install snort -y
Installing:
  snort

Installing dependencies:
  libdaq3      liblognorm5  snort-common
  libestr0     oinkmaster   snort-common-libraries
  libfastjson4 rsyslog      snort-rules-default

Suggested packages:
  rsyslog-doc      rsyslog-hiredis  | rsyslog-gnutls
  rsyslog-mysql    rsyslog-snmp     rsyslog-gssapi
  rsyslog-pgsql    rsyslog-kubernetes rsyslog-relp
  rsyslog-mongodb  rsyslog-docker   snort-doc
  rsyslog-elasticsearch rsyslog-clickhouse
  rsyslog-kafka    rsyslog-openssl

Summary:
  Upgrading: 0, Installing: 10, Removing: 0, Not Upgrading: 1628
  Download size: 4,116 kB
  Space needed: 17.9 MB / 63.1 GB available

0% [Connecting to http.kali.org]
```

Ponemos el siguiente comando para instalar snort.

```


Get:5 http://http.kali.org/kali kali-rolling/main amd64 libfastjson4 amd64 1.2304.0-2+b1 [29.1 kB]
Get:8 http://mirror.es.cdn-perfprod.com/kali kali-rolling/main amd64 libdaq3 amd64 3.0.24-0kali1 [56.1 kB]
Fetched 4,116 kB in 32s (129 kB/s)
Selecting previously unselected package snort-common-libraries.
(Reading database ... 422160 files and directories currently installed.)
Preparing to unpack .../0-snort-common-libraries_3.10.2.0-0kali1_amd64.deb ...
Unpacking snort-common-libraries (3.10.2.0-0kali1) ...
Selecting previously unselected package snort-rules-default.
Preparing to unpack .../1-snort-rules-default_3.10.2.0-0kali1_all.deb ...
Unpacking snort-rules-default (3.10.2.0-0kali1) ...
Selecting previously unselected package snort-common.
Preparing to unpack .../2-snort-common_3.10.2.0-0kali1_all.deb ...
Unpacking snort-common (3.10.2.0-0kali1) ...
Selecting previously unselected package libestr0:amd64.
Preparing to unpack .../3-libestr0_0.1.11-2+b1_amd64.deb ...
Unpacking libestr0:amd64 (0.1.11-2+b1) ...
Selecting previously unselected package libfastjson4:amd64.
Preparing to unpack .../4-libfastjson4_1.2304.0-2+b1_amd64.deb ...
Unpacking libfastjson4:amd64 (1.2304.0-2+b1) ...
Selecting previously unselected package liblognorm5:amd64.
Preparing to unpack .../5-liblognorm5_2.0.9-1_amd64.deb ...
Unpacking liblognorm5:amd64 (2.0.9-1) ...
Selecting previously unselected package rsyslog.
Preparing to unpack .../6-rsyslog_8.2512.0-3_amd64.deb ...
Unpacking rsyslog (8.2512.0-3) ...
Selecting previously unselected package libdaq3.
Preparing to unpack .../7-libdaq3_3.0.24-0kali1_amd64.deb ...
Unpacking libdaq3 (3.0.24-0kali1) ...
Selecting previously unselected package snort.
Preparing to unpack .../8-snort_3.10.2.0-0kali1_amd64.deb ...
Unpacking snort (3.10.2.0-0kali1) ...
Selecting previously unselected package oinkmaster.
Preparing to unpack .../9-oinkmaster_2.0-5_all.deb ...
Unpacking oinkmaster (2.0-5) ...
Setting up oinkmaster (2.0-5) ...
Setting up libestr0:amd64 (0.1.11-2+b1) ...
Setting up libfastjson4:amd64 (1.2304.0-2+b1) ...
Setting up snort-common (3.10.2.0-0kali1) ...
Setting up liblognorm5:amd64 (2.0.9-1) ...
Setting up libdaq3 (3.0.24-0kali1) ...
Setting up snort-rules-default (3.10.2.0-0kali1) ...
Setting up snort-common-libraries (3.10.2.0-0kali1) ...
Setting up rsyslog (8.2512.0-3) ...
Created symlink '/etc/systemd/system/syslog.service' → '/usr/lib/systemd/system/rsyslog.service'.
Created symlink '/etc/systemd/system/multi-user.target.wants/rsyslog.service' → '/usr/lib/systemd/system/rsyslog.service'.
Setting up snort (3.10.2.0-0kali1) ...
snort.service is a disabled or a static unit, not starting it.
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for kali-menu (2025.4.3) ...
Processing triggers for libc-bin (2.41-12) ...

(kali@kali)-[~]
$

```

Como vemos, ya se nos ha instalado.

2. Configúralo para que empiece a detectar todo el tráfico de la red de clase.

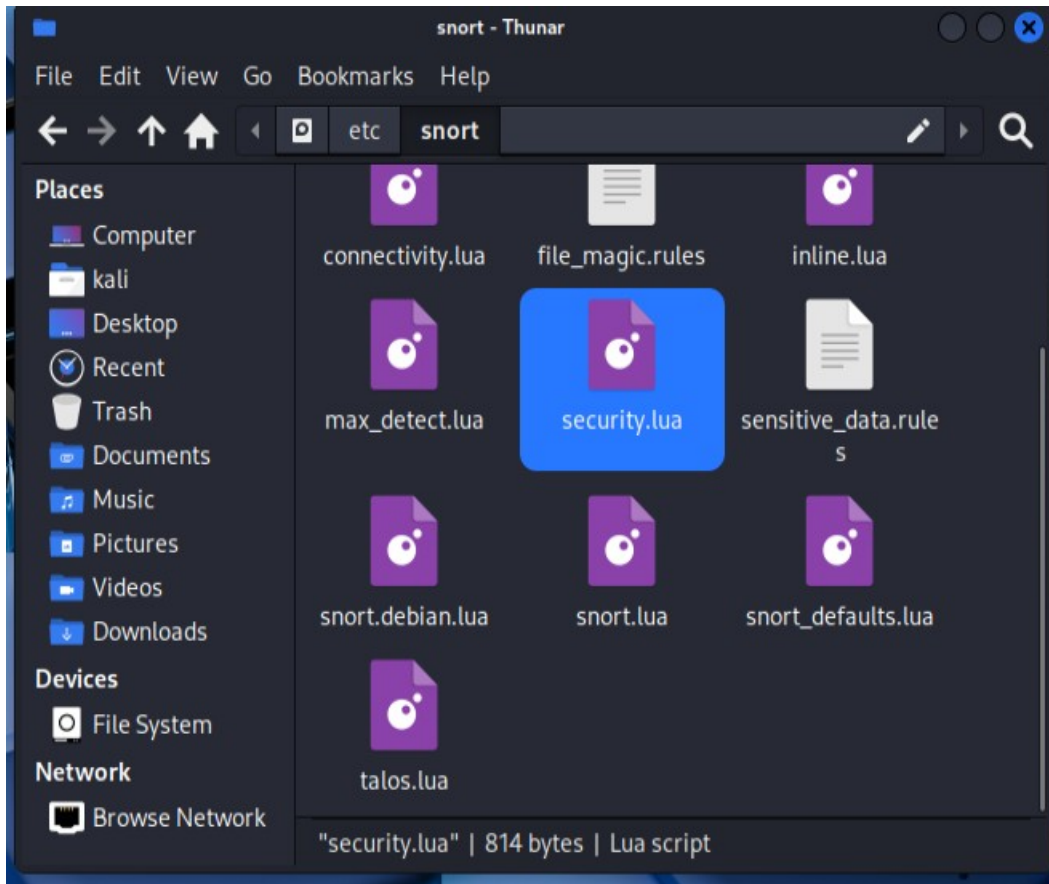

Entramos a snort.lua para poder configurarlo.

```
2 -- HOME_NET and EXTERNAL_NET must be set now
3 -- setup the network addresses you are protecting
4 HOME_NET = '192.168.100.100'
5
6 -- set up the external network addresses.
7 -- (leave as "any" in most situations)
8 EXTERNAL_NET = '!$HOME_NET'
9
10 include 'snort_defaults.lua'
```

Y cambiamos el HOME_NET y el EXTERNAL_NET.

2. Configura para así detectar todo el tráfico que utiliza el puerto 80 y 443

```
(kali@kali)-[~]
$ sudo snort -i eth0 -v --bpf "tcp port 80 or tcp port 443"

o")~   Snort++ 3.10.2.0

Network Policy : policy id 0 :
Inspection Policy : policy id 0 :
Snort BPF option: tcp port 80 or tcp port 443
pcap DAQ configured to passive.
host_cache
  memcap: 33554432 bytes
Commencing packet processing
Retry queue interval is: 200 ms
++ [0] eth0
DAQ instance (eth0) 0 daq pool size: 256
DAQ instance (eth0) 0 daq batch size: 64
```

Configuramos para detectar todo lo de los puertos.

4. Configura estas reglas:

Todo el tráfico por el puerto 443 que no sea la ip del router

```
alert tcp !192.168.100.63 any → $HOME_NET 443 (msg: "Puerto 443" ;sid :1000001;)
```

Todo el tráfico al router por los puertos 80, 443 o 22

```
alert tcp any any → 192.168.100.100 63,443,22 (msg: "puerto 80, 443, 22" ;sid :1000002;)
```

Todo los pings a la red salvo router y switch.

```
alert icmp !192.168.100.100,SWITCH any → $HOME_NET any (msg:"ping detectado en, no incluye router ni switch; sid:1000003;)
```

Todo tráfico udp dns

```
alert udp any any <> any 53(msg: "trafico UDP DNS" ;sid:1000004;)
```

Todo trafico vaya a facebook

```
alert tp any any <> any any (msg: "Acceso a Facebook ",content:"facebook.com" ;sid:1000005)
```