

предварительные требования:

- Setup Google Cloud SDK
- Start VM instance
- Pull docker container marcelmittelstaedt/hive base: latest
- Start docker container: docker run -dit --name hive_base_container -p 8088:8088 -p 9870:9870 -p 9864:9864 marcelmittelst aedt/hive base:latest
- Get into docker container
- Start Hadoop and Hive Shell:
 - -start-all.sh
 - hive

Exercise 1-4:

1. Download and unzip https://datasets.imdbws.com/name.basics.tsv.gz

```
wget https://datasets.imdbws.com/name.basics.tsv.gz
gunzip name.basics.tsv.gz
```

2. Create HDFS directory /user/hadoop/imdb/name_basics/ for file name.basics.tsv

```
hadoop fs -mkdir /user/hadoop/imdb/name_basics
```

3. Put TSV file to HDFS:

hadoop fs -put name.basics.tsv /user/hadoop/imdb/name_basics/name.basics.tsv

Exercise 1-4:

4. Create Hive Table name basics:

```
hive > CREATE EXTERNAL TABLE IF NOT EXISTS name_basics(
    nconst STRING,
    primary_name STRING,
    birth_year INT,
    death_year STRING,
    primary_profession STRING,
    known_for_titles STRING
    ) COMMENT 'IMDb Actors' ROW FORMAT DELIMITED FIELDS TERMINATED BY '\t' ST
ORED AS TEXTFILE LOCATION '/user/hadoop/imdb/name_basics'
TBLPROPERTIES ('skip.header.line.count'='1');
```

Exercise 5:

a) How many movies and how many TV series are within the IMDB dataset?

```
hive > SELECT m.title_type, count(*)
    FROM title_basics m GROUP BY m.title_type;

tvMovie 133177
movie 589792
tvEpisode 6107226
tvSeries 216132
[...]

Time taken: 32.908 seconds, Fetched: 12 row(s)
```


b) Who is the youngest actor/writer/... within the dataset?

```
hive > SELECT * FROM name_basics n
WHERE n.birth_year = ( SELECT MAX(birth_year) FROM name_basics);
```

Exercise 5:

b) Who is the youngest actor/writer/... within the dataset?

```
nm11495499 Therese Gotlib 2021 NULL producer, camera_department tt14643058 nm12442085 Mae Bair 2021 NULL tt0072506 nm12515594 Noah Lira 2021 NULL actor, cinematographer NULL nm12533998 Kenna Tota 2021 NULL tt4275008 nm12628453 Rio PenaVega 2021 NULL tt6412982 nm12641996 Lilibet Mountbatten-Windsor 2021 NULL tt0166442 nm12718283 Grace Warrior Irwin Powell 2021 NULL tt14955108, tt8994238, tt0165001 nm12746520 Legend Samuels 2021 NULL tt2224452 nm12919164 Cosmo Jost 2021 NULL NULL nm9786539 Doguhan Kabadayi 2021 NULL actor tt9873652, tt14858664, tt8309026 Time taken: 65.166 seconds, Fetched: 10 row(s)
```

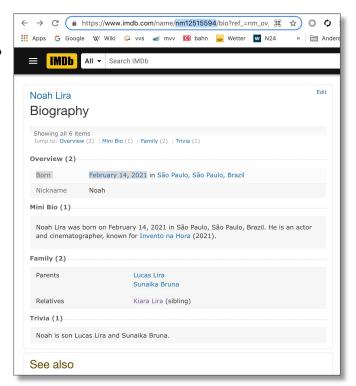

Exercise 5:

- c) Create a list (m.tconst, m.original_title, m.start_year, r.average_rating, r.num_votes) of movies which are:
 - equal or newer than year 2010
 - have an average rating equal or better than 8,1
 - have been voted more than 100.000 times

Exercise 5:

d) How many movies are in list of c)?

```
hive > SELECT count(*)
FROM title_basics m JOIN title_ratings r on (m.tconst = r.tconst)
WHERE r.average_rating >= 8.1 and m.start_year >= 2010 and m.title_type = 'movie'
and r.num_votes > 100000;
```

Exercise 5:

- e) We want to know which years have been great for cinema.
 - Create a list with one row per year and a related count of movies which:
 - have an average rating better than 8
 - have been voted more than 100.000 times ordered descending by count of movies.

```
hive > SELECT m.start_year, count(*)
FROM title_basics m JOIN title_ratings r on (m.tconst = r.tconst)
WHERE r.average_rating > 8 AND m.title_type = 'movie'
AND r.num_votes > 100000
GROUP BY m.start_year
ORDER BY count(*) DESC;

1995 8
2019 6
2009 6
2016 6
2004 6
2001 6
[...]
```

Exercise 5:

So 1995 seems to be a really good year for cinema, 8 really good movies have been releases, but which

are they?

```
hive > SELECT
            m.tconst, m.original title, m.start year, r.average rating,
            r.num votes
       FROM title basics m JOIN title ratings r ON (m.tconst = r.tconst)
       WHERE
            r.average rating > 8 AND m.title type = 'movie'
            AND r.num votes > 100000 AND m.start year = 1995
       ORDER BY r.average rating DESC;
```