Prior work and our recipient


Recipient: whoever gets released features, scores or decisions for an allowed task.

Study	What the recipient receives	Scope or question
LEACE	Erased features	Linear recovery from those features
FARE	A finite cell label	Any classifier using only that cell
Song & Shmatikov	Target features, labelled inputs and encoder queries	Sensitive-attribute inference
Our primary	One agreed view, plus labelled examples	Recovery from the delivered information

Our primary receives no target inputs, weights, gradients or repeated queries.
The benchmark supplies its labelled examples.

What the attacker receives


Illustrative service: a recipient gets an income prediction for an allowed task.

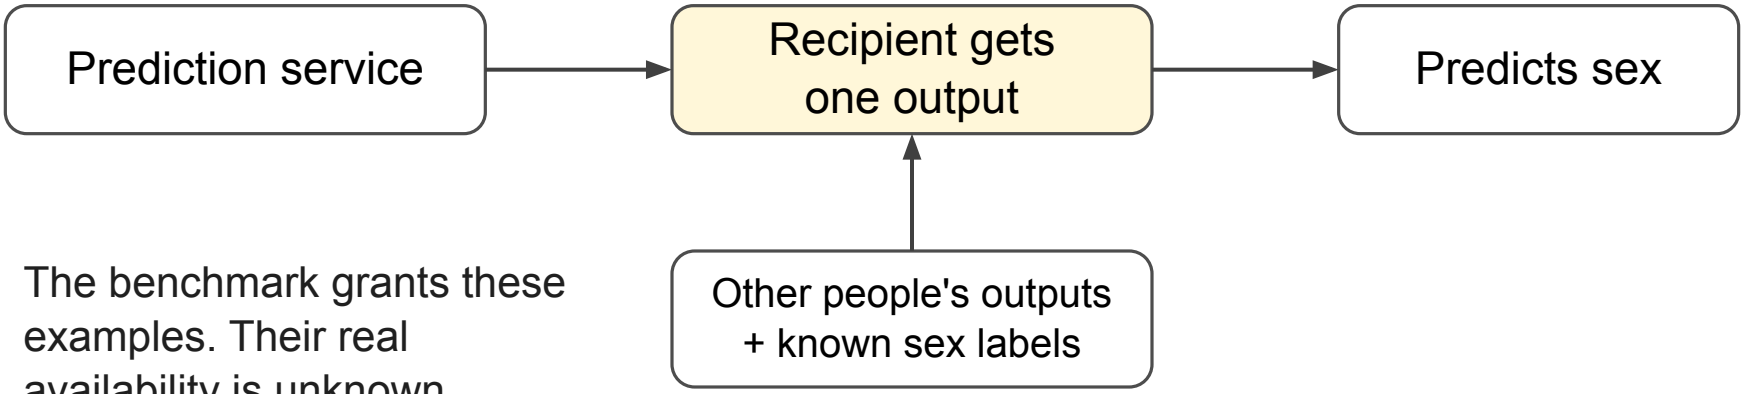

The benchmark grants these examples. Their real availability is unknown.

Do we agree that this recipient has these examples?
Which outputs does the permitted task need?


Appendix: how the attack is evaluated

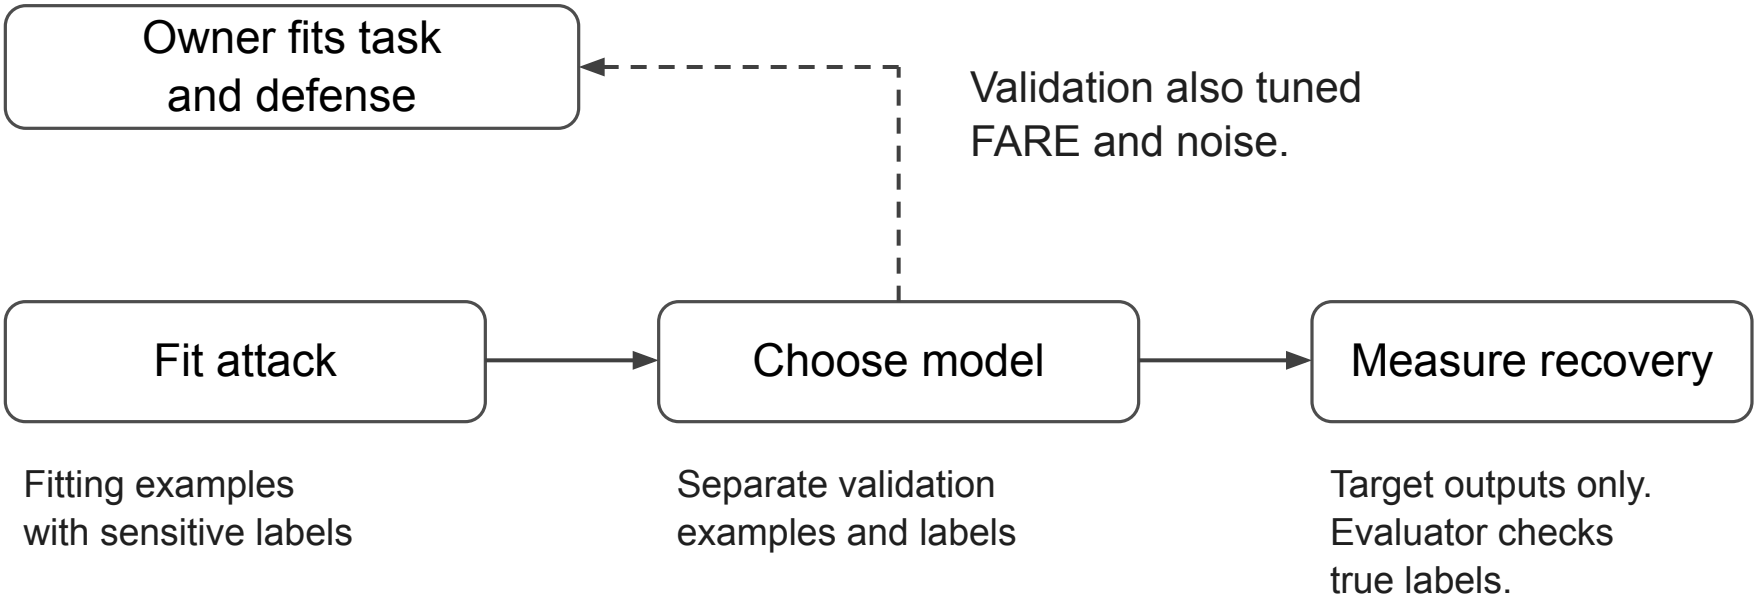

The scoring records were previously analysed.
Intervals describe the fitted models and attacks.

Appendix: recovery and task usefulness


Adult income/sex. Scores on the left, decisions on the right.

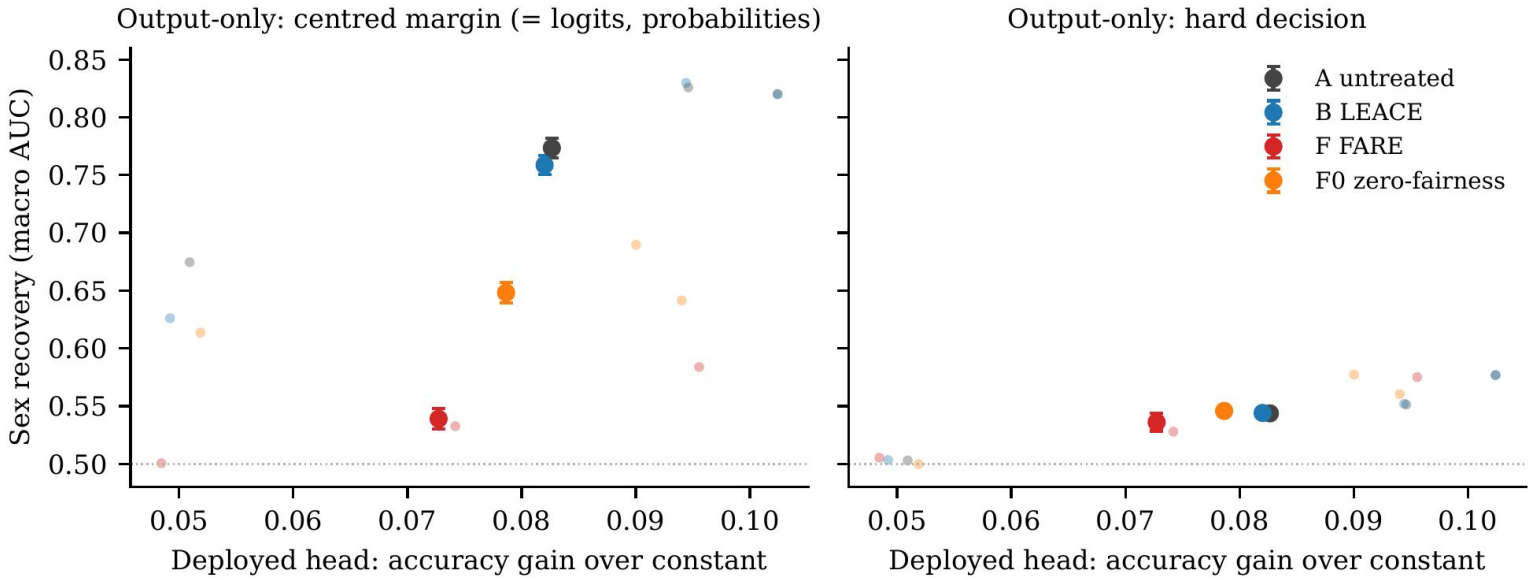

FARE's accuracy was not shown to stay within 1 percentage point of the untreated model.
Three encoder seeds. Bars show 90% intervals. The paper gives formal test intervals.

Appendix: output format and pooling

Left: one recipient. Right: two recipients with records matched exactly.

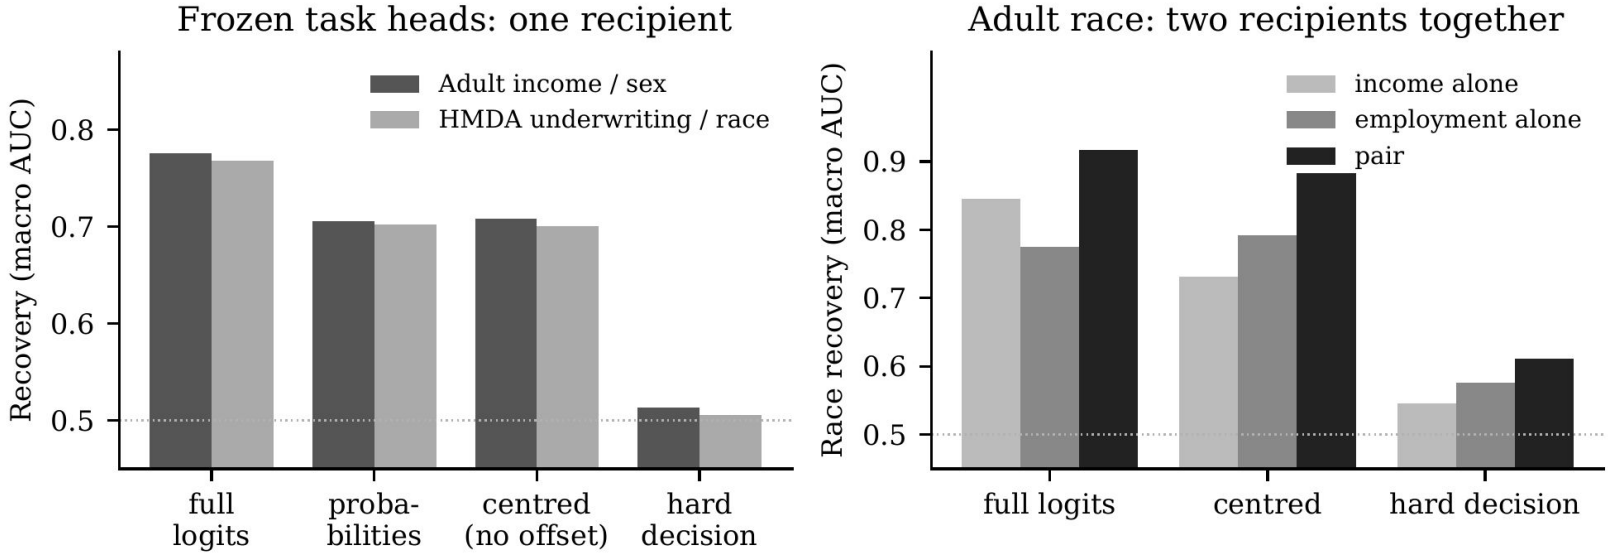

Bars average three encoder seeds. No intervals are shown. Axes start near 0.45.
The frozen decisions were weak predictors. This is one pair with perfect record matching.