

Software Verification

Bounded Box

Mattia Bottaro - Mauro Carlin
May, 2018



UNIVERSITÀ
DEGLI STUDI
DI PADOVA

1 Project

2 Our Contribution


3 Example

We have chosen the **Bounded Box Domain**, which is a parametric restriction of the interval abstract domain *Int*:

Given $m, n \in \mathbb{Z} \cup \{-\infty, +\infty\}$, then


$$\text{Int}_{m,n} := \{\emptyset, \mathbb{Z}\} \cup \{[k, k] \mid k \in \mathbb{Z}\} \cup \{[a, b] \mid a < b, [a, b] \subseteq [m, n]\} \cup \{(-\infty, k] \mid k \in [m, n]\} \cup \{[k, +\infty) \mid k \in [m, n]\}$$

Bounded Box with $m > n$

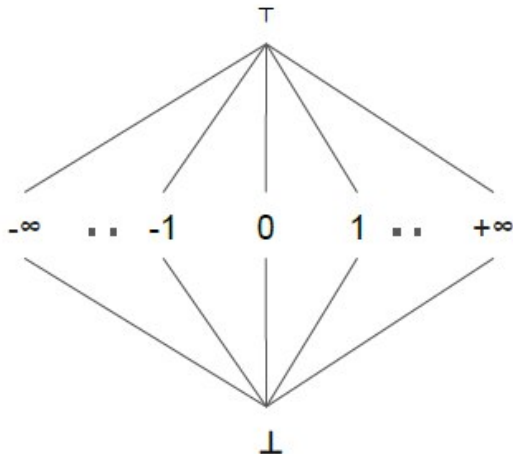

- Static Analyzer for **Numerical** Domains
- Jandom was created at the University of Chieti-Pescara
- It's a buildup of **RANDOM**, which analyzes **R** code
- Jandom is written in **Scala**
- Jandom analyzes JVM bytecode using **Soot**

We've extended Jandom from this repository created by University of Padua' students

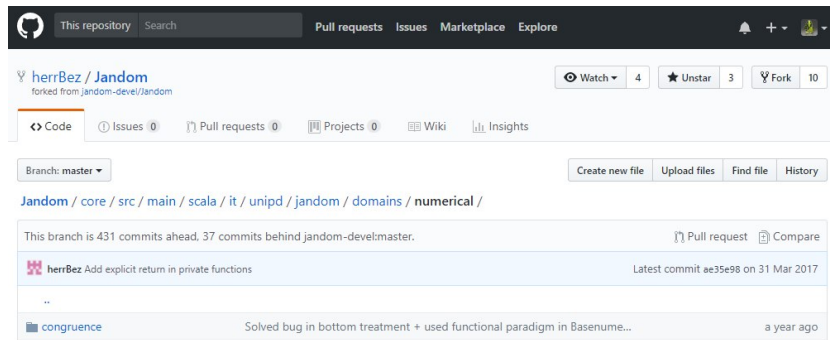

The screenshot shows the GitHub interface for the repository **herrBez / Jandom**, which is a fork of **jandom-devel/Jandom**. The repository has 4 watchers, 3 unstars, and 10 forks. The main branch is **master**. The commit history shows two recent commits: one by **herrBez** titled "Add explicit return in private functions" (latest commit `ae35e98` on 31 Mar 2017) and another by **congruence** titled "Solved bug in bottom treatment + used functional paradigm in Basenum..." (committed a year ago).

herrBez / Jandom
forked from jandom-devel/Jandom

Watch 4 Unstar 3 Fork 10

Code Issues 0 Pull requests 0 Projects 0 Wiki Insights

Branch: master

Create new file Upload files Find file History

Jandom / core / src / main / scala / it / unipd / jandom / domains / numerical /

This branch is 431 commits ahead, 37 commits behind jandom-devel:master. Pull request Compare

herrBez Add explicit return in private functions Latest commit `ae35e98` on 31 Mar 2017

congruence Solved bug in bottom treatment + used functional paradigm in Basenum... a year ago


1 Project

2 Our Contribution

3 Example

We have:

- 1 Implemented the Integer Interval Domain
- 2 Implemented Bounded Box Domain specializing the previous domain, because abstract operators of both domains are very similar



Abstract **sum** operator algorithm in Bounded Box Domain.

- 1 Execute sum operator of Interval Domain.

$$[a, b] +_b^{\#} [c, d] = [a + c, b + d] = [e, f]$$

- 2 $[e, f]$ must be represented as an element of Bounded Box Domain

$$[e, f] = \begin{cases} \top^{\#} & e < m \wedge f > n \\ [n, +\infty) & e \geq n \wedge e \neq f \\ [e, +\infty) & e < n \wedge f > n \\ (-\infty, m] & f \leq m \wedge e \neq f \\ (-\infty, f] & f > m \wedge e < m \\ [e, f] & \text{otherwise} \end{cases}$$

Abstract **reminder** operator algorithm in Box Domain

Definition

$$[a, b] \%_b^\# [c, d] = \begin{cases} \top^\# & [c, d] = \top^\# \\ \perp^\# & [a, b] = \perp^\# \vee [c, d] = \perp^\# \vee [c, d] = [0, 0] \\ [0, 0] & [a, b] = [0, 0] \\ [0, d - 1] & c \geq 0 \\ [c + 1, 0] & d \leq 0 \\ [c + 1, d - 1] & \text{otherwise} \end{cases}$$

We have defined a new type, called *Inflnt*, to:

- 1 model infinity values with Integer type
- 2 overload operations between integer number
- 3 simplify further contribution

Example

$$(+\infty) + n = +\infty$$

$$(+\infty) \times (-\infty) = -\infty$$

$$(+\infty) \div (+\infty) = 0$$

1 Project

2 Our Contribution

3 Example

```
public static void constantTest() {  
    int x = 0;  
    int y = -20;  
    int w = x + y;  
    if (w - x != -5) {  
        y = y * w;  
    } else {  
        w = x % y;  
    }  
}
```

(1)

```

| public static void constantTest()
| {
|     byte b0, b2;
|     int $i1, i3, i4, i5;
| /*[ [ b0 = T , $i1 = T , b2 = T , i3 = T , i4 = T , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     b0 = 0;
| /*[ [ b0 = [0,0] , $i1 = T , b2 = T , i3 = T , i4 = T , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     b2 = -20;
| /*[ [ b0 = [0,0] , $i1 = T , b2 = [-20,-20] , i3 = T , i4 = T , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     i3 = b0 + b2;
| /*[ [ b0 = [0,0] , $i1 = T , b2 = [-20,-20] , i3 = [-20,-20] , i4 = T , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     $i1 = i3 - b0;
| /*[ [ b0 = [0,0] , $i1 = [-20,-20] , b2 = [-20,-20] , i3 = [-20,-20] , i4 = T , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     if $i1 == -5 goto label1;
| /*[ [ b0 = [0,0] , $i1 = [-20,-20] , b2 = [-20,-20] , i3 = [-20,-20] , i4 = T , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     i4 = b2 * i3;
| /*[ [ b0 = [0,0] , $i1 = [-20,-20] , b2 = [-20,-20] , i3 = [-20,-20] , i4 = [400,400] , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     goto label2;
|     label1:
| /*[ [ empty ]types: byte,int,byte,int,int,int ]*/      Unreachable point
|     i5 = b0 % b2;
|     label2:
| /*[ [ b0 = [0,0] , $i1 = [-20,-20] , b2 = [-20,-20] , i3 = [-20,-20] , i4 = [400,400] , i5 = T ]types: byte,int,byte,int,int,int ]*/
|     return;
| }
| /* Output: [ b0 = [0,0] , $i1 = [-20,-20] , b2 = [-20,-20] , i3 = [-20,-20] , i4 = [400,400] , i5 = T ]types: byte,int,byte,int,int,int */

```

Second Example



```
public static void test1() {  
    int x = -5;  
    int y = 15;  
    while (x <= 5) {  
        y = x * y;  
        x++;  
    }  
    if (x >= 7) {  
        x = x - 10;  
    } else {  
        x = x + 10;  
    }  
}
```

(2)


```

public static void test1()
{
    int i0, i1, i2, i3;
    /*[ [ i0 = T , i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    i0 = -5;
    /*[ [ i0 = [-5,-5], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    i1 = 15;
    label1:
    /*[ [ i0 = [-5,6], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/ Loop Invariant
    if i0 > 5 goto label2;
    /*[ [ i0 = [-5,5], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    i1 = i0 * i1;
    /*[ [ i0 = [-5,5], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    i0 = i0 + 1;
    /*[ [ i0 = [-4,6], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    goto label1;
    label2:
    /*[ [ i0 = [5,6], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    if i0 < 7 goto label3;
    /*[ [ empty ]types: int,int,int,int ]*/
    i2 = i0 - 10; Unreachable point
    /*[ [ empty ]types: int,int,int,int ]*/
    goto label4;
    label3:
    /*[ [ i0 = [5,6], i1 = T , i2 = T , i3 = T ]types: int,int,int,int ]*/
    i3 = i0 + 10;
    label4:
    /*[ [ i0 = [5,6], i1 = T , i2 = T , i3 = [10,+∞] ]types: int,int,int,int ]*/
    return;
}
/* Output: [ i0 = [5,6], i1 = T , i2 = T , i3 = [10,+∞] ]types: int,int,int,int */

```

Jandom implements **subtraction** with the following steps:

- 1 Perform **Inverse** operator on the second operand
- 2 Perform **Add** operator

So, when $m \neq -n$ the following will happen:

Example with $m = 0, n = 10$

$[4, 5] -^\# [2, 3]$ is computed as $[4, 5] +^\# (-\infty, 0] = (-\infty, 5]$
instead of $[1, 3]$, that would be the best possible approximation