


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:20; looking down (along -Z)




FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

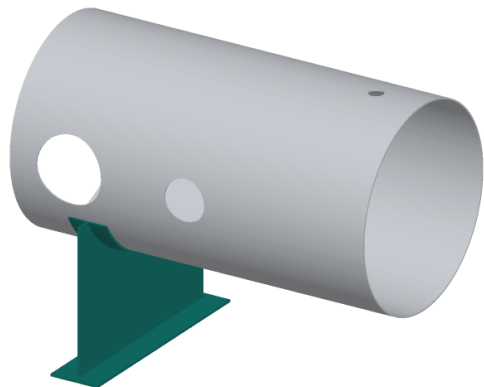

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Base: 200 x 900 plate, two 18 dia holes 40 from each end

Web: 840 wide x 597 high with a 833 dia curved cut in the top, centred, its centre 800 above the floor

Wear plate: 160 wide strip rolled to 813 inside dia over 120 deg

Weld web to base on its centre line, square, both sides

Weld the wear plate onto the web's curved top, centred

Set both saddles on a level floor 950 apart and lower the shell

in; the wear plates take the shell along their full arc

Fillet weld each wear plate to the shell along both edges

Check: shell axis level and 800 above the floor at both ends

ALTIRIG

github.com/BoujeeEnjinia1701/altirig

AltiRig saddle (make 2)

DRAWING NO. ALR-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 10 thick					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	