



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

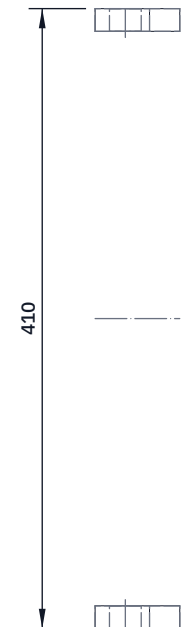


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

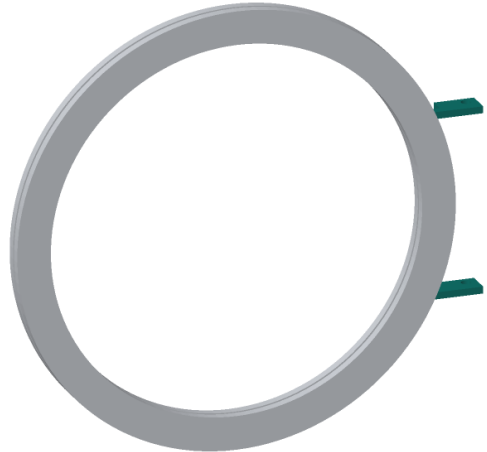

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut four lugs from 15 mm plate; drill each 21 dia for the pin

Two lugs on the shell ring at its far edge (+Y), 395 apart vertically, the upper one 190 above the axis

Two lugs on the door ring, each 2 mm above a shell-ring lug

Pin hole centres 16 in front of the shell ring face and 515 out from the axis; set them on one vertical line with a rod

Pin: 20 dia bar 450 long, head on top, collar under the lowest lug

Slot the door lugs' holes 3 mm toward the axis so the door can settle evenly on the gasket

Check: the door swings freely and closes square on the gasket

ALTIRIG

github.com/BoujeeEnjinia1701/altirig

AltiRig hinge lugs and pin

DRAWING NO. ALR-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 15 thick; 20 mm bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	