



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

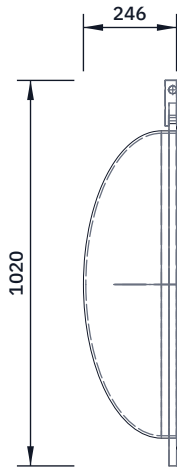


TOP VIEW

Scale 1:20; looking down (along -Z)

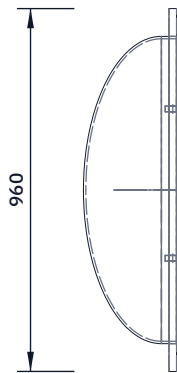


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

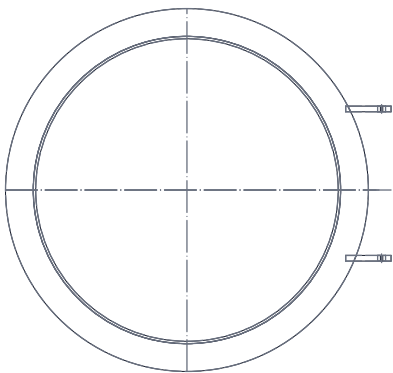

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

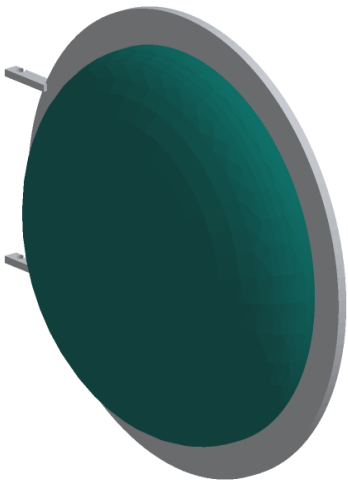

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- The door is the second tank head with the second flange ring
- Set the ring over the head's 40 mm skirt, face flush with the skirt's open end; check the face is flat within 1 mm
- Fillet weld ring to skirt both sides in short balanced runs
- Weld the two door lugs to the ring's edge (sheet 109)
- Grind the gasket face smooth where the welds meet it
- The door weighs about 72 kg; lift it with a hoist or two people
- Check: door face flat; no weld proud of the face

ALTIRIG

github.com/BoujeeEnjinia1701/altirig

AltiRig door: head welded into a flange ring

DRAWING NO. ALR-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Bought 813 OD 2:1 head, 6.35; door flange ring (sheet 102)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	