
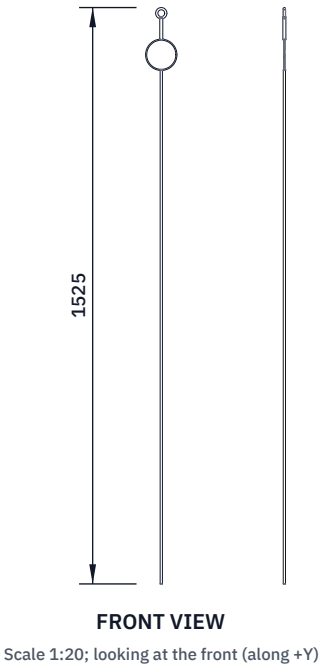


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Bridle 1,500 of 6 mm cord; bowline to the net's head and foot ropes
- Weak link: one loop of the chosen cord, 80 long, joining hook and bridle
- Choose the cord by pulling three samples: each must release at 500 to 700 N
- Snap hook clips to a swivel ring (far end) or the tie-off hole (near end)
- Make two; mark the weak link cord with paint so it is never swapped
- Check: the hook opens with one hand and snaps shut by itself

BANKHAUL			github.com/BoujeeEnjinia1701/bankhaul		
Net bridle with weak link: making sketch					
DRAWING NO. BKH-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6 mm polyester cord; braided weak link cord; 60 mm stainless snap hook					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		