



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Pull handle added (CLR-DEC-001)	2026-10-02	AC

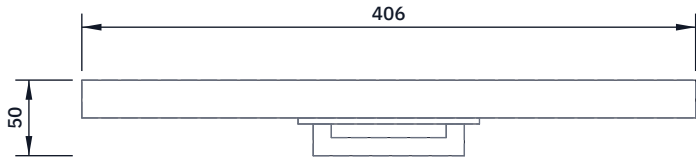

TOP VIEW

Scale 1:5; looking down (along -Z)

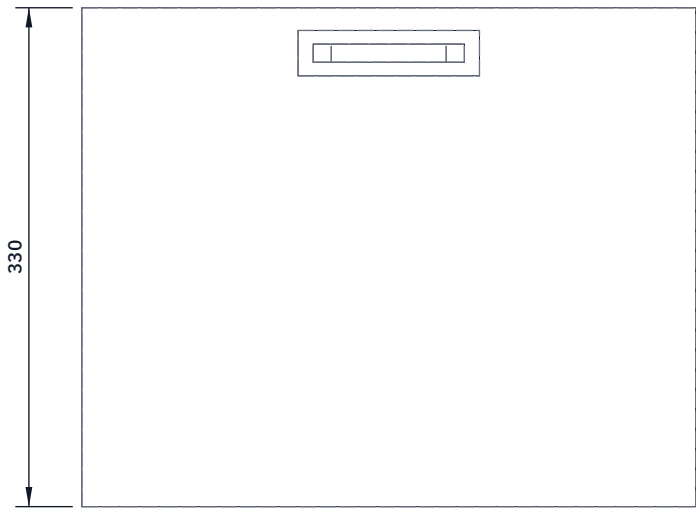


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

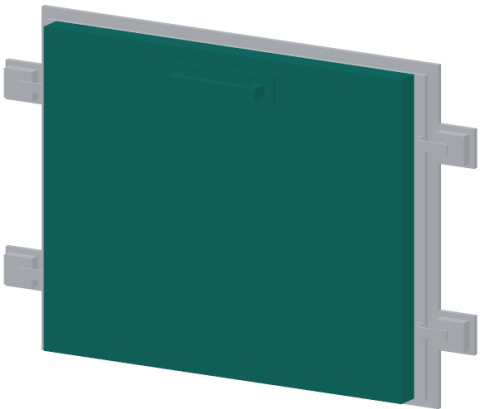

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 406 x 330 from 25 mm XPS. It covers the opening with 3 to spare each side and stays inside the latches.

Face the front with white self-adhesive vinyl so it lasts.

Handle: print in PETG a flange 120 x 30 x 4 with two 12 x 12 posts and a 100 long, 12 x 12 grip standing 25 out.

Glue the flange to the front with foam-safe adhesive, centred left to right, its centre 30 below the top edge.

Stick four hook-and-loop pads on its back, 30 in from each corner, and their mates on the door.

Fit: presses flat on the front of the door, 4 clear of the keepers and latch hooks. Fitted for the 40 C, 85 % point and for cold points; off for the others.

Check: it stays on with the rig running and peels off by hand with the pull handle; the handle does not move.

CalRig door panel and pull handle: making sketch

DRAWING NO. CLR-DWG-111			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Extruded polystyrene (XPS) board 25 mm; PETG handle, 3D printed					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand