


CONCEPT, NOT FOR FABRICATION


CellGuard · github.com/BoujeeEnjinia1701/cellguard

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-09-25	AC

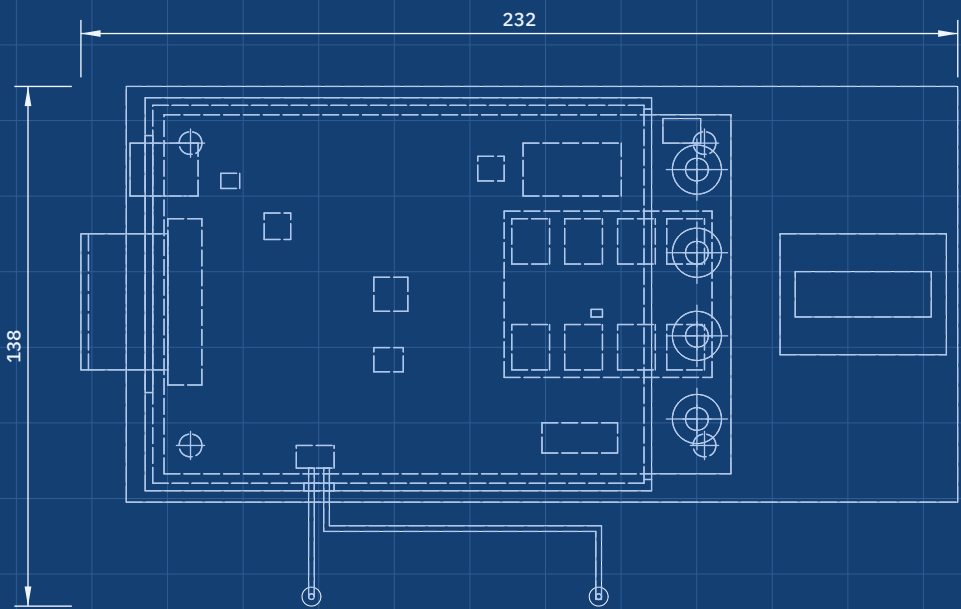


TOP VIEW

Scale 1:2; looking down (along -Z)

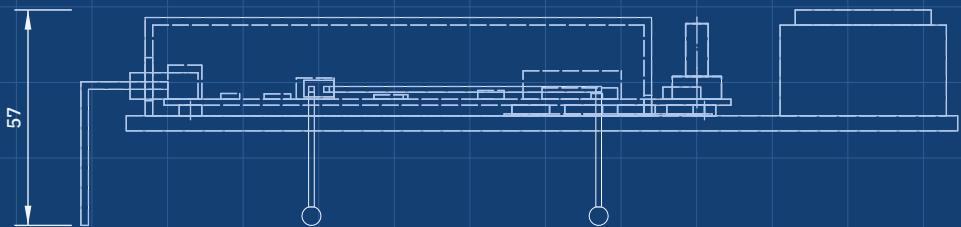


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

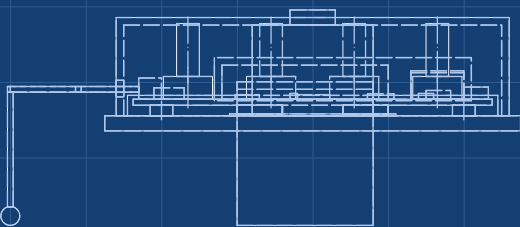

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

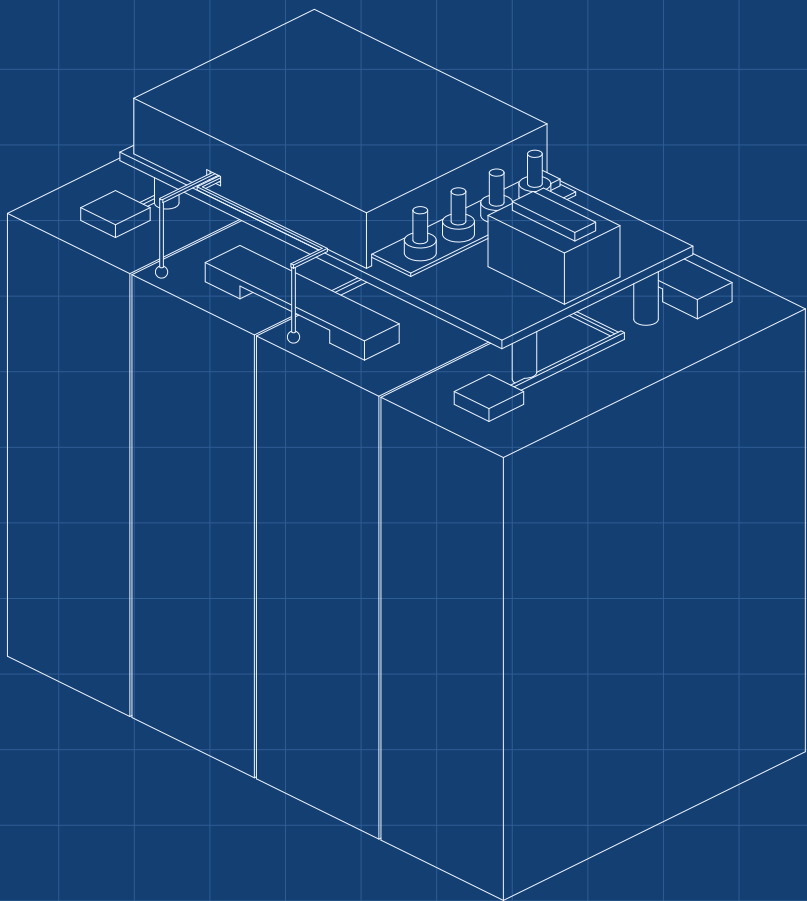

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

4 to 16 LiFePO4 cells in series (12.8 to 58.4 V)
40 A continuous, 80 A for 10 s; FET junction 54 °C (calc.)
Board loss 4.4 W at 40 A, R6 target 4 W (calc., not met)
Independent secondary protector and SCP fuse (R4)
CAN 2.0B 250 kbit/s, SwapCell v0.3 message set; UART
220 x 110 x 32 mm, 0.65 kg; \$134 in parts (est.)

CELLGUARD

github.com/BoujeeEnjinia1701/cellguard

Battery management board concept

DRAWING NO. CGD-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand