


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

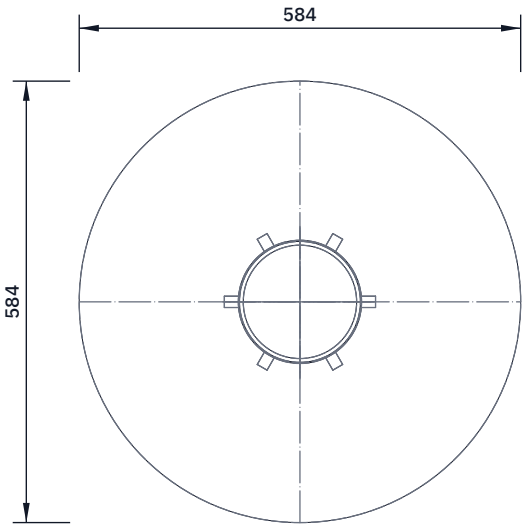


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

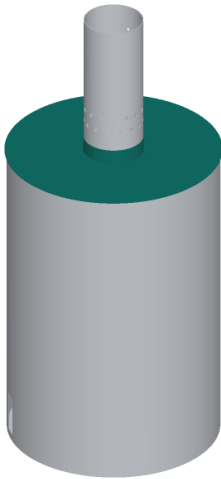

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lid: the outer drum's own lid. Cut a 150 mm hole in the middle (jigsaw with a metal blade, file to a scribed circle).

Collar: a strip of 1.5 mm sheet 40 mm wide plus six tabs 15 wide x 20 long along one edge. Roll it round a piece of the 160 mm throat pipe so it fits the pipe snugly, and rivet the overlap.

Fold the six tabs out flat. Stand the collar on the lid centred on the hole, drill through each tab and the lid 4.9 mm, rivet.

The throat stands on the 5 mm ring of lid inside the collar.

Glue ceramic gasket rope in the lid's rim channel with sealant.

Check: a 160 mm pipe slides into the collar by hand, with no gap wider than 1 mm, and sits flat on the lid.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube outer lid and throat collar: making sketch

DRAWING NO. CCB-DWG-105		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Drum lid (item 1); collar from 1.5 mm sheet				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	