



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 1:10; looking down (along -Z)

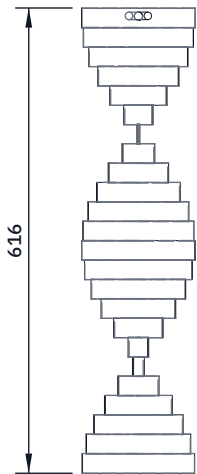


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

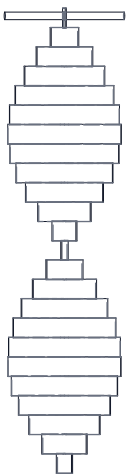

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

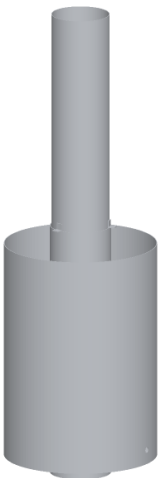

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Strip: 615 mm of 150 x 1.5 mm plain steel strip.
Drill an 11 mm hole on the centre line 10 mm from one end (the top).
Twist: clamp the top end in a vice and turn the bottom end with a long spanner on a clamped bar, half a turn per 300 mm: just over one full turn in all. Keep the edges straight.
Rod: 160 mm of 10 mm round bar; file the ends square.
Fit: hold the strip inside the flue foot, push the rod through one flue hole, the strip's hole and the other flue hole. The strip hangs 10 mm above the throat top with 3 mm clear of the sleeve; it lifts out with the flue.
Check: the twisted strip passes through a 160 mm ring.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube spiral baffle insert and hanger rod: making sketch

DRAWING NO. CCB-DWG-114			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Plain steel strip 150 x 1.5 mm; round bar 10 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	