



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (CCB-CAL-001)	2026-09-25	AC




TOP VIEW
Scale 1:30

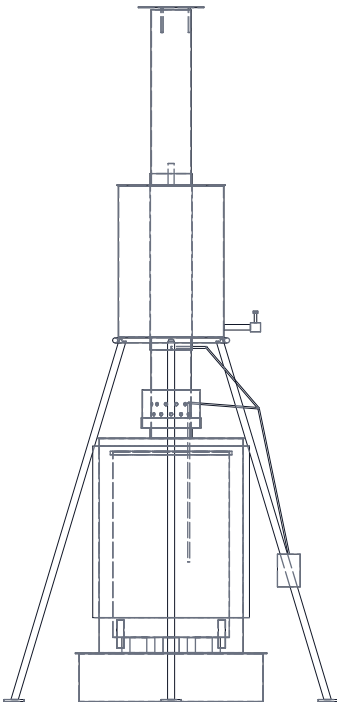

FRONT VIEW
Scale 1:30

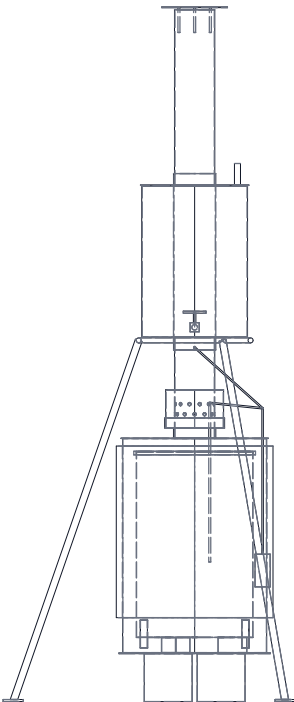

RIGHT VIEW
Scale 1:30

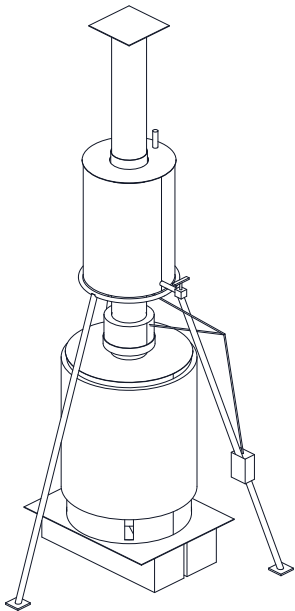

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS (MM) AND DATA

Overall 1327 x 1160 (tripod feet) x 2762 H to rain cap
Outer drum 572 dia x 851, 200 L; floor at 193 on plinth
Retort 463 dia x 737, 114 L, on 60 mm bricks; fill 600
8 x 20 gas holes in retort base, 300 PCD
4 primary ports 40 x 110 with dampers
Throat 160 x 2 x 400; 24 x 12 air holes, 2 rings
Air shroud 230 dia x 150, open bottom, band damper
Jacket 420 dia x 600, sleeve 168; 61 L at 540 deep
Jacket underside 1446; flue outlet 2696 above ground
Tripod feet on 1440 circle; 40 x 40 x 4 angle legs
Jacket OPEN-VENTED: never fit a sealed lid, valve or plug
Kiln about 91 kg dry; lift unit 43 kg, two people (CCB-CAL-001)
Not met at TRL 3: R5, R6, R8. See CCB-CAL-001
PRELIMINARY, NOT FOR FABRICATION

CHARCUBE

General arrangement, TRL 3 model

DRAWING NO. CCB-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:30	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Plain carbon steel drums, sheet and pipe; no galvanized parts. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	