



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

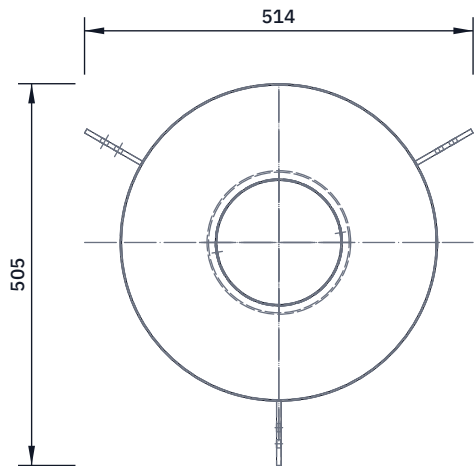


TOP VIEW

Scale 1:10; looking down (along -Z)

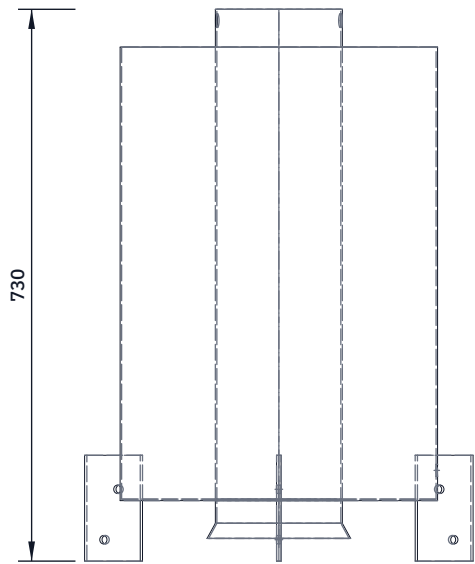

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

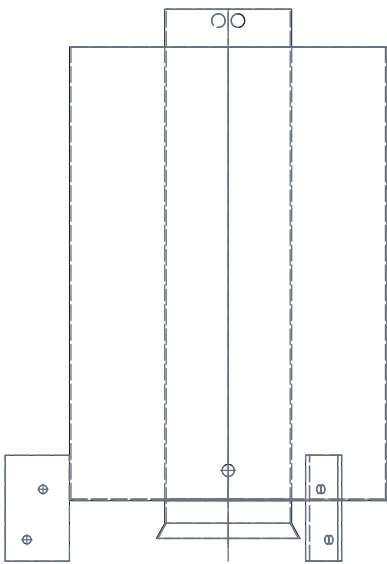

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

For a welder. Sleeve: 700 mm of 168 x 2 mm pipe. Shell: 2 mm sheet rolled to 420 mm outside, 600 mm tall. Bottom: 2 mm ring, 420 mm outside, 168 mm hole. Weld water-tight; the sleeve stands 50 mm out of the top and the bottom (the two sockets). Flare the bottom 20 mm of the sleeve to about 190 mm across (a cone) so it guides itself onto the throat. Two 18 mm holes across the top socket, 35 mm above the shell top, for the lift bar. The sleeve weld carries the whole unit when it is lifted: weld it all round. Fins: three 6 mm plates 85 x 140 mm, welded radially to the shell, one at the front, one back right, one back left (120 degrees apart), 60 mm up the shell and 80 mm below it. Two 11 mm holes per fin: 245 mm from the axis, 15 mm above the jacket's underside; 267 mm from the axis, 52 mm below it. Tap socket: 1/2 in socket welded 40 mm above the bottom, on the right side. Open top: no lid welded, nothing sealed. Leak test with water before painting. High-temperature paint outside. Check: holds water overnight; the sleeve slides over a 160 mm pipe.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube water jacket: fabrication sketch (the one welded part)

DRAWING NO. CCB-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 2 mm, pipe 168 x 2 mm, plate 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand