



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

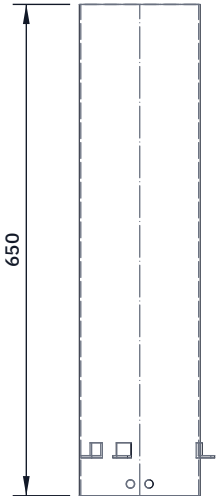


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

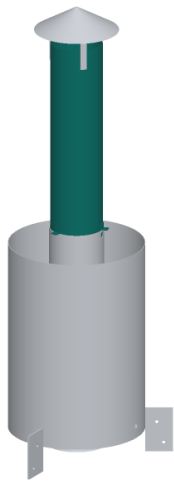

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 650 mm of 160 x 2 mm plain steel pipe; square the ends.

Rod holes: two 11 mm holes opposite each other, 15 mm above the bottom end (the foot).

Stop clips: three 20 mm lengths of 20 x 20 x 3 mm angle, each riveted (two 4.8 mm rivets) by its upright leg to the pipe, 120 degrees apart, with the flat leg's underside 50 mm above the foot.

Fit: the foot slides 50 mm into the jacket sleeve; the clips rest on the sleeve rim and carry the flue and the baffle.

Cap leg rivet holes: see CCB-DWG-113.

Check: drops into a 164 mm bore to the clips without forcing.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube flue pipe and stop clips: making sketch

DRAWING NO. CCB-DWG-112		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Plain steel pipe 160 x 2 mm; angle 20 x 20 x 3 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	