



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

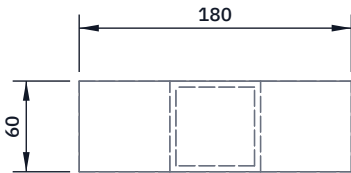

TOP VIEW

Scale 1:5; looking down (along -Z)

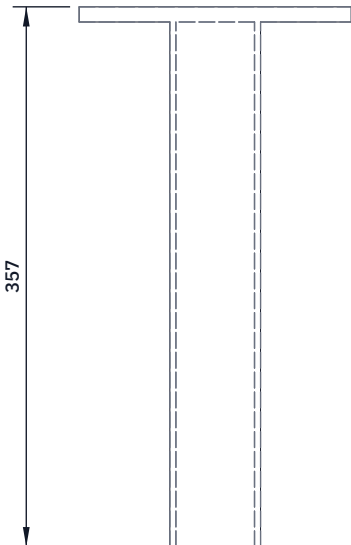


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

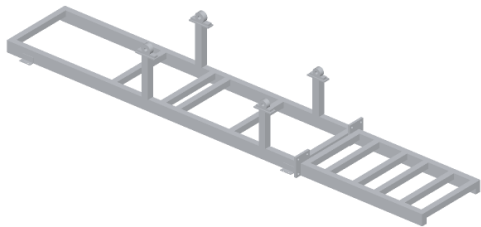

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Post SHS 60 x 60 x 4 with a 10 mm top plate 60 wide.
Pump wheel pedestals (2, drawn): post 347 mm, plate 180 x 60 mm; plate top 357 mm above the sill top.
Layshaft pedestals (2): post 304 mm, plate 160 x 60 mm; plate top 314 mm above the sill top.
Plate long way along the sill, centred on the post.
Holes in the plate: two, to suit the pillow block bought (about 127 mm centres for UCP206, 105 mm for UCP205); mark them from the bearing itself.
Weld each post square on the sill top, centred on the sill: pump pair 150 mm toward the pump end from the shaft centre, layshaft pair 950 mm toward the drive end.
Check: a straight edge across each pair of plates; tops level and in line within 1 mm.

COLLARDRIVE

github.com/BoujeeEnjinia1701/collardrive

CollarDrive bearing pedestal: making sketch

DRAWING NO. CLD-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES SHS 60 x 60 x 4 and 10 mm plate, S275; make 4					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	