



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

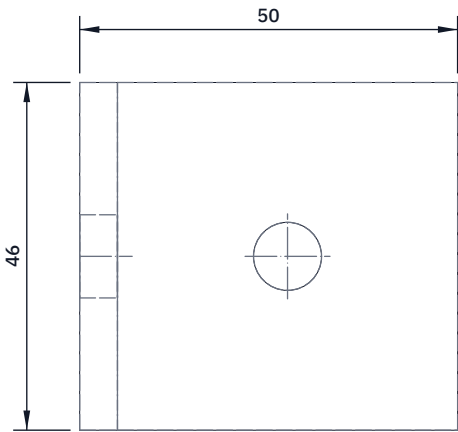


TOP VIEW

Scale 1:1; looking down (along -Z)

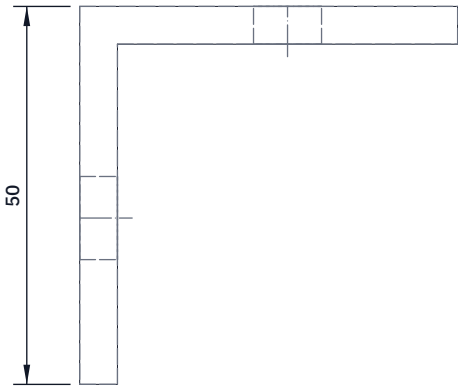


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

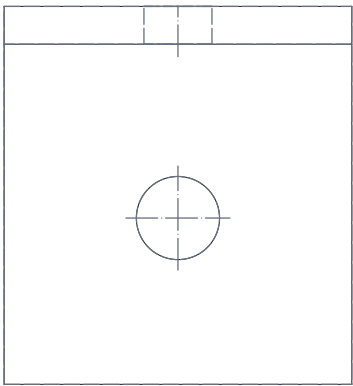

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

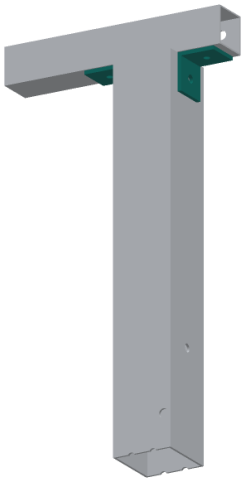

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make eight. Cut 46 mm lengths of 50 x 50 x 5 angle; deburr.

Upright leg (goes on the post): one 11 mm hole on the middle of the length, 28 mm below the top face of the flat leg.

Flat leg (goes under the beam): one 9 mm hole on the middle of the length, 27.5 mm out from the back of the upright leg.

Fit: one cleat on each side face of the post top, the flat leg's top face flush with the post's square-cut top, pointing away from the post. One M10 bolt through both cleats and the post; one M8 bolt up through each flat leg into a rivet nut in the beam's underside.

Check: a straight edge across the post top touches both cleats.

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

CoolShade head cleat (make 8): making sketch

DRAWING NO. CSH-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized equal angle 50 x 50 x 5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand