
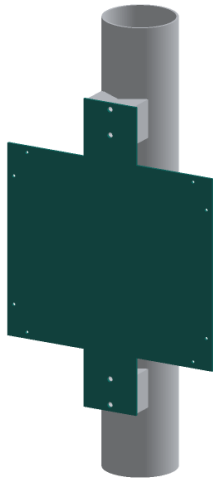
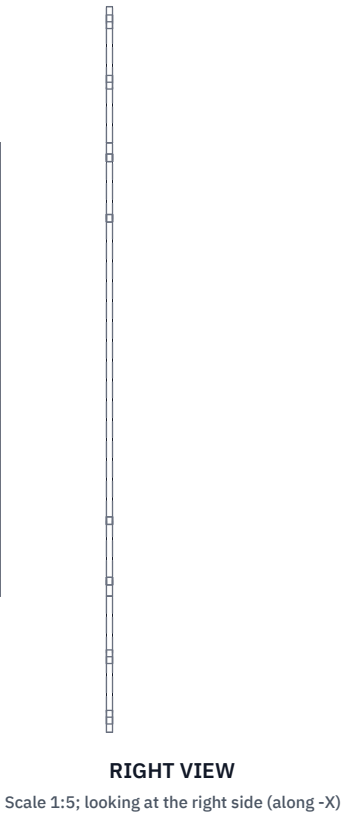
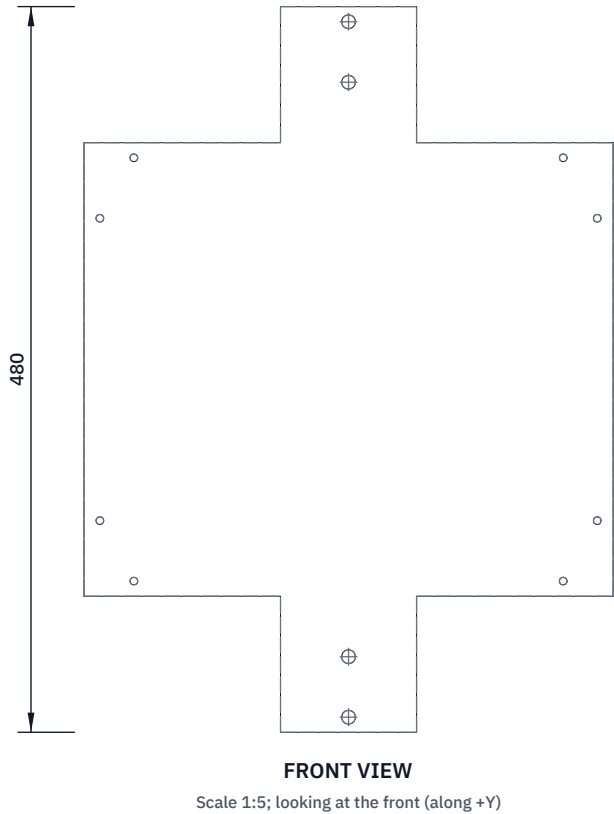


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

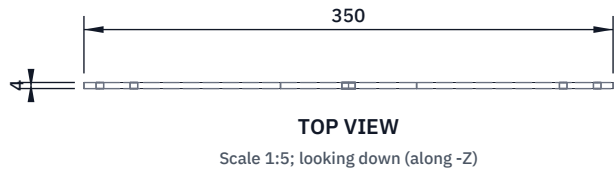

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 350 x 300 mm with a 90 x 90 mm tab centred above and below:
480 mm tall overall. Round the outside corners to about 5 mm.

Heights from the bottom edge of the lower tab; sideways from the centre line. The plate-holes picture repeats every position.

Saddle bolts: four 9 mm holes on the centre line, 10 and 50 mm up, and 430 and 470 mm up (one pair in each tab).

Lug screws: four 5.5 mm holes 142 mm each side, 100 and 380 mm up.

Shield screws: drill 4.2 mm and tap M5, 164.5 mm each side, 140 and 340 mm up.

Fit: the back face bolts flat on two saddles with four M8 bolts from the front; the enclosure hangs on its front by the four lugs.

Check: lay a saddle on each tab and look through the holes.

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

CrossSafe enclosure mounting plate: making sketch

DRAWING NO. CRS-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium sheet 4 mm, 5052 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	