



CONCEPT, NOT FOR FABRICATION
PRELIMINARY, NOT FOR FABRICATION

FieldNode · github.com/BoujeeEnjinia1701/fieldnode

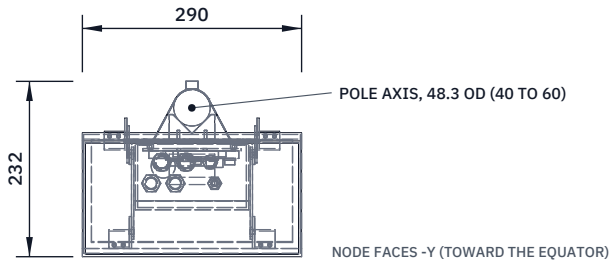

TOP VIEW

Scale 1:10; looking down (along -Z)

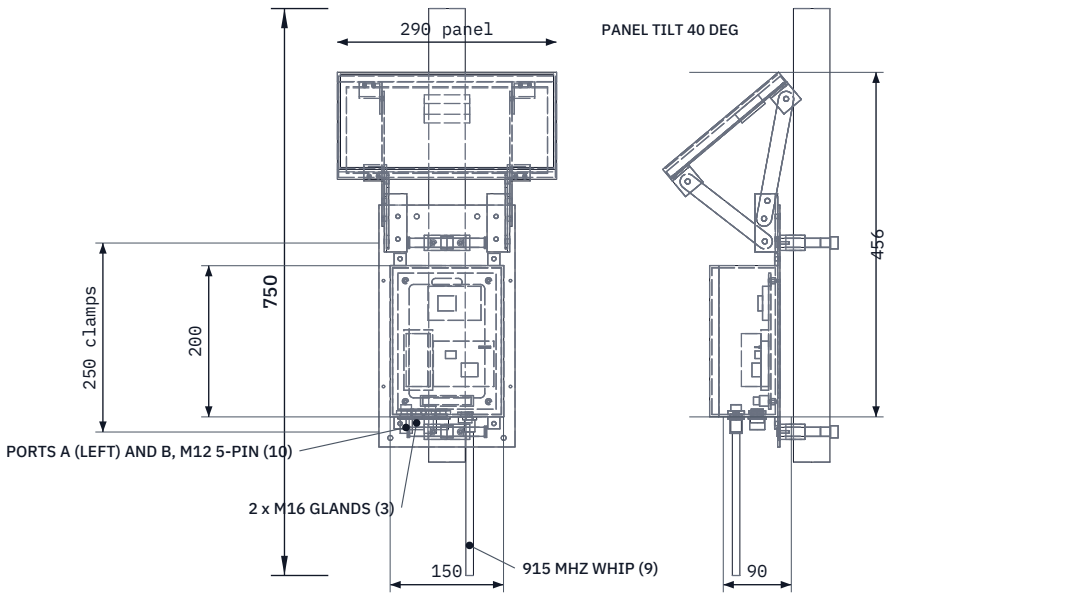


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

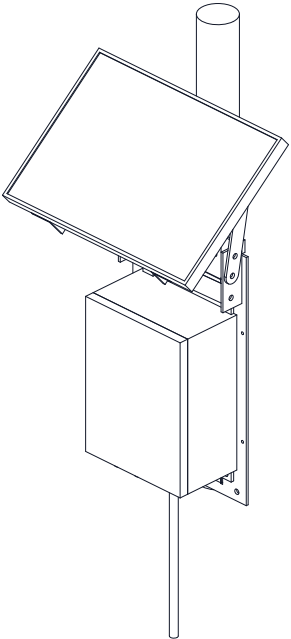

ISOMETRIC VIEW

Not to scale; grey pole stub is site supplied; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Enclosure IP65 150 x 90 x 200 (W x D x H); base 1,750 above ground
Panel 6 W 9 V class, 290 x 200, tilt 40 deg; top 2,206 above ground
Panel overhangs lid by 57; front edge 121 above enclosure
Back plate 180 x 320 x 3 Al; V-blocks 60 x 33 x 20, 90 deg V
Band clamps 12 wide, 250 apart; poles 40 to 60 OD
Bracket bar 20 x 3: posts 161, struts 129 between holes
Enclosure on 4 lugs, M5; bracket on 30 x 30 x 3 angle clips, M6
Bottom face: 2 rows, 27 and 55 in from the back face
Whip 915 MHz (US915), 190 long; tip 1,540 above ground
Option (14), not shown: shield 181 x 106 x 206, 15 gap, 4 thumb screws
Ports A and B (10), M12 5-pin A-coded, pin positions per maker:
1 switched rail, 2 data A, 3 ground, 4 data B, 5 analog
Serial header (7) on the power board, pins 48 in from box front (lid off)
Third-angle; front view from -Y; pole on Z axis; (n) = BOM line

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

General arrangement

DRAWING NO.

FND-DWG-001

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Bought-in parts per bom/bom.csv; aluminium bracket and plate. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand