




CONCEPT, NOT FOR FABRICATION

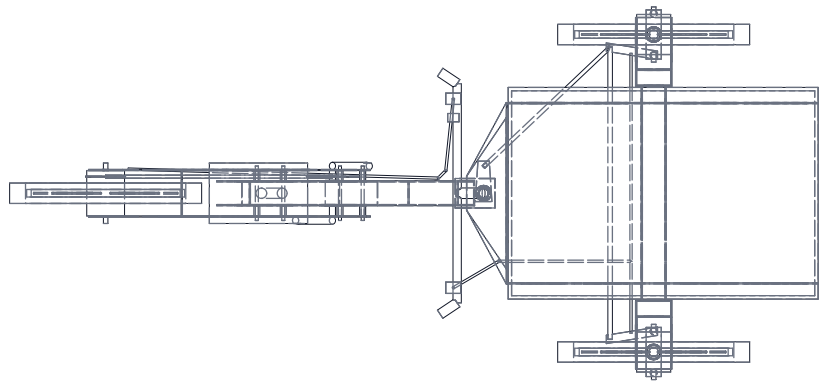


TOP VIEW
Scale 1:20

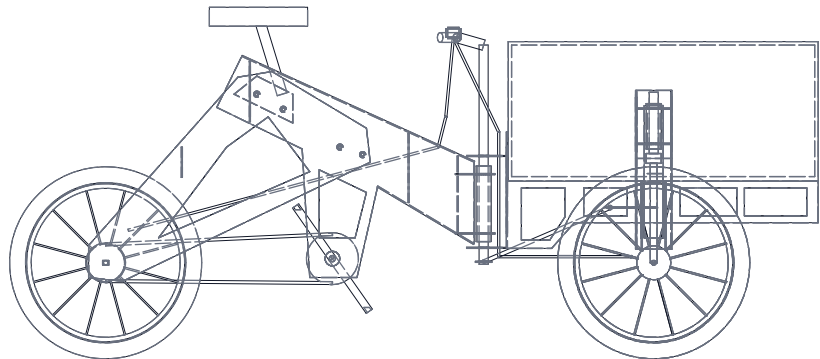

FRONT VIEW
Scale 1:20

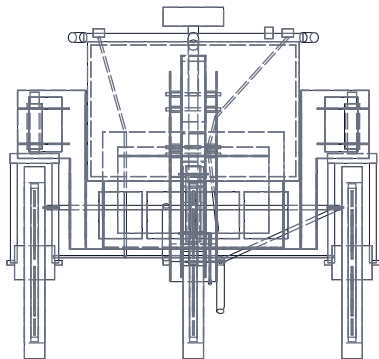

RIGHT VIEW
Scale 1:20

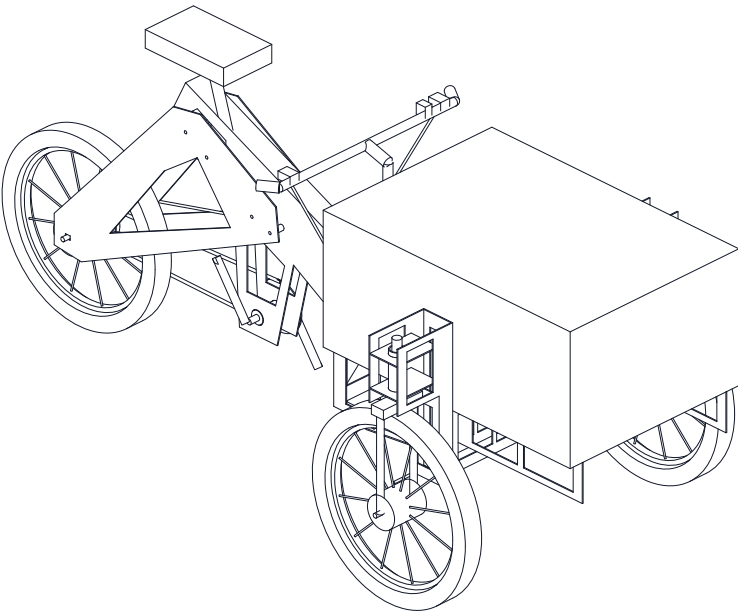

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS (MM) AND DATA

Overall 2139 L x 986 W x 930 H (saddle top)
Wheelbase 1450; front track 840; wheels 20 in (ISO 406)
Steering column 1000 ahead of rear axle; head tube 200 long
Bottom bracket 600 ahead, 265 high; seat angle 73 deg
Saddle top 930 high, 404 ahead of rear axle
Spine box 63 wide x 150 to 215 deep; stays 120 apart (hub OLD)
Chain line 44; 32T / 24T; cranks 170
Box 820 x 560 x 360; lid 839 high
34 plates, 1.25 m2 net, t = 3; one 1250 x 2500 sheet
Ackermann steering, fixed box; inner lock 40 deg; turning circle 5.95 m
Knuckle head tubes 120 long on the wheel centre lines; 20 in forks
Empty 69.8 kg; gross 299.8 kg (FTK-CAL-001 v0.2)
Frame not verified: R2 at risk; see FTK-CAL-001
PRELIMINARY, NOT FOR FABRICATION

FLATTRIKE

General arrangement, TRL 3 model

DRAWING NO.

FTK-DWG-001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

3 mm S235JR or A36 plate, painted; M8 8.8 bolts, all-metal locknuts. See bom/bom.csv