
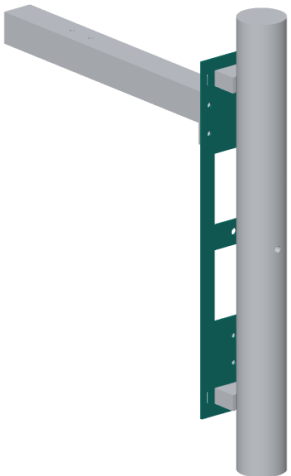
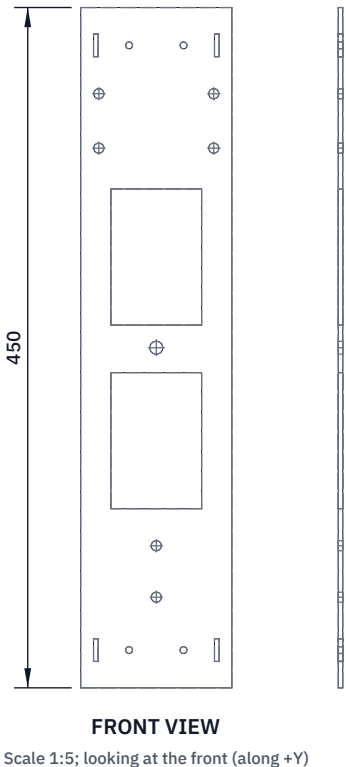


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 100 x 450 mm, 3 mm aluminium. Front view is the face toward the road.
Heights up from the bottom edge; sideways from the centre line.
Band slots 3 x 15 mm at 40 mm each side, centred 25 and 425 mm up:
chain drill 3 mm and file square. The band clamps pass through these.
V-block screws 4.5 mm at 18 mm each side, 25 and 425 mm up; countersink
from the front so the M4 heads sit flush under the band.
Brace clip bolts 6.6 mm on the centre line, 60 and 94 mm up.
Through-bolt hole 8.5 mm on the centre line, 225 mm up.
Arm cleat bolts 6.6 mm at 38 mm each side, 357 and 393 mm up.
Two windows 60 x 90 mm, centred 164 and 285 mm up (saves weight):
drill 10 mm in the corners, cut between with a jigsaw, file straight.
Deburr every hole and edge; round the corners to about 2 mm.
Check: lay the V-blocks, cleats and clip on it; every hole lines up.

FLOODGAUGE

github.com/BoujeeEnjinia1701/floodgauge

FloodGauge pole bracket plate: making sketch

DRAWING NO. FLG-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand