REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

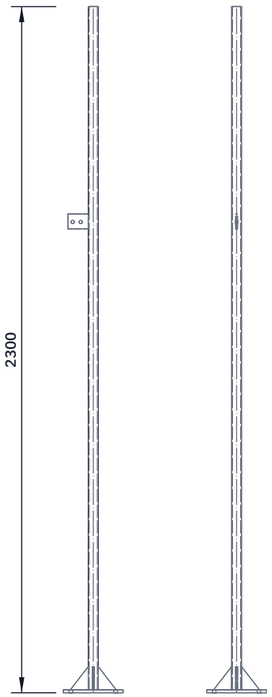

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

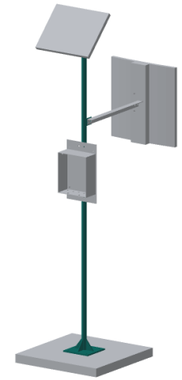

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Pipe: DN25 (1 in) galvanized, 33.7 x 3.2 mm, cut square to 2,290 mm.
Base plate: 200 x 200 x 10 mm steel; four 12 mm holes on a 150 mm square (75 mm each way from the centre) for M10 anchors.
Gussets: four 6 mm plates, triangles 60 mm along the plate and 78 mm up the pipe face, one on each side, in line with the plate edges.
Stay lug: 6 mm plate 68 x 50 mm from the pipe face, on the bin side, centred 1,580 mm above the underside of the base plate, square to the wall; two 11 mm holes 42 and 69 mm from the pipe axis, 2 mm below its middle.
Grind the zinc off 25 mm round every weld first; weld in open air.
Fillet weld the pipe all round to the plate centre, gussets and lug both sides. Paint the welds and the plate with zinc-rich paint.
Fit: four M10 anchors into the pad; stay to the lug; clamps on the pipe.
Check: the pipe stands square to the plate within 1 mm per 300 mm.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard mast weldment: making sketch

DRAWING NO.	REV	SHEET	SIZE
GGD-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

DN25 galvanized pipe 33.7 x 3.2 mm; steel plate 10 and 6 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand