



CONCEPT, NOT FOR FABRICATION

HelioLite · github.com/BoujeeEnjinia1701/heliolite

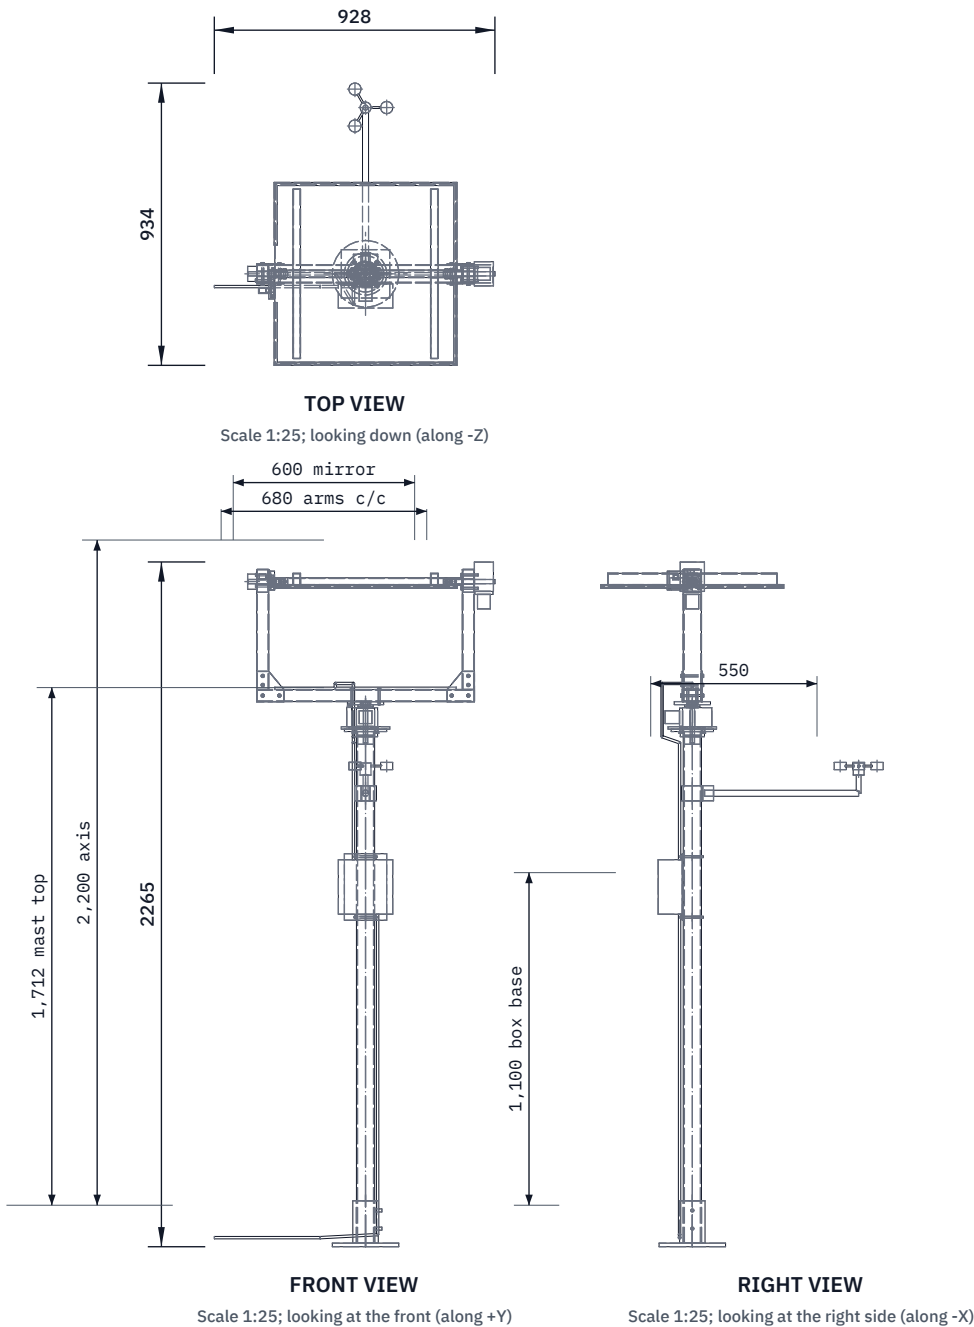

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	Stow stop and latch, preload springs added (DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC
P4	Design for construction (DDR-003): tube yoke, fixings	2026-10-01	AC
P5	Decisions of 2026-10-02: alu. latch bracket, EPDM edge channel	2026-10-02	AC

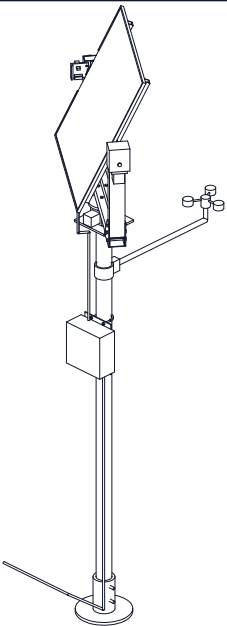

ISOMETRIC VIEW, TRACKING POSE

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Mirror 600 x 600 x 3 glass on 4 ACP, EPDM edge channel; sweep radius 301
Elevation axis at Z 2,200; 25 sq. torque tube, 14 trunnions
Yoke: 40 x 60 x 2 alu. tube arms at X +/-340; gaps 20 (arm), 56 (crossbar)
Drives: NEMA17 on NMRV030-class 50:1, envelope 80 x 97 x 63, 14 bore
Mast 60.3 x 3.9 galv. pipe, 1,700 long; floor flange; cap 160 sq. x 8
Anchor flange 220 dia.; ground screw 76 x 800 (not shown)
Anemometer at Z 1,500, reach 550; controller box at Z 1,100
Stow lug 8 thk at X -307; pad and pawl at R 55 on a 6 alu. bracket, -X arm
Preload spring cans 50 dia.: -X trunnion and mast top
Top mass about 12.99 kg, fitted in two lifts; stow face-down in 23 s (HLT-CAL-001)
Orthographic views stowed at azimuth 0; front from -Y, right from +X

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

General arrangement

DRAWING NO. HLT-DWG-001			REV P5	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Glass mirror on ACP; aluminum tube yoke; NMRV030-class drives; 60.3 mm galv. pipe. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	