BUILD PLAN SKETCH, PLAN NOT YET BUILT

KilnDeck · github.com/BoujeeEnjinia1701/kilndeck

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

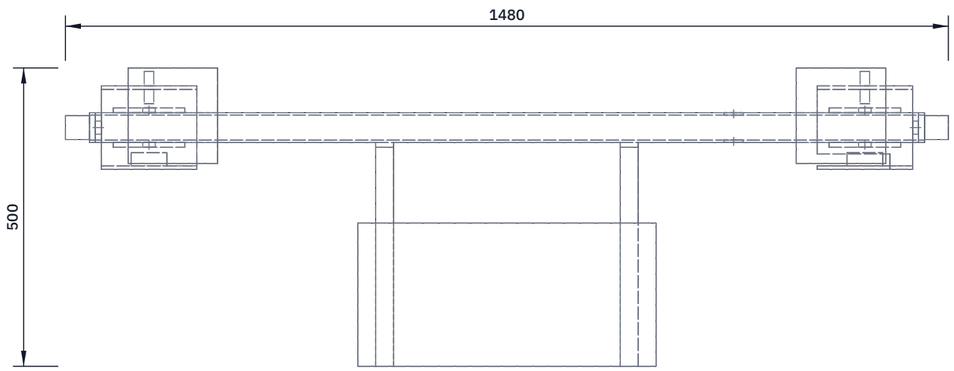

TOP VIEW

Scale 1:10; looking down (along -Z)

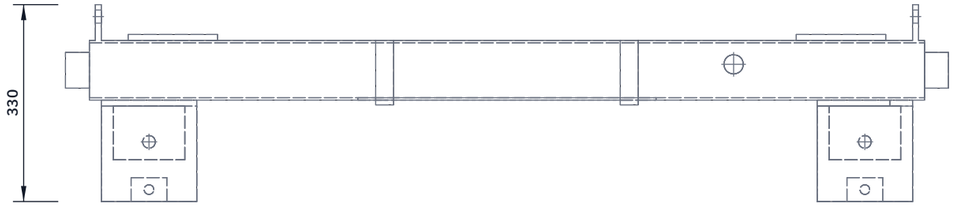

FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

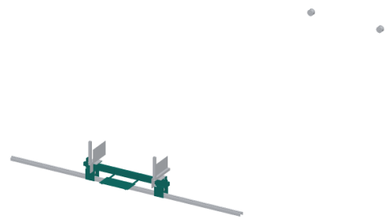

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Beam: RHS 100 x 50 x 4 mm, 1,400 mm long, the 100 mm side upright.
Fork plates: 8 mm, 120 x 100 mm, two per wheel, 600 mm each side of the middle, hanging under the beam, 3 mm clear of each wheel face; 21 mm axle holes 70 mm below the beam. Inner truck: forks 70 mm apart for the wide-groove wheels; outer truck: 50 mm apart.
Seats: 10 mm plate 150 x 160 mm on top, 560 mm each side of the middle, four 14 mm holes outside the beam for the truss feet.
Derailment guards: 6 mm plate 160 x 160 mm either side of the track, 24 mm clear of the channel, bottom edge 30 mm above the wall top.
Shaft hole: 32 mm through both walls, 380 mm right of the middle, 60 mm up from the beam bottom. Rubber buffers on both ends.
Outer truck only: 500 x 240 x 4 mm chequer step on two brackets.
Check: the four axle holes lie square and level within 1 mm.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

KilnDeck end truck (make 2; the outer one with the step): making sketch

DRAWING NO.	REV	SHEET	SIZE
KND-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

RHS 100 x 50 x 4 mm; 8, 10 and 6 mm plate; 4 mm chequer plate; S275

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand