


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWR-DDR-004: 156 wide, antenna holes	2026-10-04	AC

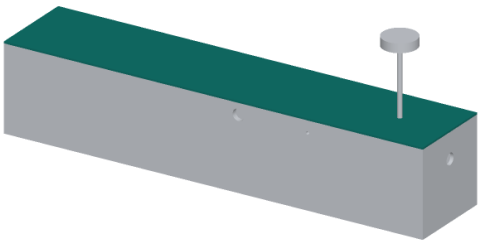

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Plate 750 x 156 x 3; sits on the side walls and bulkheads.
- Glue a 20 mm tongue under the front edge that slides under a lip on the firewall.
- One M4 nylon thumb screw at the back into a captive nut on the rear wall.
- 8.5 mm hole for the GNSS mast, 660 back from the front edge, on the centre line; the Core's GNSS receiver sits on top.
- Three 6.5 mm holes beside the mast for the Core's antennas on SMA extension leads.
- Cut a slot for the lockable arming switch next to the mast (see the harness plan).



TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

Kitewright Range: hatch making sketch

DRAWING NO. KWR-DWG-102			REV P2		SHEET 1 of 1		SIZE ANSI B	
SCALE 1:5		UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 3 mm poplar lite-ply								
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								
Generated from cad/src; do not edit by hand								