



CONCEPT, NOT FOR FABRICATION

LevelHull · github.com/BoujeeEnjinia1701/levelhull

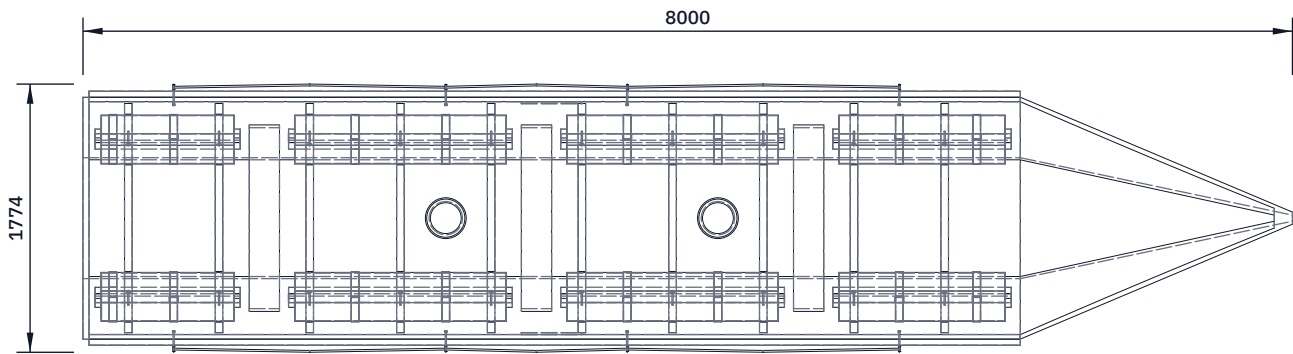


TOP VIEW

Scale 1:50; looking down (along -Z)

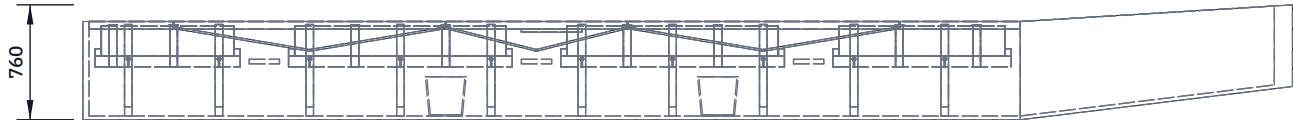

FRONT VIEW


Scale 1:50; looking at the front (along +Y)



RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	LVH-DDR-002: design for construction	2026-10-03	AC

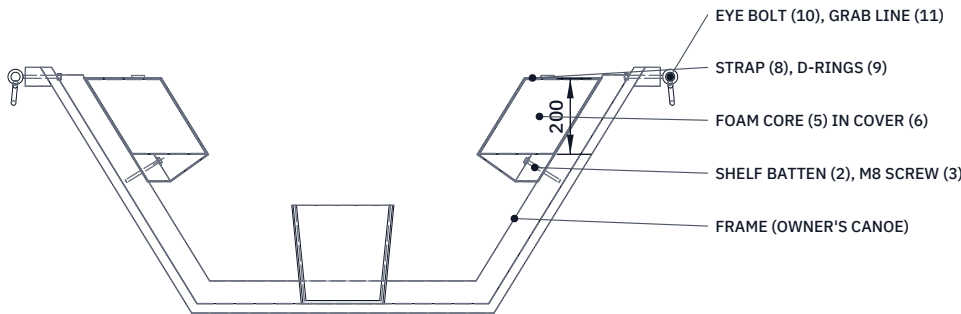

SECTION A-A

Scale 1:20; looking aft (along -X), 2.4 m from the transom (frame at 2.1 m behind)

MAIN SIZES AND FIGURES (MM UNLESS STATED)

Reference canoe 8,000 long, beam 1,600, depth 650, flare 31.6 deg

8 modules, 4 a side: 880, 1,400, 1,400, 1,100 long

Module 200 wide x 200 high, top 30 below gunwale

Module = four 50 PE foam layers in a tarpaulin sleeve (5, 6)

Battens 50 thick, 70 high, 40 past each module end

20 coach screws M8 x 100, one into every frame crossed

16 straps, 50 webbing, in the bays between frames

Chocks 40 long, 50 high, at both ends of every module

Eye bolts at 600, 2,400, 3,600, 5,400 from transom

Freeboard mark: top edge 50 below the gunwale, amidships

Swamped, design load: 105 freeboard amidships, 80 lowest

Third-angle; X from transom, Y to port; (n) = BOM line

LEVELHULL

github.com/BoujeeEnjinia1701/levelhull

Flotation retrofit in the reference canoe: general arrangement

DRAWING NO.

LVH-DWG-001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:50

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

Kit per bom/bom.csv; canoe is the owner's boat (reference shown). PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand