



CONCEPT, NOT FOR FABRICATION

LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

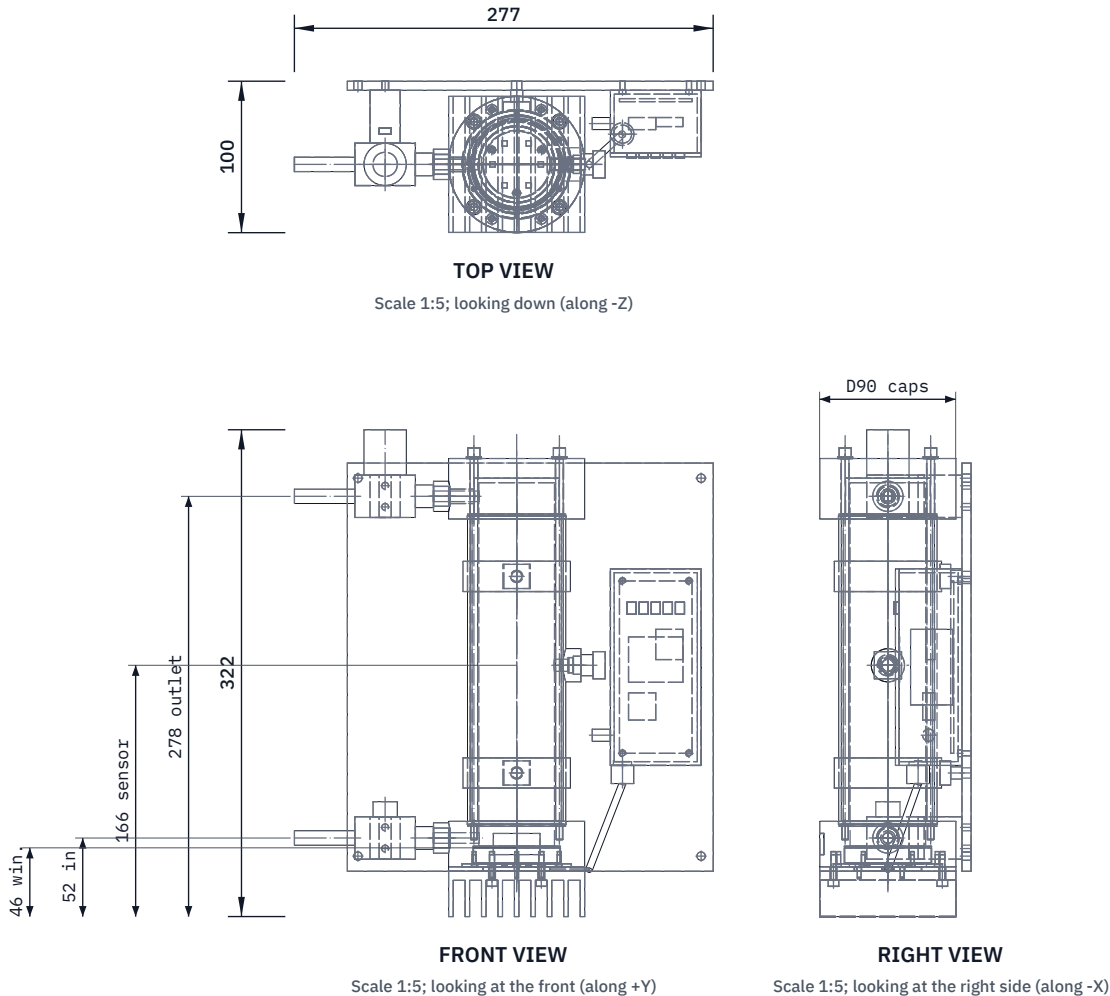

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	50 mm bore, wall dose sensor, M5 rods (LMF-DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-30	AC
P4	Design for construction (LMF-DDR-003)	2026-10-01	AC
P5	PTFE window washer, LED head plug, UV level bar, labels	2026-10-02	AC

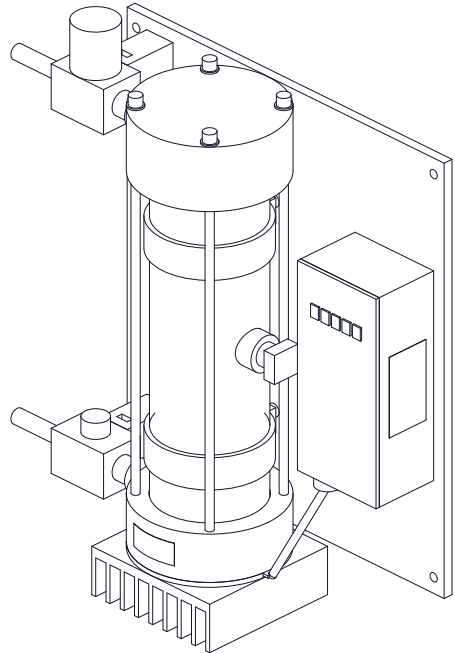

ISOMETRIC VIEW

Not to scale; adapter not shown; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Unit 277 W x 100 D x 322 H, adapter excluded
- Channel D50 x 242; ports at Z 52 and 278
- Dose sensor D8 window in tube wall at Z 166, facing +X
- Tube D65 x 3 wall x 200, 316; high-refl. PTFE liner D59
- Window D57 x 10 fused silica on a D51 seat
- 6 x 275 nm LEDs on a 32 mm circle, 1.3 mm below window
- Caps D90 x 30 (316) and x 40 (acetal); 4 x M5 studs on D80
- Ports 1/4 BSPP with push-fit stem adaptors; 316 outlet sleeve
- Heat sink 90 x 90 x 30, fins down
- Working pressure 8 bar; limiter at 4 bar upstream; flow up
- Window from below on a 0.5 PTFE washer and 316 ring; tube ends on face O-rings
- LED head plug with interlock loop under the enclosure; 5-segment UV level bar in the lid

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

General arrangement

DRAWING NO. LMF-DWG-001			REV P5	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 316 tube and lower cap, high-reflectance PTFE liner, fused silica window, acetal upper cap; see bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	