


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	PTFE washer under the window; no lapping	2026-10-02	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

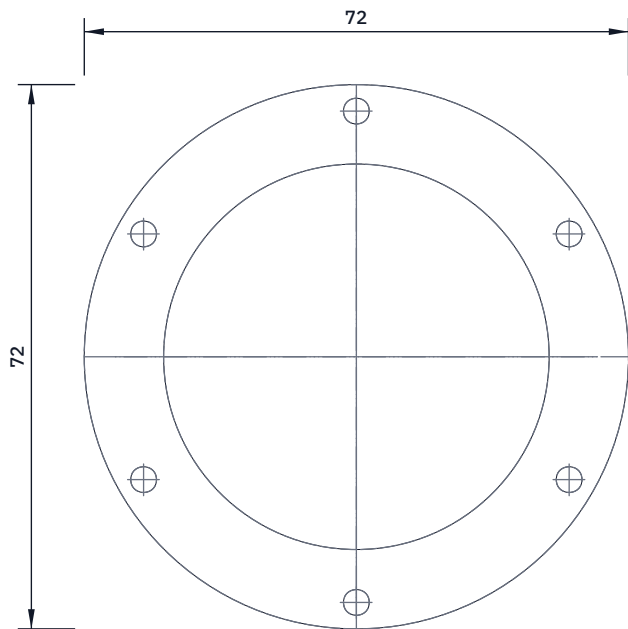


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

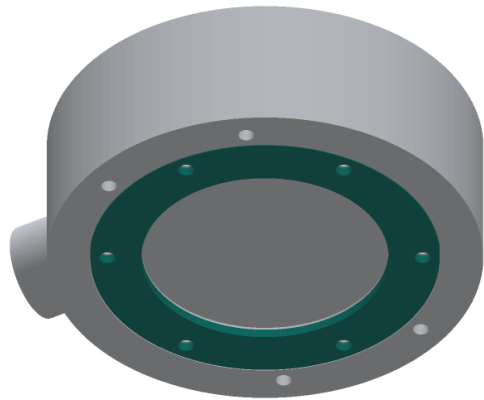

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut a ring 72 outside dia, 51 inside dia, from 2 mm 316.

Six 3.4 mm holes on a 65 dia circle, every 60 deg starting at 30 deg; countersink them 90 deg on the bottom (LED) face so M3 countersunk screws sit flush.

Flatten the top face if the cut left it bowed. The window does not touch it: a 0.5 mm PTFE washer, 57 outside and 51 inside, lies between the ring and the window.

Break the inside edge 0.3 mm. Passivate.

Fit: it sits in the 72.4 recess in the cap's bottom face, flush with that face. Six M3 x 8 screws into the cap, tightened evenly in a cross pattern to about 0.5 N m.

The 51 mm bore is the window's open span used in the stress calculation; do not open it out.

Check: flat within 0.1 mm across a straight edge.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow window retaining ring: making sketch

DRAWING NO. LMF-DWG-104		REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES 316 stainless sheet 2 mm; laser cut				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	