

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:2; looking down (along -Z)



FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

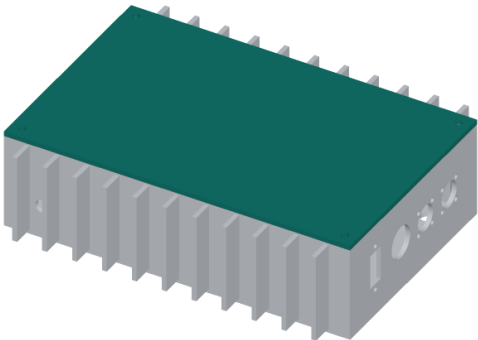

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lid: cut 220 x 140 mm from 3 mm sheet; deburr; round the corners to about 1 mm. Four 4.5 mm holes, 7.5 mm in from each end and side.

Gasket: cut from 1 mm closed-cell EPDM sheet, 220 x 140 mm outside, a 3 mm wide frame (the wall thickness), with a 12 mm round pad at each corner over the port and a 4.5 mm hole through each pad.

Use the lid as the template for the gasket's four holes.

Fit: gasket on the top of the tube, lid on the gasket, four M4 x 10 button-head screws with bonded sealing washers into the ports.

Tighten evenly in a cross pattern until the gasket is squeezed to about two-thirds of its thickness; do not crush it.

Check: lid sits flat; no gap you can see round the edge.

MotionCore lid and lid gasket: making sketch

DRAWING NO. MTC-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminum sheet 3 mm, 5052 or 6061; EPDM sheet 1 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand